ARCHAEOLOGICAL EXCAVATIONS AT THE KETTERING PARK SITE (18PR174) PRINCE GEORGES COUNTY, MARYLAND

Maryland State Highway Administration

Archaeological Report Number 78

MARCH 1994

Submitted to:

Maryland State Highway Administration
Baltimore, Maryland

ENGINEERING-SCIENCE, INC.
10521 Rosehaven Street
Fairfax, Virginia 22030

ES ENGINEERING-SCIENCE

Copies of this report are deposited at the following Maryland and Washington, DC locations:

Caudill Memorial Library
Department of Anthropology
The American University
4400 Massachusetts Avenue, N.W.
Washington DC 20016

Office of Professional Services
Division of Cultural Resources
National Park Service
1100 Ohio Drive, S.W.
Washington DC 20242
Attn: Stephen Potter

Baltimore Center for Urban Archaeology
802 East Lombard Street
Baltimore, MD 21202
Attn: Louise Akerson

Archeology Division
St. Mary's City Commission
St. Mary's City, MD 20686

Department of Anthropology
Marist Hall, Room 8
Catholic University of America
Washington DC 20064

Department of Anthropology
Archaeology Laboratory
University of Maryland
College Park, MD 20742

Maryland Historical Trust
Division of Historical and
Cultural Programs
Department of Housing and
Community Development
100 Community Place
Crownsville, MD 21032-2023

PRINCE GEORGE'S COUNTY
MNCPPC
History Division
George Washington House
4302 Baltimore Avenue
Bladensburg, MD 21710

PR
162
c. 2

ARCHAEOLOGICAL EXCAVATIONS AT THE KETTERING PARK SITE (18PR174) PRINCE GEORGES COUNTY, MARYLAND

Maryland State Highway Administration
Archaeological Report No. 78

by
Heidy Fogel
Dennis Knepper
Michael Petraglia

March 1994

Submitted to
Maryland State Highway Administration
Baltimore, Maryland

Engineering-Science, Inc.
10521 Rosehaven Street
Fairfax, Virginia 22030

ABSTRACT

A Phase I survey was conducted by Terrence Epperson in 1979 along the proposed dualization corridor of Maryland 214, Prince Georges County, Maryland. As a result of the survey, the Kettering Park Site (18PR174) was identified. In 1983, Maureen Kavanagh and Silas Hurry directed a Phase II testing program at Kettering Park. Phase II testing consisted of the excavation of systematic shovel tests and 11 one meter-square test units. At the conclusion of the testing program, it was determined that the prehistoric occupation of the Kettering Park Site spanned from the Early Archaic to the Late Woodland. The vertical distribution of artifacts indicated the presence of a Late Archaic/Early Woodland transitional component contained in subplowzone deposits, or the A2 horizon. Based on these results, the site was considered to be eligible for inclusion in the National Register of Historic Places under Criterion D and Phase III data recovery excavations were proposed. A research design was developed to address issues relating to prehistoric settlement and technology. Kavanagh and Hurry conducted Phase III excavations at the site in 1985 to mitigate any adverse effects to the site which would be caused by construction activities. A 10% sample was obtained through the excavation of 13 two-meter square units. In 1993, Engineering-Science Inc., was contracted with the State Highway Administration to synthesize the field and laboratory results and to write the combined Phase II-III report.

Synthesis and analysis of the data indicates that the Kettering Park Site consists of varying combinations of Archaic and Woodland lithic and ceramic artifacts in plowzone and stratified contexts. Based on the density of ceramics and temporally diagnostic projectile points, the Late Archaic and the Early Woodland periods are considered the most significant occupation of the site. Diagnostic artifacts of the Early Woodland period included the largest sample of Accokeek ceramics recovered from any site along the Patuxent drainage. Analysis of the horizontal distribution of artifacts identified potential activity areas -- in particular, lithic manufacturing areas. The goals of the data recovery program were implemented and met, mitigating the adverse effect of construction on the site. Since concluding the field work, the Maryland State Highway Administration completed construction of the dualized road segment.

TABLE OF CONTENTS

ABSTRACT i
TABLE OF CONTENTS ii
LIST OF FIGURES iv
LIST OF TABLES vii
ACKNOWLEDGEMENTS viii

I. INTRODUCTION 1

II. ENVIRONMENTAL BACKGROUND 5

III. PREHISTORIC ENVIRONMENT, OCCUPATION, AND LAND USE 7

IV. HISTORIC LAND USE 15

V. OVERVIEW OF FIELD INVESTIGATIONS 19

VI. LABORATORY METHODS 31

VII. ARTIFACT ANALYSES 39

VIII. RESIDUE ANALYSIS 97

IX. SITE INTEGRITY AND SPATIAL ANALYSES 99

X. GENERAL CONCLUSIONS 131

REFERENCES CITED 145

APPENDICES

A List of Personnel
B Soil Report
C Artifact Inventory Codes
D Artifact Inventory, Phase I, II and III
E Ceramic Measurements
F Biface Measurements
G Uniface Measurements
H Core Measurements
I Ground/Use-Modified Measurements
J Maryland Archeological Site Survey Form (Updated)

LIST OF FIGURES

Figure 1: Maryland Research Unit Map 2

Figure 2: Project Location Map 3

Figure 3: Areas Investigated During Phase II Testing and Phase III Data Recovery Excavations 21

Figure 4: Site Plan With STPs, Test Units, and Excavated Units Located 23

Figure 5: Typical Soil Profile: N135/W95 North Profile 25

Figure 6: Ceramic Frequency by Period 41

Figure 7: Early Woodland Ceramics by Types 42

Figure 8: Accokeek Rim Sherds 44

Figure 9: Accokeek Rim Sherds 45

Figure 10: Accokeek Rim Sherds 48

Figure 11: Normanskill Points 54

Figure 12: Bare Island Points 56

Figure 13: Brewerton Ear-Notched Points 59

Figure 14: Fishtail Projectile Points 60

Figure 15: Lamoka-Like Point 62

Figure 16: Susquehanna Broadspear Points 64

Figure 17: Untyped Late Archaic Straight-Stemmed Points 67

Figure 18: Calvert Point 68

Figure 19: Piscataway Points 70

Figure 20: Potts Corner-Notched Point 72

Figure 21: Vernon Points 75

Figure 22: Untyped Side-Notched Point 76

Figure 23: Triangular Points 80

Figure 24: Stage 1 and Stage 2 Bifaces 83

Figure 25: Stage 3 Biface 84

Figure 26: Graver 85

Figure 27: Side Scraper 86

Figure 28: Core Morphology, Frequency by Types 89

Figure 29: Multifacial Flake Cores by Frequency of Material 90

Figure 30: A Sample of Bipolar Cores 93

Figure 31: Debitage by Material 94

Figure 32: Flake Morphology by Material 94

Figure 33: Bannerstone Fragment 95

Figure 34: Quartz Debitage Distribution from STPs 105

Figure 35: Quartz Debitage Distribution from Units 106

Figure 36: Rhyolite Debitage from the A1 Horizon 109

Figure 37: Rhyolite Debitage from the A2 Horizon 110

Figure 38: Rhyolite Bifaces From the A1 Horizon 111

Figure 39: Chert Debitage From the A1 Horizon 112

Figure 40: Ceramics Recovered from STPs 114

Figure 41: Ceramics Recovered from the A2 Horizon 115

Figure 42: Fire-Cracked Rock from the A1 Horizon 116

Figure 43: Fire-Cracked Rock from the A2 Horizon 117

Figure 44: Projectile Point Distribution for Early and Middle Archaic Periods 119

Figure 45: Projectile Point Distribution for Late Archaic/Early Woodland Periods . . . 120

Figure 46: Projectile Point Distribution for the Late Woodland Period 121

Figure 47: Bipolar Core Distribution from STPs and Phase II and Phase III Units . . . 123

Figure 48: Quartz Debitage from the A2 Horizon 124

Figure 49: Quartz Decortication Flakes from the A2 Horizon 129

Figure 50: Quartz Cores from the A2 Horizon 130

Figure 51: Material Utilization for Bifaces of All Types 142

LIST OF TABLES

Table 1: Correlations Between Elevations and Levels for Top of A2 Horizon 29

Table 2: Prehistoric Artifact Type Frequencies By Phase 40

Table 3: Rim Sherds 46

Table 4: Rim Profiles for Accokeek Cord-Marked 47

Table 5: Lip Treatment for Accokeek Cord-Marked 47

Table 6: Biface Types By Material 52

Table 7: Projectile Point Fragments by Material and Fragment Type 81

Table 8: Retouched Debitage by Material 87

Table 9: Cores by Type and Materials 88

Table 10: Diagnostics Recovered from Excavations by Horizon 101

Table 11: Quartz Manufacturing Materials From Possible Activity Areas in the A1 Horizon 125

Table 12: Quartz Manufacturing Materials from Possible Activity Areas in the A2 Horizon 127

Table 13: Comparison of Patuxent River Survey Chronology with Temporal Diagnostics from the Kettering Park Site 133

ACKNOWLEDGEMENTS

The Maryland State Highway Administration supported the field, laboratory, and report writing stages of the Kettering Park Site investigations. The Kettering Park Site investigations would not have been completed without the contributions of many individuals. The Phase II and III field projects were directed by Maureen Kavanagh and Silas Hurry. The field crew for the Phase II testing program included Edward Chaney, Katherine Dinnel, and Spencer Geasey. The Phase III excavation crew members were Stephanie Crockett, Katherine Dinnel, Timothy Doyle, Elizabeth Leigh Hutchenson, William Huser, Janet Gillis, Alison Helms, and Timothy Sara.

The artifacts recovered during the Phase II investigations at the Kettering Park Site were processed by Edward Chaney and Katherine Dinnel. After the processing of the Phase II artifacts was completed, members of the former Maryland Division of Archeology developed a detailed computer cataloguing system. This system was used by Carol Ebright and William Huser to record the Phase III artifacts. Carol Ebright and Maureen Kavanagh re-catalogued the Phase II artifacts utilizing the computer system in order to make the databases for these two phases of excavation more consistent. The original ceramic analysis for Phase II artifacts was completed by Katherine Dinnel. Subsequently, Maureen Kavanagh expanded this work and these results were incorporated into the Phase II and Phase III ceramic sections of this report. Carol Ebright completed the preliminary lithic analysis.

Engineering-Science's compilation of data and report synthesis could not have been completed without the generous assistance and contributions of Carol Ebright. Maureen Kavanagh and Silas Hurry provided valuable comments on an earlier draft report. A list of key individuals involved in the project appears in Appendix A.

I. INTRODUCTION

The Maryland State Highway Administration dualized Maryland 214 (Central Avenue) in Prince Georges County, Maryland. The construction upgraded the former two-lane road and added another two-lane thoroughfare south of the right-of-way. The upgraded road corridor measured 5.4 miles in length, stretching from Interstate 495 east to Hall. The construction also realigned the Interstate 495 - Maryland 202 segment slightly to the north, and upgraded the Maryland 214 - Maryland 202 intersection at Largo.

In 1979, Terrence Epperson directed a Phase I survey of the proposed Maryland 214 project corridor. The survey was restricted to a 300-foot-wide easement along the existing road and a 300-foot-wide area surrounding the Maryland 214 - Maryland 202 intersection at Largo. The goal of the Phase I survey was to locate and identify any archaeological sites located in the project area. The Kettering Park Site (18PR174) was discovered during the survey. The site was situated in the Riverine Patuxent Drainage Research Unit at the confluence of the Western and Northeastern Branches of the Patuxent River (Figures 1 and 2). Phase II investigations were proposed because of the site's location in the construction area and its potential eligibility for inclusion in the National Register of Historic Places (Epperson 1979:8).

Maureen Kavanagh, M.A., and Silas Hurry, B.A., directed Phase II excavations in April and May 1983. The objectives of the Phase II testing program were to determine site integrity, site boundaries, cultural affiliation, and to evaluate the Kettering Park Site's eligibility for inclusion in the National Register of Historic Places. Upon completion of the Phase II investigations, more intensive excavations were recommended because observations and preliminary the data analysis suggested that intact Early Woodland deposits were present at the site. Although a draft report of the Phase II work was prepared by Maureen Kavanagh, it was not completed due to the imminence of Phase III excavations.

The Maryland State Highway Administration and the Maryland Historical Trust agreed that the Kettering Park Site was eligible for listing on the National Register of Historic Places for its ability to yield information about prehistory. The goal of the Phase III excavations was to mitigate any adverse effects to the site caused by construction activities. An in-depth research design was developed to direct the site excavations. Phase III excavations, directed by Maureen Kavanagh and Silas Hurry, were carried out in November and December 1985.

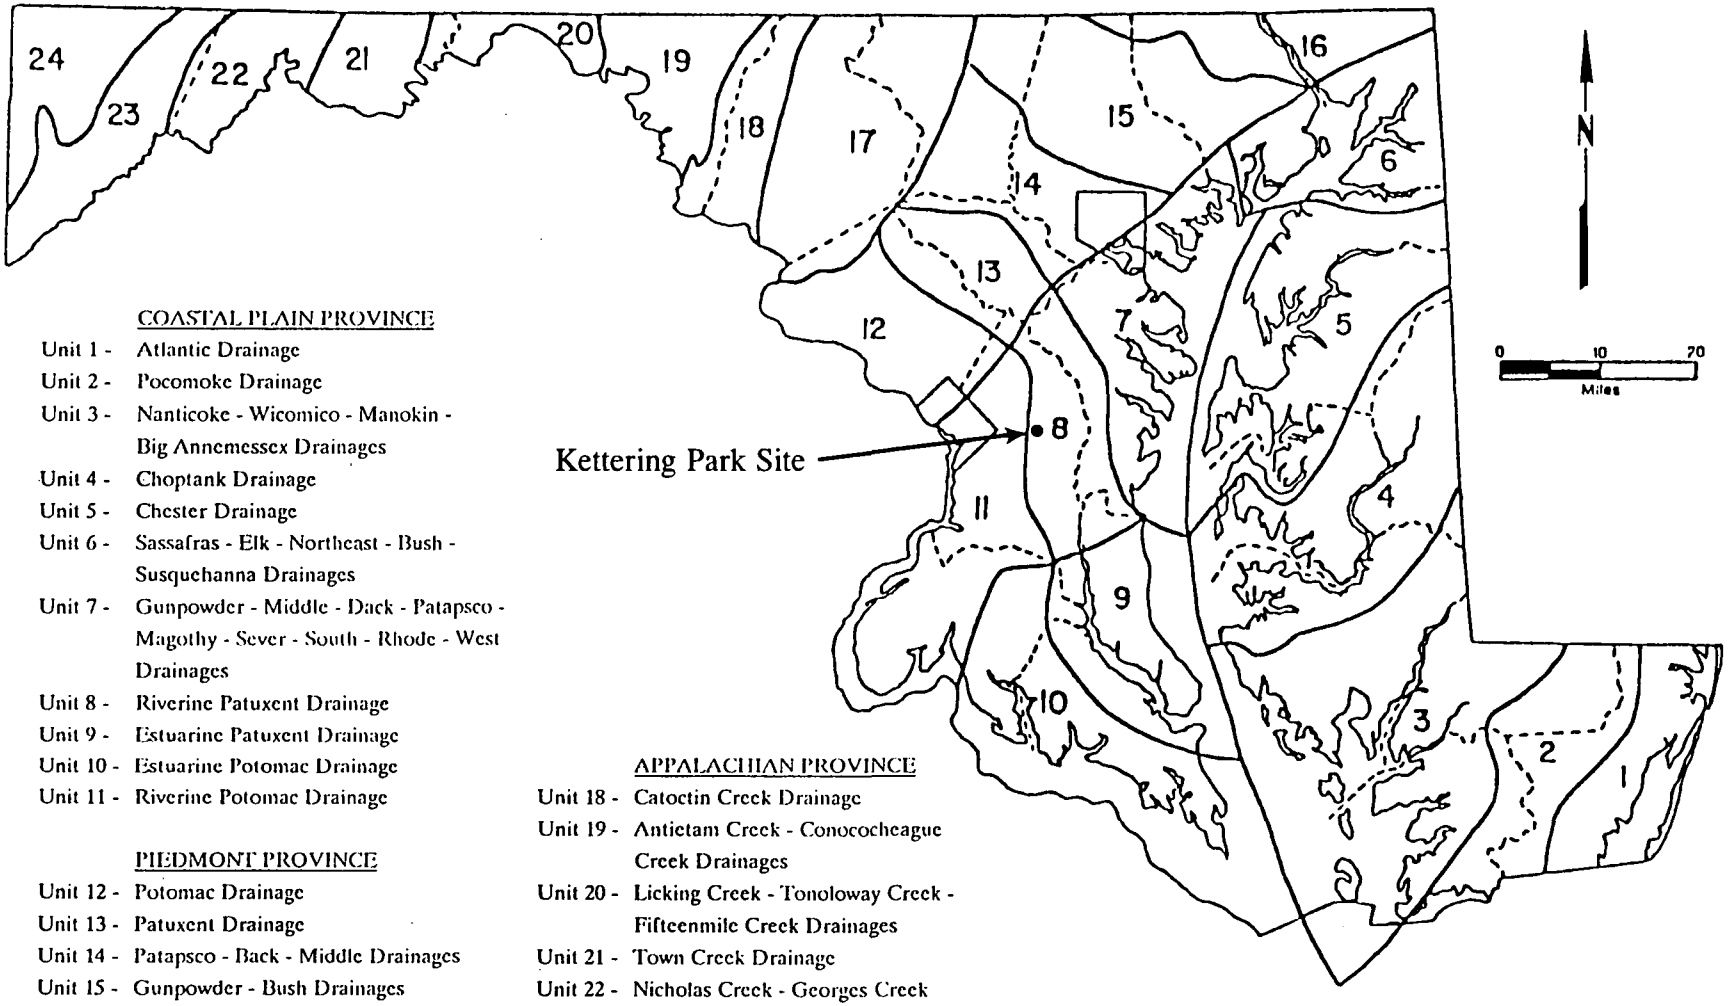

COASTAL PLAIN PROVINCE

Unit 1 - Atlantic Drainage
Unit 2 - Pocomoke Drainage
Unit 3 - Nanticoke - Wicomico - Manokin - Big Annemessex Drainages
Unit 4 - Choptank Drainage
Unit 5 - Chester Drainage
Unit 6 - Sassafras - Elk - Northeast - Bush - Susquehanna Drainages
Unit 7 - Gunpowder - Middle - Back - Patapsco - Magothy - Sever - South - Rhode - West Drainages
Unit 8 - Riverine Patuxent Drainage
Unit 9 - Estuarine Patuxent Drainage
Unit 10 - Estuarine Potomac Drainage
Unit 11 - Riverine Potomac Drainage

PIEDMONT PROVINCE

Unit 12 - Potomac Drainage
Unit 13 - Patuxent Drainage
Unit 14 - Patapsco - Back - Middle Drainages
Unit 15 - Gunpowder - Bush Drainages
Unit 16 - Susquehanna - Elk - Northeast Drainages
Unit 17 - Monocacy Drainage

APPALACHIAN PROVINCE

Unit 18 - Catoctin Creek Drainage
Unit 19 - Antietam Creek - Conococheague Creek Drainages
Unit 20 - Licking Creek - Tonoloway Creek - Fifteenmile Creek Drainages
Unit 21 - Town Creek Drainage
Unit 22 - Nicholas Creek - Georges Creek Drainages
Unit 23 - Potomac - Savage Drainages
Unit 24 - Youghiogheny - Casselman Drainages

Source: Council for Maryland Archeology

Kettering Park Site

Figure 1
Maryland Research
Unit Map

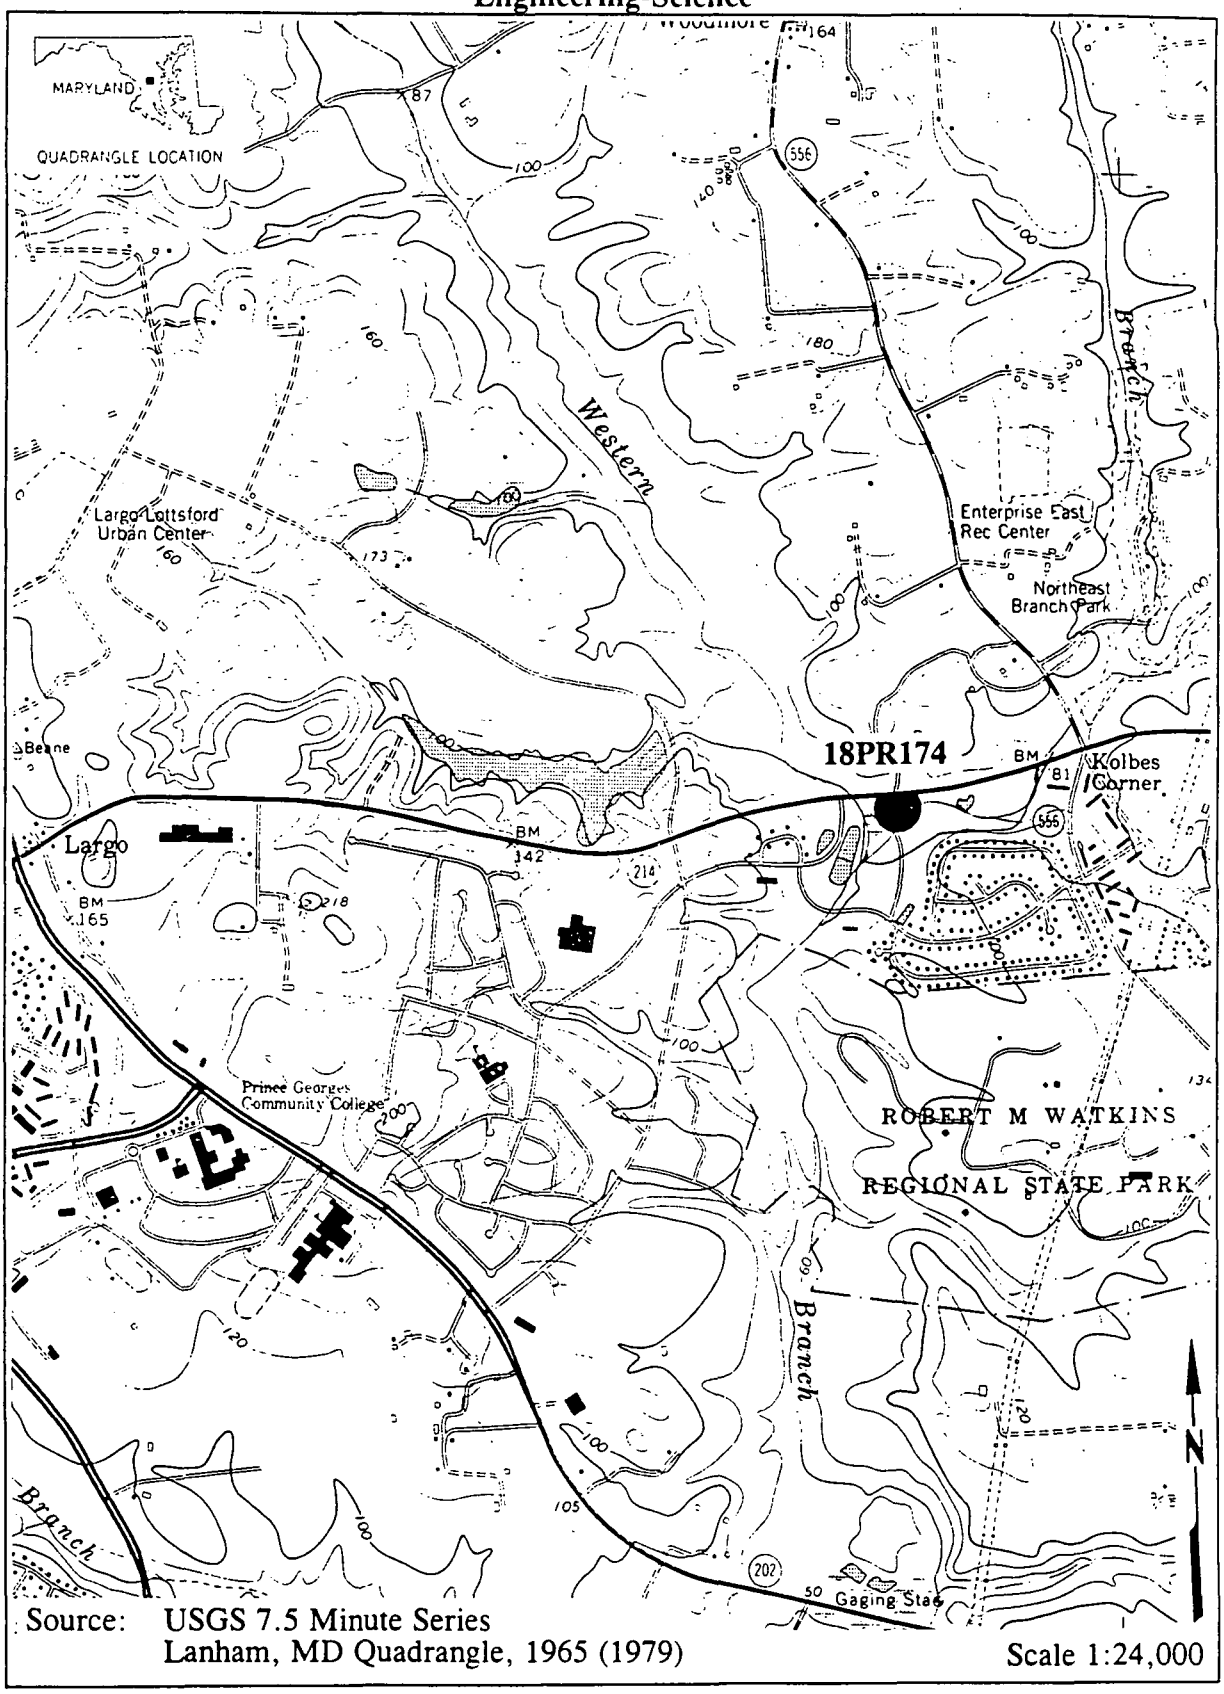

Source: USGS 7.5 Minute Series
Lanham, MD Quadrangle, 1965 (1979)

Scale 1:24,000

Kettering Park Site

Figure 2
Project
Location Map

In 1993, the Cultural Resources Department of Engineering-Science, Inc., was contracted by the Maryland State Highway Administration to complete the artifact analysis and to write a combined Phase II-III report. All artifacts, dBase III+ files, preliminary reports, and field notes were provided to assist in preparing this report. However, the report was written without the benefit of the Phase II and III field photographs. This report synthesizes the Phase II and III field and laboratory results. It also contains analysis of all lithic and ceramic artifacts recovered at the Kettering Park Site.

The archaeological investigations were performed in compliance with the National Historic Preservation Act of 1966, as amended; the National Environmental Policy Act of 1969, as amended; the Department of Transportation Act of 1966, as amended; the "Consultant Specifications for Archaeological Services" of the Maryland State Highway Administration; the Maryland Historic Trust Act of 1985, as amended; and the "Guidelines for Archeological Investigations in Maryland" (McNamara 1981).

II. ENVIRONMENTAL BACKGROUND

Setting

The Kettering Park Site is located on a low alluvial terrace situated on the south side of Maryland 214, between Largo and Kolbes Corner (Figure 2). The site is at the confluence of the Western and Northeastern Branches of the Patuxent River, about 22 m above sea level. The area lies within the Western Shore Region of the Atlantic Coastal Plain physiographic province. The Coastal Plain physiographic province is marked by gently rolling topography cut by broad, meandering water courses.

The Maryland 214 corridor crossed three tributaries of the Patuxent River. These tributaries are a second-order tributary called the Southwest Branch, and two third-order tributaries known as the Western Branch and the Northern Branch. The construction along Interstate 495 and the Interstate 495 - Maryland 202 interchange displaced the Southwest Branch tributary. Channelization of the Northern and Western Branch streams occurred between 1965 and 1979 (Kavanagh n.d.). Proximity to these branches has contributed to stream sediment deposition, erosion, and flooding along the site edges. The study area also has been impacted by both urban and agricultural developments.

Climate

The region's climate is described as continental, being temperate and at times humid. Weather systems generally move through the area from the northwest in winter and the southeast in summer. Modern temperatures range from an average high of 87.8 degrees Fahrenheit in July to an average low of 24.2 degrees Fahrenheit in February, with a year-round mean of 55 degrees. Average annual precipitation totals approximately 45 inches, with the highest amounts falling from May through August. Of the total precipitation, an average of 1.9 to 2.0 inches falls in the form of snow (with one inch of snow calculated as 0.10 inches of precipitation). Both temperature ranges and rainfall are slightly greater than those in adjacent areas on the Coastal Plain, where the ameliorating effects of the Chesapeake Bay and Atlantic Ocean are more directly felt. In winter, higher humidity and precipitation often result from northeasterly winds off the Atlantic, while the Appalachians to the west help to moderate the coldest temperatures (Mack 1966; Kirby *et al.* 1967).

Flora and Fauna

Prior to European colonization, most of the area that now comprises Prince Georges County was forested, containing primary stands of hardwoods, such as red and white oak, sweet gum, and yellow-poplar. Virginia pine has become a subdominant species in cleared regions. An often thick understory lies at the base of the secondary hardwood stands, particularly in wet or marshy areas, and includes Virginia creeper, myrtle, sumac, and the ubiquitous greenbriar and poison ivy. A variety of grasses may also flourish in portions of cleared areas.

Deer, whose breaks are evident in clearings across the region, are the largest mammals remaining in the area, and are drawn particularly to woodland locales, which also attract raccoon, grey and red squirrel, turkey, ruffed grouse, woodcock, and thrush. Open areas may attract rabbit, woodchuck, red fox, quail, dove, meadowlark, and pheasant. A variety of small mammals, birds, and reptile species also inhabit the stream margins and overlying terraces. Raccoon, muskrat, duck, geese, rail, and heron are found in wetland areas. Though larger migratory fowl are generally confined to tidal wetlands to the south along the Anacostia and upper Potomac Rivers, geese can be observed in non-tidal wetland areas. Small freshwater fish inhabit larger order streams. Anadromous and semi-anadromous species have been observed in the Northeast Branch just below the study area (Lippson *et al.* 1979). Siltation within the tributaries, resulting from historic land clearing for agricultural and industrial use, has probably limited the upstream extent of these spawning areas, which may in the past have extended up smaller streams such as Paint Branch, Indian Creek, and Beaverdam Creek.

III. PREHISTORIC ENVIRONMENT, OCCUPATION, AND LAND USE

The prehistory of Prince Georges County and the Middle Atlantic region in general is traditionally divided into three major cultural periods: the Paleo-Indian (ca. 10,000 B.C. - 7500 B.C.), the Archaic (ca. 7500 B.C. - 1000 B.C.), and the Woodland (ca. 1000 B.C. - A.D. 1600). These periods are used as a taxonomic device, a framework within which to examine the cultural processes operating throughout prehistory. The evidence for their demarcation is derived from transformations in technology, or material culture as seen through the study of stone and ceramic artifacts. Archaeology operates, by definition, from a materialistic perspective, focusing on the study of technology. Many of the technology products tend to be quite durable and, by surviving to the present, these materials become the most directly observable aspects of past cultures available to the analyst. Technology is seen as a means of adaptation to the surrounding environment. Thus, a study of the physical environment of a region and the alterations it has undergone during periods of human occupation may furnish insight into the nature and availability of habitats suitable to prehistoric populations, and thereby provide a background for the description of cultural change as seen through artifact variation.

Paleo-Indian Period

The record of human habitation in the Middle Atlantic region begins some 12,000 years ago, near the end of the cool and relatively wet Late Wisconsin Glacial period, at a time when large amounts of water remained trapped in the Laurentian ice sheet not far to the north. The edge of the ice was preceded by a narrow, 60- to 100-km band of open tundra, while most of the Coastal Plain to the south was dominated by jack pine forest with a subdominant component of spruce and fir (Delcourt and Delcourt 1981). Global sea levels were considerably lower than at present, and so the Potomac and Anacostia Rivers to the west were as yet freshwater river valleys.

By this period, environmental shifts were in progress that greatly enhanced subsistence resource potential for the prehistoric inhabitants of the region. With the retreat of the northern glaciers, the entire Middle Atlantic was undergoing a fairly rapid warming trend (Carbone 1986), which was directly reflected in the replacement of northern plant and animal species by southern types. A mixed conifer/northern hardwood forest interspersed with open grassland expanded northward from the Carolinas, for example, gradually replacing existing jack pine/spruce forests (Delcourt and Delcourt 1981). Like much of the region in general, northern Prince Georges County was characterized by a relatively complex set of overlapping microenvironmental zones, providing a variety of subsistence resources for prehistoric

populations. The large Pleistocene-era grazing and browsing animals, associated with Folsom and Clovis cultures in the West, were by this point mostly gone from the Middle Atlantic region. Smaller herds would have been present within forested areas in the Middle Atlantic, and the woods and transitional zones would have supported a much wider range of floral and small faunal species than the western savannahs (Wesler *et al.* 1981). Consequently, big game hunting may have been a somewhat less important part of the subsistence round, augmented substantially by exploiting a seasonal variety of other plant and animal resources (Humphrey and Chambers 1977; Johnson 1986; Custer 1989).

Archaeological sites dating to this period are usually identified by the presence of fluted stone projectile points, often made of high quality, cryptocrystalline lithic material such as chert or jasper. These points, used as spear tips, are relatively rare throughout the Middle Atlantic. The points are usually found alone, without other artifacts nearby, and it is unclear whether they represent camp sites or hunting forays.

The region's most intensively studied Paleo-Indian sites are situated in the Shenandoah Valley of Virginia. Excavation of these sites has indicated that Paleo-Indian base camps tend to be situated in areas of high resource diversity, particularly near sources of cryptocrystalline stone (Gardner 1974, 1989). Other smaller, more temporary camp sites were situated nearby to serve a variety of purposes, and even more ephemeral hunting camps were often situated further still from the base camp location. A similar pattern has been noted for areas where cryptocrystalline stone is available in northern Delaware (Custer and DeSantis 1985). In central Delaware, where high quality lithic material is not available, Custer and DeSantis (1985) have suggested that base camps tended to be associated with topographic features rather than with lithic resource concentrations; sites were most often located on well-drained ridges in areas of maximum habitat overlap (Custer and DeSantis 1985). While cryptocrystalline materials appears to be preferred for the production of Paleo-Indian projectiles, there are examples, such as the Higgins site, in Anne Arundel County, which contains Clovis points made from quartz (Ebright 1992).

Relatively few Paleo-Indian sites have been reported throughout the Middle Atlantic. It is probable that many were located on the continental shelf and are now submerged by the rise in sea level which accompanied the melting of the polar ice sheets at the end of the Wisconsin glaciation, ca. 14,000 B.P. (Kraft and John 1978). Others probably lay along the banks of now drowned rivers such as the Potomac and Anacostia. Fluted points have been reported from locations to the west in Fairfax County, Virginia (Johnson 1986) and to the east from nearby sections of the Maryland Coastal Plain (Steponaitis 1980; Brennan 1982; Wanser 1982; Ebright

1992). Though many are in fact from unprovenienced collections, a sample with good context was reported at the Higgins site in Anne Arundel County (Ebright 1992).

Archaic Period

The Archaic Period extended from ca. 7500 B.C. to 1000 B.C. It was characterized by response to the emergence of the so-called full Holocene environment, an environment increasingly like that of the present (Joyce 1988). Seasonal population migration, hunting and gathering subsistence, and small-scale egalitarian social systems were typical of the period. Major subperiods are recognized within the Archaic Period, referred to as Early, Middle, and Late.

One of the most important environmental changes affecting prehistoric populations throughout the Middle Atlantic region during the Archaic Period was the gradual rise in sea level accompanying the retreat of the continental ice sheets. Known as the Holocene marine transgression, the rise in sea level produced widespread lowland flooding, which extended up many Pleistocene river valleys, giving rise to the term "drowned" river valley. Among the effects of inundation were a marked rise in local water tables, an increase in shoreline complexity associated with estuary development, and the consequent increase in floral and faunal resources in newly formed marsh or wetland areas (Potter 1982).

The rate of sea level rise, and thus of estuary formation, was not constant throughout the period. Sea level curves have been constructed for various locations along the eastern seaboard; they show an interval of fairly rapid increase in the rate of sea level rise from 10,000 B.C. to 6000 B.C., followed by a marked decrease (Stuiver and Daddario 1963). Inundation of the Susquehanna River system, which resulted in the formation of the Chesapeake Bay, began with the initial rise in sea level between 14,500 and 14,000 B.C. By 9500-9000 B.C., marine transgression had reached the mouth of the Potomac, below what is today Point Lookout (Wanser 1982). The Bay appears to have reached something resembling its present configuration by around 3000 B.C., and largely stabilized at that point, as the rate of inland inundation decreased drastically, allowing the maturation of estuary areas (Gardner 1979; Delcourt and Delcourt 1981).

In practice, shoreline reconstructions for specific areas may vary markedly from global or pan-regional models. Local reconstructions must account for local conditions, such as sedimentation rates and regional tectonic movement -- land has risen recently in many portions

of the Middle Atlantic, for example (Froomer 1980). The Anacostia River, at the upper end of the Potomac estuary basin, would have been among the last tributaries to become inundated. Though extensive studies have not been carried out along the Anacostia, core samples from two locations suggest that flooding began there between 7000 and 5000 B.C. (National Preservation Institute 1983).

Early Archaic

Most archaeologists agree that there is some continuity between the Paleo-Indian and the Early Archaic Periods (Gardner 1974; Custer 1989). While there is evidence for an increase in the number of sites, the Early Archaic inhabitants of the area, like their predecessors, probably exhibited high mobility and enjoyed a varied subsistence base. Intensified foraging may be assumed from the more transitory use of resource areas, suggested by the presence of smaller sites. The pollen record indicates that forests of the Middle Atlantic were oak-dominated by 7000 B.C., but also contained significant populations of hemlock, maple, birch, and pine, with spruce still evident at higher elevations (Joyce 1988).

The Early Archaic Period (ca. 7500 B.C. - 6500 B.C.) is marked by the introduction of several new projectile point styles. Among the cultural diagnostics of this period are the corner-notched, serrated Palmer and Kirk points; and the slightly later Kirk-stemmed types. A change in preference from cryptocrystalline to non-cryptocrystalline lithic materials appears to have become significant in portions of the Coastal Plain during the middle portion of the Early Archaic. Custer (1986) has noted a markedly greater occurrence of quartz and quartzite, for example, in Kirk-stemmed points than in the earlier types, which were largely manufactured of chert or jasper, this beginning about 7500 B.C. in Delmarva. Use of non-cryptocrystalline materials continued to grow significantly throughout the rest of the Early Archaic, to approximately 6000 B.C. Custer further notes that the change occurred after the switch from fluting to notching as a base or hafting element feature. Thus he associates the change in raw material selection with the onset of the "full Holocene environment," and not with morphological change. Doubtless the interplay of several factors -- population mobility, specific resource focus, lithic resource access, and hunting strategy among them -- was involved in the variation in lithic choice. Nonetheless, stability in the pattern of resource exploitation from the Paleo-Indian to the Early Archaic Period appears to have been the general rule.

Middle Archaic

By the Middle Archaic Period (ca. 6500 - 2500 B.C.), local populations were exploiting the new floral and faunal resources brought by the transformation of the mixed pine-oak forest

to a temperate oak-hemlock deciduous forest, beginning around 6,000 B.C. (Ritchie 1979). At this time also, a 1,000-year period of relative dryness was coming to a close (Joyce 1988). Pollen profiles from the Middle Archaic Period indicate the change in forest elements in the Middle Atlantic. Hemlock abruptly declined about 5000 B.C., and hickory continued to migrate into the area (Joyce 1988). Large marshes and swamps resulting from the ongoing inundation of coastal waterways became an important focus of occupation during the period, with seasonally specialized, transient procurement stations functioning as support facilities for estuarine base camps (Gardner 1979; Custer 1986).

The Middle Archaic artifact assemblage includes projectile point forms such as a transitional bifurcate type, the stemmed Stanly or Neville, and early long- or broad-bladed forms such as Guilford and Morrow Mountain. Later, the side-notched Halifax point (Coe 1964; Johnson 1986) is quite common in the area and this type is predominantly made of quartz. The tool kit was further marked by the appearance of ground stone tools.

Late Archaic

The succeeding Late Archaic Period (ca. 2500 B.C. - 1000 B.C.) was characterized by the prevalence of the oak-hickory forest environment. The rate of sea level rise slowed, allowing for the formation of riverine and estuarine environments stable enough to support significant populations of shellfish and anadromous fish in larger streams (Custer 1984; Gardner 1979). Sturgeon runs at the upper end of the Potomac were described by the earliest European explorers (Fleet in Neill 1876), and runs of American shad, white perch, herring, and alewife are recorded historically along tributaries of the Potomac and Anacostia above the fall line (Lippson *et al.* 1979). It is speculated that the focus of settlement shifted during the Late Archaic Period to riverine and estuarine locales to take advantage of increasingly predictable fish and shellfish resources.

For the Late Archaic Period, a marked increase in the number of sites is observed, suggesting both an overall population increase (Turner 1978) and movement into new environmental zones. Some sites in the riverine and estuarine areas tend to be larger and more complex than any occupied during previous periods, thereby indicating a trend toward sedentism and organized resource procurement strategies (Johnson 1986). Gardner (1982) maintains that, in the fall line region, large Late Archaic spring/summer base camps existed where large numbers of anadromous fish could be harvested, while smaller fall/winter base camps were situated along inland streams. Transient camps were located in a variety of environments offering additional support to the large and small base camp occupations.

Cultural diagnostics of this period included steatite vessels and several types of broad-bladed points -- the Savannah River and Susquehanna broadspears -- found mainly in the Piedmont. Possibly serving as knives, these broader points may have been designed in part to exploit the new riverine resources. In many areas, particularly in the Piedmont to the west and north of the study area, rhyolite was the preferred lithic material for the manufacture of broad-bladed points, which are often found in association with vessels carved from steatite (Witthoft 1953; Ritchie 1965).

Woodland Period

Around 1000 B.C., techniques for the manufacture of pottery were introduced across the region. This innovation defines the beginning of the Woodland Period, which, like the Archaic, is traditionally divided into Early, Middle, and Late sub-periods.

Correlations between projectile point types and ceramic types are not well established for many portions of the Woodland in the Middle Atlantic: ceramics, which tend to have the more discretely defined time ranges in these later periods, have become the primary temporal indices. For example, some broad-bladed fishtail projectile point forms, characteristic of the end of the Late Archaic, have been associated with Early Woodland ceramics in the Chesapeake Bay area and the Upper Delaware Valley (Kinsey 1972; Wright 1973; Wesler 1983), and at a Woodland period fishing site in Washington, D.C. (McNett and Gardner n.d.). There is also evidence that smaller side-notched points and the slightly thinner Potts (Winfree 1967; Johnson 1986) were associated with Early Woodland ceramics, as was the short-stemmed Calvert point (Stephenson and Ferguson 1963; Waselkov 1982).

Early Woodland

The earliest known ceramic in the area, used from about 1200 B.C. to 800 B.C., is a steatite-tempered variety referred to as Marcey Creek ware after its type site on the Potomac River in Arlington County, Virginia (Manson 1948). Its distribution range encompassed most of the Potomac River basin north of the James River and spread westward into the lower Piedmont (Egloff and Potter 1982). A radiocarbon date of 950 $\pm$ 95 B.C. was obtained from western Maryland for Marcey Creek pottery (Boyce and Frye 1986; Waselkov 1982). A subsequent diagnostic ceramic type of the Early Woodland Period is the sand and grit-tempered Accokeek ware in use from about 800 B.C. to 300 B.C.

Environmental stabilization in the Early Woodland Period (ca. 1000 B.C. - 500 B.C.) is evidenced by the lack of change in forest components in the region. These cores indicate the predominance of oak, hickory, and pine in the latter portion of the Archaic, around 3400 B.C. In general, environmental conditions remained the same to the present (Joyce 1988), except for relatively minor fluctuations such as the somewhat cooler and wetter sub-Atlantic period, ca. 2500 B.C. (Carbone 1986). A recent increase in pine, along with grasses and other non-arboreal species, reflects the extent of historic land clearing.

In general, the Late Archaic lifestyle continued into the Early Woodland Period. While the deliberate and intensive foraging strategies of the preceding period appear to have remained unchanged, there is some evidence for an increase in sedentism as the inhabitants of the area became more efficient in exploiting available resources. Gardner (1982) has postulated that, rather than breaking up into small base camps in interior freshwater settings, occupants of the large spring/summer base camps in anadromous fishing zones regrouped in the fall and winter near the freshwater/saltwater transition to take advantage of the abundant shellfish resources there.

Middle Woodland

Subsistence practices during the Middle Woodland Period (ca. 500 B.C. - A.D. 900) remained similar to that of the preceding Early Woodland, with a reliance on hunting, gathering, and fishing. There is some evidence for a shift in the locations of semi-sedentary base camps from small creek floodplains to large river floodplains, a shift that may have provided a basis for the local development or acceptance of horticulture (Snyder and Gardner 1979). Technologically, the early Middle Woodland Period (ca. 500 B.C. - A.D. 200) in the area is characterized by a thick ware, known locally as Popes Creek, tempered with coarse sand or quartz and always impressed with nets. By late Middle Woodland times (ca. A.D. 200 - 900), a shift to a shell-tempered, often cord-marked or net-impressed ceramic, known locally as Mockley, had occurred. Lithic projectile points associated with the Middle Woodland Period include the shouldered, contracting stemmed Rossville, the lanceolate or stemmed Fox Creek or Selby Bay, the Piscataway, and the corner-notched Jack's Reef (Steponaitis 1980; Wanser 1982). As in the Early Woodland, these projectile point types must be used cautiously as chronological markers. As a final technological note, a marked increase rhyolite use is noted during the Middle Woodland, and is especially associated with the production of Selby Bay lithics (McNett and Gardner n.d.; Custer 1986).

Late Woodland

By the Late Woodland Period (ca. A.D. 900 - 1600), the development of horticulture probably began to achieve a significant role in the total subsistence system, though direct evidence is rare and scattered on the Coastal Plain. Maize, squash, and beans were probably the focus of initial agricultural efforts. The significance of an agriculturally-based subsistence is immense; no other factor is as crucial in the establishment and maintenance of permanent, year-round settlements. Sedentary villages were established near the fertile soils of riverine floodplains (Barber 1979). The presence of smaller, less permanent sites in a variety of settings attest to the fact that other resources were still being exploited.

Artifact sequences were more complex during the Late Woodland, due to several factors, including an increase in ceramic types, and the proliferation of variations of the triangular projectile point. The thin-bodied, sand- or quartz-tempered Potomac Creek ware (Stephenson and Ferguson 1963) and the shell-tempered Townsend series wares (Blaker 1950; Waselkov 1982) are among the most prominent ceramic types. Projectile points include the triangular Levanna and Madison types (Stephenson and Ferguson 1963; Ritchie 1971; Hranicky and Painter 1988).

As the Late Woodland Period progressed, the size and complexity of the villages and settlement systems in the Middle Atlantic increased, characterized by evidence of fortifications, specialized societal roles, development of inter-tribal alliances, growth of intertribal governmental authority and a higher degree of complexity in the observation of religious and ceremonial activities (Barber 1979; Snow 1978).

The east bank of the Anacostia River several kms west of the Kettering Park Site was the site of the village of Nacochtanke when Captain John Smith made his journey up the Potomac in 1608. The people of Nacochtanke, the "Necostins," traditionally have been associated with the Conoy, part of the Algonquin linguistic group, although there is little actual historic or linguistic evidence to support this assumption (Humphrey and Chambers 1977).

IV. HISTORIC LAND USE

Overview of Prince George's County

European exploration and settlement of southern Maryland was initiated by Captain John Smith's exploration of the Chesapeake Bay and Potomac River in 1608. His detailed notes of the Indian villages and abundant natural resources encouraged other explorers and traders to the region.

In 1632, Sir George Calvert was granted title to all of Maryland and the southern portion of Pennsylvania. The first colony to be established in Maryland was St. Mary's in 1634. Sir George was succeeded by his son Cecil, Second Lord of Baltimore. As Lord of the proprietary, Cecil had the right to grant land and collect an annual fee or "quitrent." Most of the early land grants were acquired by wealthy and influential men, merchants, and planters who intended to increase their wealth through the lucrative tobacco trade.

Cultivating tobacco for trade influenced settlement patterns and the social structure. First, vast tracts of land were necessary for growing the plant, which rapidly depletes the soil. These tracts were located along the shores of the Patuxent, Potomac, and St. Mary's Rivers, since water transportation afforded the only practical means of reaching trade centers. Second, the potential for great profits from the tobacco trade gave the first immigrants the opportunity for social mobility. For example, during the seventeenth century, most landowners seated their land with indentured servants brought from England. Once these servants completed their period of indenture, they could work as free men and save enough money to purchase their own land and hire their own servants (Wesler *et al.* 1981:79-82).

By the end of the seventeenth and early eighteenth century, however, the opportunity for social mobility had declined and the social structure had become increasingly stratified. By this time, the native European population (descendants of earlier immigrants) outnumbered the new immigrants. Also, an elite class had emerged from this native population, which continued to consolidate its economic and political dominance. The further decline in new immigrants and indentured servants was caused by the labor shortage in England after 1680. In order to meet the labor demands in the colony, slaves were imported from Africa and soon became an integral element in the tobacco economy. Slavery also contributed to the social stratification within white society because it led to a decline in the status and economic opportunities for free white laborers (Wesler *et al.* 1981:84).

The population of the region continued to increase, and the need for additional land caused settlement to expand into areas further inland: soon new counties were needed. In 1696, Prince George's County was established out of Calvert and Charles Counties. At this time, the majority of patented land continued to be situated along the riverfronts.

Tobacco remained the primary crop grown in Prince George's County through the eighteenth and into the nineteenth century. During the early eighteenth century, Maryland tobacco was considered to be inferior in quality and could only be traded with Scotland and Whitehaven, rather than the better markets in London. Unrest in the county during the 1730s has been explained by the low price of tobacco at that time (Wesler *et al.* 1981). In 1747, a tobacco inspection act was passed in order to monitor and improve the quality of Maryland tobacco. Two inspection warehouses were built, one at the mouth of Rock Creek on the Potomac, and the other at the head of the Eastern Branch of the Potomac (now known as the Anacostia) at Bladensburg. The town of Bladensburg had been established in 1742 at a site known originally as Garrison's Landing. The town served as Maryland's leading seaport in the export of tobacco for 50 years (Wright 1977). The project area is located to the northeast of Bladensburg, and it is probable that tobacco grown there was brought to that city for trade.

Several changes occurred in Prince George's County at the end of the eighteenth and early nineteenth century. In 1790, the site of the city of Washington was chosen, and a great portion of the land for the city was ceded by Prince George's County. In addition, the county's population declined as many of the poor white laborers began moving west where more land was available for purchase. The greatest improvement in the vicinity of the project area was the construction of the Washington Branch of the B & O Railroad in 1830. The railroad provided better transportation and encouraged the growth of new towns. Beltsville was established after the rail company purchased the right-of-way for the tracks through Trueman Belt's land.

On the whole, the early and mid-nineteenth century was a period of great stability for the county. Unlike other Maryland counties, crop diversification did not occur. Tobacco remained the most important crop and large plantations tended by slaves were dominant. As late as 1860, for example, there were 60 farms of more than 500 acres, and 58.8% of the county's population was black. During that year, 13½-million pounds of tobacco were produced, the greatest yield for any county in the United States (Wesler *et al.* 1981:141).

The Civil War dramatically altered the county's economic and social structure. Many of the freed slaves left the county for Washington or Baltimore causing a dramatic labor shortage. This shortage was felt by 1870 when only 3½-million pounds of tobacco were

produced (Wesler *et al.* 1981:141). Tenancy or sharecropping were the initial solutions for the labor shortage. However, the banks in the Washington and Baltimore provided loans for farmers, which encouraged crop diversification and a transition to smaller, independent farms. Instead of tobacco, farmers cultivated potatoes, fruit, and corn as well as some dairy products, which were marketed in the growing city of Washington. Distribution of these crops to more distant areas became possible by 1880 when refrigerated rail cars were introduced.

The growth of the city of Washington following the Civil War altered land use along the county's borders. The increasing population and improvements in transportation transformed these areas into suburban neighborhoods. The county's population grew rapidly, almost doubling between 1900 and 1930, and expanding at even greater rates through the 1960s.

V. OVERVIEW OF FIELD INVESTIGATIONS

Phase I Survey

In 1973, Tom Mayr first reported the Kettering Park vicinity as the location of archaeological materials (Lanham Quad File #2). In 1979, Terrence Epperson directed a Phase I survey of a 300-foot-wide corridor along the southern edge of Maryland 214. The goal of the Phase I survey was to locate and identify any archaeological sites in the project area. The Kettering Park Site (18PR174) was discovered during the survey.

The Phase I investigations at the Kettering Park Site (18PR174) were conducted on July 26 and 27, 1979. Terrence Epperson and Spencer Geasey (Dennis Curry assisted them on July 27th) made surface collections, and six test pits were excavated using both shovels and trowels. Five of the test pits excavated measured 61x61 cms and the sixth measured 46x46 cms. All of the test pits were excavated to a depth of between 46 and 61 cms and the excavated materials were screened through a 1/4-inch mesh. The majority of the cultural material appeared to come from the layer between the dark humus layer on top and the lower, more reddish and sandy layer. Epperson (1979:6) believed that the depth of the units penetrated well into sterile soil.

Epperson's (1979:7-8) artifact inventories from both surface collections and the test pits included the following ceramics: 1 Moyaone sherd, 16 Pope's Creek sherds, and 4 Accokeek sherds. The lithic finds were two quartz Potomac (or Madison) triangular points, one Vernon type expanding stemmed point, three quartz biface fragments, one chert biface fragment, quartz debitage, quartzite debitage, chert debitage, rhyolite debitage, and a possible hammerstone.

Epperson's (1979:8) attributions of these artifacts led him to believe that the Kettering Park Site was primarily a Late Woodland (ca. 900-1600 A.D.) site that was contemporaneous with the Potomac Creek component of the Accokeek Creek site. He believed that the Kettering Park Site differed from the Accokeek Creek site because it was not a permanent village, but rather a "specialized, short-term occupation" site whose the primary function was the "reduction of lithic materials for the manufacturing of quartz tools, especially quartz projectile points" (Epperson 1979:8).

The lithic materials recovered during the Phase I investigations were later re-analyzed by Carol Ebright, who reclassified the triangular quartz points as Levanna types diagnostic of the early part of the Late Woodland Period. The ceramics from the Phase I excavations were re-analyzed by Katherine Dinnel, who found that the majority of the sherds could be typed as

Accokeek, which date to the Early Woodland Period. This information, in combination with the Late Archaic/Early Woodland diagnostic Vernon point, led Kavanagh (n.d.) to conclude that the site was periodically re-occupied from the Late Archaic through the Late Woodland Periods. More complete enumeration of the artifacts will be discussed in following chapters.

Phase II Testing

At the conclusion of the Phase I survey, Phase II evaluative testing was proposed. Testing was considered necessary at the Kettering Park Site because of impending construction plans and because of the site's potential eligibility for inclusion in the National Register of Historic Places (Epperson 1979:8). Maureen Kavanagh, M.A., and Silas Hurry, B.A., carried out Phase II testing from April 12 to May 24, 1983. In accordance with federal regulations, the directors of the field project had adequate training in archaeology, Kavanagh with 6 years of experience in the Middle Atlantic, and Hurry with 9 years of field experience. The fieldwork program was designed to determine both the horizontal and vertical limits of the site, site integrity, the number of occupations, and to evaluate the site's eligibility for listing on the National Register of Historic Places.

During the first stage of testing, 166 shovel test pits (STPs) were excavated in two major blocks across the site. The STPs were placed along transects that were 5 m apart, at intervals of 5 m along each transect. Soil from the excavations was screened through 1/4-inch mesh hardware cloth. All cultural materials were retained and bagged according to provenience. The stratigraphy was recorded during the excavation of each unit.

The spatial dimensions of the Kettering Park Site were determined by the terrain and by plotting the material results from shovel tests. The site was confined to a very specific topographic zone, at the 21.5-22 m contour, at the confluence of the paleocourses of the Northeastern and Western Branches of the Patuxent (Appendix B: Figure 1). Defining the northern site boundary was hampered by the existing roadbed of Maryland 214 and a sewer line north of and parallel to the road (Figure 3). However, the sloping surface that rises immediately behind the sewer line probably marks the northernmost boundary. The site was once farmed (probably in the nineteenth century), then reforested, and more recently cleared for maintaining a park and picnic area. During the investigations, an open stand of trees, mostly beech, was present, containing individual specimens measuring between 25-30 cms in diameter. A gravel

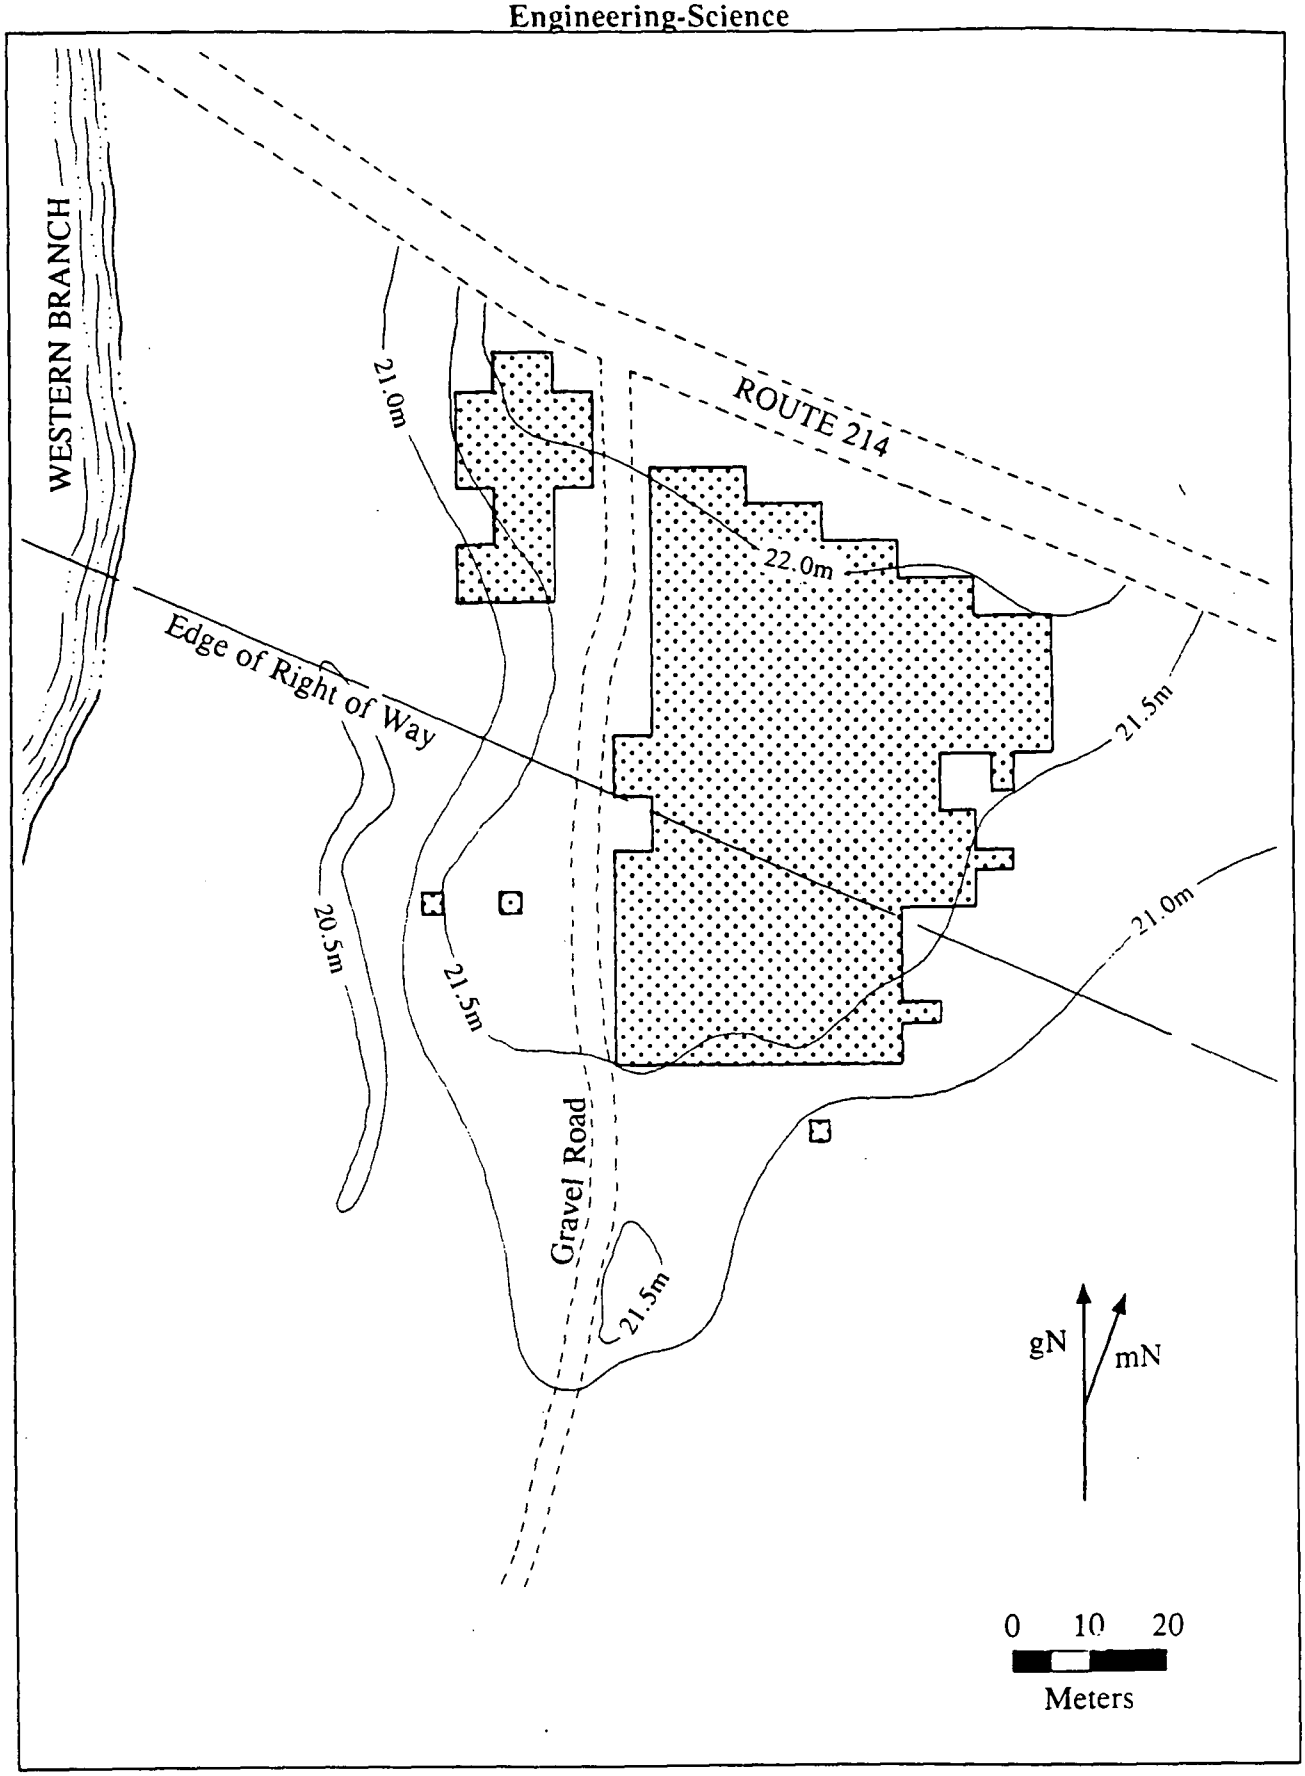

Kettering Park Site

Figure 3
Areas Investigated During
Phase II Testing and Phase III
Data Recovery Excavations

road ran north to south through the site.

The 11 test units were selectively placed, based on both the artifact distribution and stratigraphic information provided by the STPs (Figure 4). Ten of the test units measured one-meter square and one unit measured 1.5-meters square. The STPs and the 11 test excavation units were excavated by natural layers. The excavation units were subdivided into arbitrary 10-cm levels where appropriate. Areas previously disturbed were eliminated from the grid.

Artifacts

During Phase II testing, 22 temporally diagnostic projectile point fragments were recovered, ranging in age from the Early Archaic to the Late Woodland. Seventeen of the points were given specific type designations. These include three Normanskill, one Lamoka-like, two Bare Island, one Orient Fishtail, one Drybrook Fishtail, one Vernon, three Piscataway, and five Levanna. There were also one untyped Early Archaic, three untyped Late Archaic, and one untyped Late Woodland triangle. Ceramics were recovered throughout the site, but the highest concentrations were recovered from the southern and central sectors. Temporally diagnostic types were recovered from all areas of the site, most of the sherds representing Early Woodland and Late Woodland types. The Late Woodland Potomac Creek, Townsend, and Moyaone wares appeared to be concentrated in the central and southern parts of the site. Artifacts recovered during the Phase II testing also included 16 bifaces and almost 3,000 fragments of debitage. More complete enumeration and description of the artifacts is found in the following chapters.

Pedology and Stratigraphy

G. Mathias Kondolf conducted a pedological and geomorphological study at the Kettering Park Site (Appendix B). The study elucidated much about the site's depositional context and was useful for establishing a general stratigraphy. As Kondolf (1983) notes in Appendix B, the Kettering Park Site is underlain by Quaternary fluvial sands and gravels of the Wicomico Formation (Cooke and Cloos 1951). The surrounding Coastal Plain uplands are primarily underlain by Tertiary Aguia greensand, and by less extensive outcrops of the undifferentiated Tertiary Chesapeake group (Cooke and Cloos 1951). The soil at the Kettering Park Site is mapped as Bibb silt-loam (Kirby *et al.* 1967). The site soils are medium-sized sandy loams and loamy sands, with a gritty feeling (Kondolf 1983).

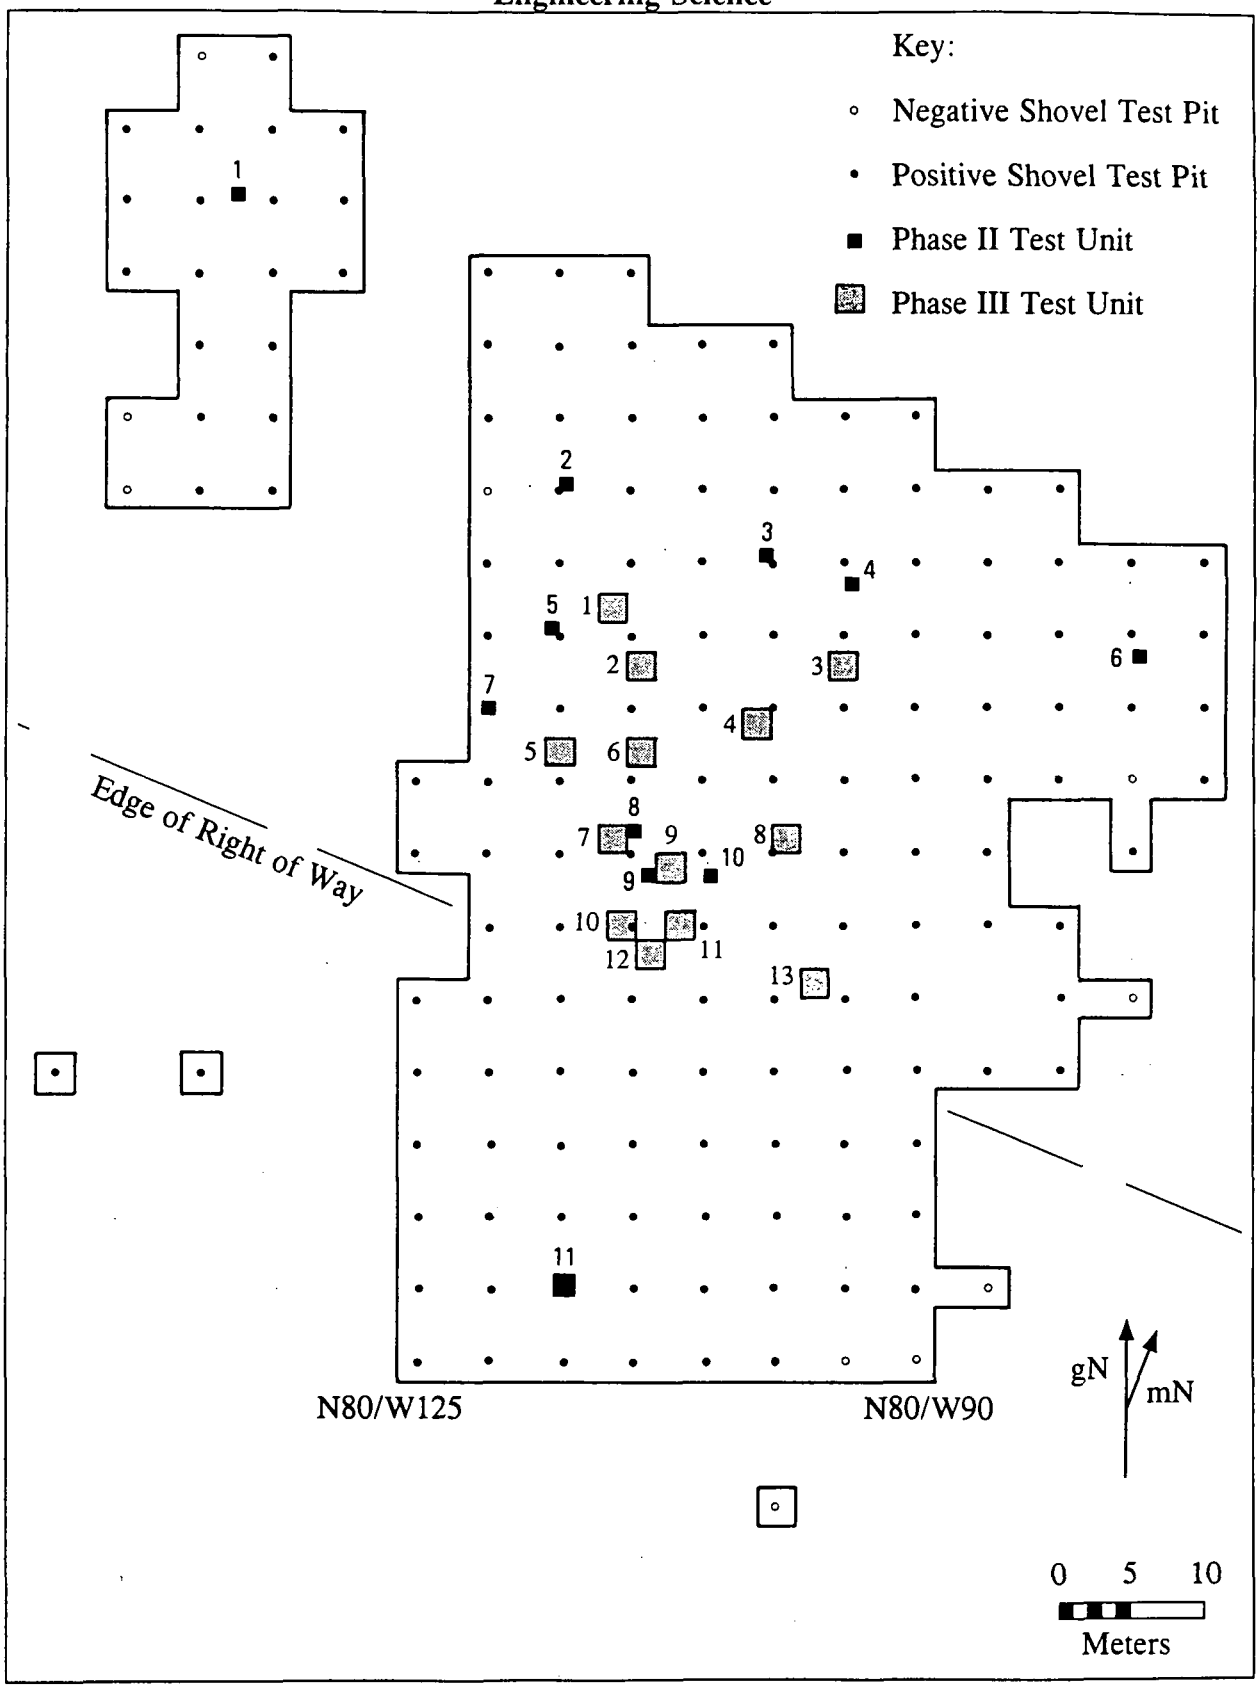

Kettering Park Site

Figure 4
Site Plan with STPs, Test Units, and Excavated Units Located

Kondolf established a site-wide stratigraphy from auger holes, soil pits, and shovel test pits. Soils were described in the field for color, texture, and consistency. Pronounced thinning and thickening of the A horizon was apparent, probably due to several factors, including sheetwash, sediment trapping, plowing, and disturbance by modern vehicles. The A horizon consisted of two components, an uppermost A1 and an underlying A2. The A1 horizon was marked by a weak-moderate, subangular, and blocky structure. The A2 horizon was characterized as a moderate platey to subangular blocky, very friable, nonsticky, non-plastic to slightly plastic structure, with mottles.

Underlying the A horizon was the B horizon. The excavated units contained developed cambic B and underlying argillic B horizons. The base of the B horizon was marked by the parent material, identified by a change in the soil texture. The parent material primarily consisted of well-sorted fine and medium sand, with infrequent occurrences of silty sand, sandy gravel, and gravelly sand. Within the argillic B horizons the colors were quite red, but the color varied greatly between the units. Thin clay skins were occasionally visible in the B horizon. Below 80 cms in depth mottles were common, indicating that the site was poorly drained. Between 80 and 100 cms in depth an abundance of iron was present in the form of iron oxide-cemented concretions. The available iron was formed by the weathering of glauconite derived from the greensands of the uplands deposited at the site. Development of an argillic B horizon was considered important since stability was indicated. The combination of red color and argillic B development suggested formation ca. 10,000 $\pm$ 4,000 years ago.

During Phase II testing, natural stratigraphy was recorded in profiles. The characteristic soil profile consisted of four main natural layers, designated as Strata A-D. A typical soil profile is illustrated in Figure 5. In most units, Stratum A was 3 to 14 cms in thickness, and was composed of a dark brown (7.5YR 3/2 to 10YR 3/3) silt loam. Stratum B was between 5 and 21 cms in depth, with an average at 10.5 cms. Stratum B was a dark brown (7.5YR 3/4, 10YR 3/3) silt loam mottled with a strong brown (7.5YR 4/6) silt loam. Stratum C was a strong brown (7.5YR 5/6) sandy loam or sandy silt loam. Stratum C varied in thickness between 17 and 35 cms, averaging 25 cms. Stratum D was a strong brown (7.5YR 4/6 to 5/6) sandy silt loam.

An attempt was made to correlate the natural stratigraphy with the soil classification scheme (Figure 5). Stratum A was interpreted to be part of the A1 horizon, consisting of a humus of recent age. The late age of Stratum A was indicated by the presence of late historical artifacts in this uppermost layer. Stratum B was also interpreted to be part of the A1 horizon,

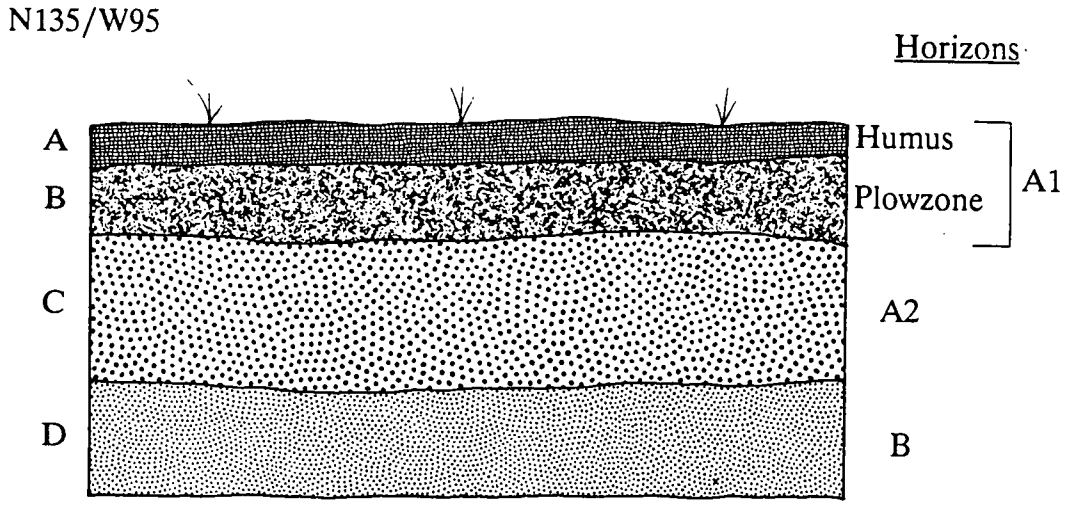

Key:

A: 7.5YR 3/2 dark brown silt loam
B: 7.5YR 3/4 dark brown silt loam mottled with 7.5YR 4/6 strong brown silt loam
C: 7.5YR 4/6 strong brown sandy silt loam
D: 7.5YR 5/6 strong brown sandy silt loam



Kettering Park Site

Figure 5
Typical Soil Profile:
N135/W95
North Profile

consisting of a mixture of plowzone and intrusive alluvial and sheetwash disturbances, ranging from finer to coarser texture with depth. The high density of artifacts recovered from the A1 horizon ranged in date from the Late Archaic (2,500 B.C. to 1,000 B.C.) to the late twentieth-century. Stratum C generally correlates with the A2 horizon. Prehistoric artifacts were encountered throughout Stratum C or the A2 horizon, with the greatest density occurring at or near the top. Only one of the 166 STPs contained historical material in level 2 context, suggesting a minimum of mixing below the plowzone. However, several units had biological disturbances that included some combination of gullies, roots, root casts, and rodent burrows. Stratum D was roughly correlated with the B horizon. The B horizon consisted of culturally sterile subsoil. The B horizon was encountered at a mean depth of 60 cms, but the total range varied from 42 to 100 cms below the surface. In approximately 30 of the STPs, groundwater was encountered before subsoil was reached, at a mean depth of 40-50 cms, within a range of 22 to 73 cms in depth. No cultural features were revealed in the test units. However, the test unit stratigraphy appeared to generally indicate the existence of relatively undisturbed artifact-bearing deposits below the plowzone.

Phase II Results

The goals of the Phase II testing program were achieved. The Kettering Park Site limitations were defined by a series of systematic shovel tests and its setting at the confluence of paleostream courses. While the northern boundary of the site was defined by modern features, the higher topographic relief just north of Maryland 214 was probably the horizontal limit of the site. The vertical limitation of the site was clearly established by the excavation of shovel tests and test units. Strata A and B were considered to be part of the A1 horizon, representing a mix of plowzone and intrusive alluvial and sheetwash deposits. Stratum C, on the other hand, appeared to be a relatively intact A2 horizon. Stratum D was underling the A2 horizon and was clearly identifiable as an ancient B-horizon. The uppermost A1 horizon contained a mix of historic and prehistoric artifacts, whereas the A2 horizon appeared to represent higher integrity deposits with mostly Late Archaic and Early Woodland material. Of the temporally diagnostic materials from the A1 and A2 horizons, the Late Archaic, Early Woodland, and Late Woodland Periods appeared to be most abundant. The density of ceramics and chipped stone clearly indicated that data could be obtained about material economies. The density and diversity of Early Woodland ceramics was of particular interest, and was considered to be useful for examining ceramic traits. While no features were identified, the discovery of artifacts in the A2 horizon was considered important, useful for addressing issues relating to prehistoric settlement and technology.

Phase III Data Recovery

Research Design

Upon completion of the Phase II investigations, more intensive excavations were recommended because the data analysis determined that subplowzone deposits with mostly Late Archaic and Early Woodland materials were present at the site. The Maryland State Highway Administration and the Maryland Historical Trust agreed that the Kettering Park Site was eligible for listing on the National Register of Historic Places under Criterion D, the site having the ability to yield information to prehistory. Although Maureen Kavanagh prepared a draft report of the Phase II work, it was not completed due to the imminence of Phase III excavations. General research goals for the Phase III field work were developed to address prehistoric settlement and technology themes of the Maryland Comprehensive Historic Preservation Plan. More specifically, the goals of the Phase III research were 1) to obtain a representative collection of artifacts associated with the Early Woodland Accokeek occupation of the site; 2) to provide specific statement concerning activities at the site; 3) to provide detail on the extent, direction, and nature of lithic exchange systems operating in the Early Woodland period relative to earlier and later periods; and 4) to formally define three varieties of Accokeek ceramics.

Phase III Excavation

The Phase III excavation was conducted in the same area as the Phase II Testing, at the 21.5-22 m contour (Figures 3 and 4). The primary purpose of the Phase III excavations was to recover a representative sample of Early Woodland artifacts from the subplowzone A2 horizon. The portion of the site lying within the construction area that had the best preservation of this stratigraphic zone was delineated. Since no features were found, and since the purpose of the Phase III was to obtain a representative sample of Early Woodland material, a random sampling strategy was deemed most appropriate. A 10% sampling level was selected, based upon tests of sampling percentages at St. Mary's City which determined that a 7.5% sample was sufficient to characterize a site in terms of both site activities and artifact assemblage (Henry Miller, pers. comm. with Maureen Kavanagh, 1985). Two-meter square units were chosen to maximize coverage, thereby increasing the reliability of the random sample (Redman 1975:151). The selected excavation units consisted of a 10% non-aligned, stratified, random sample. If a selected unit contained a standing tree, another was randomly chosen as a replacement. Avoiding trees in the southernmost zone was necessary because the site was located in a public park.

The humus and the plowzone/wash layers were excavated by removing (by shovel) and screening of the northwest quadrant of each unit. The remaining three quadrants were removed without screening. Grab samples of both historical and prehistoric artifacts were collected from the excavated material. The units were divided into four one-meter square quadrants in order to maintain greater control of the provenience of the recovered materials. The 13 units were excavated (by trowel) in natural layers that were divided into arbitrary 10-cm levels where their depth permitted.

Universal Stratigraphy

To establish a universal stratigraphy for the phased archaeological investigations, and a proper analytical framework for artifact studies, the strata of the Phase II test units were correlated with the strata of the Phase III excavated units. The Phase II test units were excavated by arbitrary 10-cm levels, and natural stratigraphy was recorded in the profiles. The Phase III excavated units were dug in natural layers. In each excavation, subplowzone deposits were identified, and were grouped as belonging to the A2 horizon. Table 1 represents a universal level designation for the A2 horizon. The table shows both the absolute elevation above sea level for the top of the A2 horizon, and the levels that constitute this stratum for each site unit.

Table 1 demonstrates a correlation between changes in the slope of the site with elevation changes in the top of the A2 horizon for both Phase II test units and the Phase III excavated units. This correlation allowed the stratigraphy and subsequent mapping of the A2 horizon artifacts across the site to be standardized.

Table 1: Correlations Between Elevations and Levels for Top of A2 Horizon

Phase II Unit Number	Unit Datum Elevation*	Top of A2 Horizon	A2 Horizon Levels
1 (N162/W138)	21.99	21.67	4,5,6
2 (N142/W115)	21.85	21.69	3,4,5
3 (N137/W101)	21.99	21.69	4,5,6
4 (N135/W95)	21.86	21.71	3,4
5 (N132/W116)	21.64	21.50	3,4
6 (N130/W75)	21.64	21.50	3,4
7 (N126.5/W120.5)	21.72	21.49	3,4
8 (N118/W110)	21.70	21.44-21.50	3,4,5,6
9 (N115/W109)	21.69	21.56	3,4,5
10 (N115/W105)	21.65	21.55	3,4,5
11 (N87/W115)	21.67	21.54	3,4
Phase III Unit Number	**Unit Datum Elevation**	**Top of A2 Horizon**	**A2 Horizon Levels**
1 (N134/W112)	21.95	21.78	3
2 (N130/W110)	21.88	21.64-21.73	3,4
3 (N130/W96)	21.98	21.74	3
4 (N126/W102)	21.93	21.69	3
5 (N124/W116)	21.80	21.50	3
6 (N124/W110)	21.74	21.49	3
7 (N118/W112)	21.69	21.45	3
8 (N118/W100)	21.93	21.68-21.72	3,4
9 (N116/W108)	21.72	21.55	3
10 (N112/W112)	21.79	21.50-21.58	3
11 (N112/W108)	21.67	21.54	3,4
12 (N110/W110)	21.69	21.51	3,4,5
13 (N108/W98)	21.83	21.64	3

* Elevations in Meters Above Sea Level

VI. LABORATORY METHODS

Artifact Processing

All artifacts recovered during the three phases of research at the Kettering Park Site were transported to the Maryland Geological Survey archaeological laboratory for processing. The lithic artifacts selected for special analysis were curated in an unwashed condition so as not to destroy any possible residues. The remaining artifacts were cleaned. All artifacts were organized by provenience and a unique lot number for each provenience was assigned. Tools, cores, and sherds were assigned unique consecutive numbers within each provenience; this number was appended to the lot number as a decimal. The provenience data were computerized using dBase III+ software.

Artifact Cataloguing

All artifacts recovered from the Kettering Park Site were re-catalogued after 1988 using a technologically based cataloguing system developed in 1987 by Carol Ebright. The artifacts were catalogued by lot and according to deliberately general classification categories. The broadly defined categories were designed to maximize the ability to extract sets of related artifacts for further analysis as a group. More complete recording of relevant attributes for particular classes of artifacts was accomplished during subsequent analysis. Only fire-cracked rock was weighed, counted, and discarded; the remaining prehistoric artifacts were curated.

Technological classification was utilized as a means of better understanding the lithic and ceramic technologies used at the site. An original goal of the Phase III research was to formally define three varieties of Accokeek ceramics. The cataloging system was designed to record the compositional attributes that would define three distinct wares. The technological analysis of the lithic artifacts was based on a system that distinguished between ground stone tools, tools whose morphology was created primarily through use, and those produced by bifacial, unifacial, and bipolar flaked stone technologies.

Debitage Analysis

Debitage includes flakes, cores, and chunks, all waste products of the flaked stone tool manufacturing process in either bifacial, unifacial, or bipolar reduction trajectories. The recovered debitage was catalogued using Ebright's (1985, 1992) criteria. The debitage categories used in cataloguing the artifacts are defined below.

Flake - A flake is defined as any piece removed from a core or tool. Any one of the following criteria can be used to define a flake: a striking platform, bulb of percussion or sheared Hertzian cone, conchoidal fracture ripples, a hinge termination, or the presence of flake scars on the dorsal surface. Large, heavy flakes with dorsal flake scars indicating that the artifact was probably a large part of a core are still considered flakes unless there is evidence that the flake itself was used as a core after it was produced from the parent material. The following flake types are produced in bifacial and unifacial reduction technologies.

Decortication Flake - Any flake containing cortex is included in this category except those with bipolar characteristics. "Cortex" includes bedding plane surfaces as well as nodular rinds. Platforms are often flat and triangular in shape and have often been prepared by removal of small flakes near the dorsal platform surface to isolate the platform and even the sides.

Primary Flake - Primary flakes are characterized by a single or double ridge on the dorsal surface produced by the removal of previous flakes. The horizontal cross-section is usually triangular. Platforms have often been modified in order to isolate them and may be either flat or faceted. Grinding is often present. The bulb of percussion is frequently pronounced, often giving the ventral flake surface of short flakes an overall convex shape. Longer flakes are often twisted and curved in longitudinal cross-section, indicative of attempts to remove ridges and angularities.

Secondary Flake - Secondary flakes are often referred to as biface thinning flakes. These are characterized by complex flake scars on the dorsal surfaces, a thin lenticular horizontal cross-section, and a thin, slightly curved or flat longitudinal cross-section, and a thin, slightly curved or flat longitudinal cross-section. Striking platforms have usually been carefully prepared, are lenticular in shape, faceted, and ground.

Tertiary Flake - Tertiary flakes are small, thin flakes with most of the characteristics of secondary flakes. Generally about 1/4-inch wide and 1/2-inch long or less, tertiary flakes represent the final stages of thinning and shaping a tool. Those flakes produced by percussion tend to be flat in longitudinal cross-section; those produced by pressure tend to be slightly twisted and show a greater curvature. Platforms are nearly always lenticular and ground, and dorsal flake surfaces show a complex pattern and flake scars.

Multifacial Flake Core - A core characterized by removal of flakes of uncontrolled shape for expedient use, or modification in a bifacial or unifacial trajectory. Multifacial flake cores can have a single platform area, bifacial flake removals, or randomly placed platforms related to the morphology of the raw material.

Bipolar manufacturing technologies produce the following debitage types:

Bipolar Flake - Bipolar flakes, with and without cortex, are characterized by a Hertzian cone rather than a bulb of percussion. This appears as a flat surface, often with visible compression rings. The platform is usually crushed and concave, as is the end opposite the platform. Dorsal flake scars are often parallel, linear, and frequently do not emanate from the striking platform, as is characteristic of non-bipolar flakes.

Bipolar Core - A core characterized by one or more paired, crushed platforms exhibited sheared Hertzian cones. Platform pairs may be oriented in several directions, sometimes with one point or area serving as the point of impact or anvil contact for several opposing platforms. Bipolar cores range from split cobbles that serve as biface blanks, to randomly reduced cores from which flake blanks were produced, to piece esquilles which may represent either exhausted bipolar cores or tools.

Debitage that cannot be related to a particular technology includes:

Chunk - A chunk is characterized by freshly broken surfaces, but lacks clear negative flake scars to confirm that it was a produced by human activity. Chunks are usually produced in the earliest stages of tool manufacture, and often occur as a result of internal flaws in the raw material.

Microflake - A flake smaller than ¼ square inch that is broken to the extent that its type cannot be determined. This category was used only with debitage recovered from flotation.

Unclassifiable Flake Fragment - A flake broken to the extent that its type cannot be determined. This classification includes debitage recovered with 1/4-inch screens.

Unclassifiable Core Fragment - A core broken to the extent that its type cannot be determined. However, all core fragments have evidence of at least one negative flake scar.

Core Analysis

All cores were individually examined, and metric attributes recorded include weight, maximum length, and maximum thickness. Platform type for each type of core, degree of exhaustion, material quality, and cortex presence and type were also evaluated.

Uniface Tool Analysis

Unifacial tool analysis included the determination of one or more working edge angles; the combined length of the working edge; and length, width, and thickness measurements. Formal unifacial tools and retouched/utilized debitage are considered part of the unifaces, even in some cases where retouch was bifacial.

Biface Analysis

All non-diagnostic bifaces were individually examined. Length, width, and thickness measurements were taken, and the width/thickness ratios were calculated to determine the stage of manufacture. Biface stage definitions were adapted from Callahan's (1979) replicative studies.

Bifacial Tool Manufacturing Errors

An aspect of lithic biface analysis involves the ability to distinguish failed attempts at tool manufacture from those broken postdepositionally. Analysis of breakage patterns provides a means of assessing these factors, and can yield clues to the manufacturing techniques employed

as well as the stages in which tools were manufactured, used, and recycled. The definitions of these terms are provided below and were extracted from Kavanagh and Ebright (1988) and Ebright (1992).

Manufacturing Errors

Thinning Failure - Thinning failure manifests itself as a surface irregularity, usually as a hump on one face, surrounded by flake scars terminating in hinge fractures. This error does not necessarily result in breakage although attempting removal of humps is a major cause of perverse fracture described below. Hinge fractures, in these instances, may be caused by flaws in the material, and contribute to the decision to abandon the artifact. While thinning failure may result in an unusable projectile point, it does not necessarily prevent the use of the artifact in another, more general, function.

Material Flaw - Material flaws consist of a variety of imperfections in a lithic material including bedding planes, fossils, crystal pockets, and other inclusions. Major flaws usually cause fractures during the manufacturing process as a result of vibrations created during knapping. This is one of the primary ways that chunks and shatter are produced. Artifacts with minor flaws may survive the manufacturing process, but the flaw may later contribute to tool failure during use.

End Shock - End shock is a fracture pattern that occurs late in the manufacturing process after a biface has been partly thinned. This fracture occurs at the point other than where the biface is struck by the percussor, and is the result of vibrations exceeding the tensile strength of the material. End shock fractures usually occur perpendicular to the long axis of the biface, usually at the tip end, and have a distinct "S" shape on the fracture surface when viewed from face to face.

Perverse Fracture - Perverse fractures are diagonal transverse breaks that occur during biface thinning as a result of excessive force and/or misplaced platforms or billet blows. Fracture surfaces are twisted when viewed from edge to edge. Perverse fractures are frequently associated with thinning failures, especially those centered on biface edges. Many also occur in conjunction with material flaws.

Reverse Hinge Fracture - This fracture type is most often associated with attempted end thinning during manufacture. Bifaces fractured in this manner exhibit a rounded break on one half where the thinning flake removal attempt curved through the body of the biface. The other half retains the negative concavity and often a "tail" containing the original striking platform.

Use-Related Errors

Impact Fracture - Impact fractures are probably the most commonly recognized use-related breakage pattern. They are characterized by one or multiple flake scars emanating downward from the tip, often accompanied by removal of blade margins around the tip. Tips are occasionally pulverized resulting in a horizontal or sightly concave break with a battered edge similar to that seen on a bipolar core. Impact-related flake scars often exhibit sheared Hertzian cones.

Haft Snap - Haft snaps result from the application of excessive force to the blade of a biface, in a face to face or edge-to-edge direction. The consequent fracture occurs at the point of least support - the juncture of the haft element and the blade. This fracture pattern is most likely to occur in uses other than as a projectile.

Margin Spall - Margin spalls occur as a result of the tendency of force to follow existing ridges on the topography of the artifact. The most acute ridges on bifacial artifacts are the edges, and margin spalls occurring by themselves are usually an indicator of the use of the artifacts as a knife, and occur when the edge encounters a hard substance such as bone. This fracture type also co-occurs frequently with impact fractures.

Twist Fracture - Twist fractures most frequently occur on the blade portion of biface and are characterized by large flake removals on opposing sides and faces of the resulting fragment. They result from artifact use in a non-projectile point function.

Thermal Errors

Crenated Fracture - Crenated fractures exhibit a distinctive curved and/or wavy fracture surface and result from the application of excessive heat or too rapid heating or cooling. This error usually occurs during intentional heat treatment of bifaces.

Crazed, Spalled, or Exploded - These errors are evidence of thermal damage that may have originated from either errors during intentional heat treatment or [exposure to] postdepositional fire. Crazing consists of irregular internal fracturing that effectively prevents further modification. Explosion and spalling result in physical fracturing, exposing large areas of crazed surfaces. Pot lid fractures are circular spalls that pop off chert surfaces during the initial stages of heat damage. Pot lid fracturing does not necessarily impede further flintknapping if it occurs on a small scale. In general, the above listed thermal fractures are more catastrophic in nature than crenated fracturing, and are less reliable indicators of intentional aboriginal heat treatment of lithic materials.

Bipolar Fractures

Bipolar fractures are defined by the presence of two crushed platform areas and the presence of a flat and sheared cone surface rather than positive or negative bulbs of percussion on interior surfaces. Bipolaring on bifacial artifacts appears to occur most often on already broken biface fragments and frequently occurs in a side-to-side direction. Occasionally bipolaring occurs in an end-to-end direction on apparently complete artifacts. In the former case, enough bifacial attributes are retained to distinguish these from bipolar cores or pieces esquillees. In the latter, opposing platforms distinguish bipolared implements from impact-fractures artifacts. The reasons for creating bipolared biface fragments are not clear.

Diagnostic Bifacial Artifact Types

Identifying diagnostic artifacts by type attempts to isolate and determine the cultural and temporal affiliation of particular components. Projectile point classification was undertaken using original published type descriptions and comparable points from documented contexts. Both metric and descriptive attributes for projectile points were taken.

Ground Stone and Use-Modified Stone Tool Analysis

Standard length, width, and thickness measurements were taken on all artifacts in these categories. In certain cases, specific working surface types and locations of wear were also identified.

Fire-Cracked Rock

Fire-cracked rock were counted and weighed to provide an estimate of mass for mapping and analytical purposes.

Lithic Raw Materials

The great majority of the lithic artifacts were made from quartz, quartzite, rhyolite, and chert. Quartz was broadly defined to include translucent or opaque material of massive character, or which exhibited heterogeneous surface textures. Quartzite was narrowly defined to include materials that were opaque and exhibited consistent, uniform granulation. Quartz and quartzite were locally available from the immediate vicinity of the site, in secondary deposits. Rhyolite was a distinct material but exhibited various gradations. Rhyolite deposits are located in the Blue Ridge deposits in Maryland and Pennsylvania. Cherts were a distinct material, but there was variation in color and structural characteristics. Cherts could be derived from primary sources or secondary gravels.

Ceramic Analysis

The attributes used for the recording of these artifacts included temper, surface treatment, and vessel portion when apparent. Vessel thickness, paste texture, and cord-twist direction were also recorded. The surface treatment that produced as a result of the manufacturing technique was differentiated from those that were applied as decoration.

Curation

All artifacts, field records, and photographs from the Kettering Park Site will be curated at the Maryland Historical Trust facilities.

VII. ARTIFACT ANALYSES

Table 2 provides the count and frequency of all artifact classes recovered during the Phase I, II, and III investigations at the Kettering Park Site. Appendices C and D represent the artifact inventory codes and a full artifact inventory. A total of 6,662 prehistoric artifacts was recovered from the three phases of archaeological investigation at the Kettering Park Site. The artifacts consisted of 1,048 ceramics, 826 fire-cracked rocks, and 4,788 stone artifacts. In the following section, the ceramic and stone artifacts are discussed by morphological types, providing detailed descriptive information for analytical purposes.

Ceramics

A total of 1,048 ceramic sherds was recovered during the survey, testing, and excavation of the Kettering Park Site. A list of ceramic attributes and measurements appears in Appendix E. Ceramics accounted for 15.7% of all prehistoric artifacts recovered. The sample discussed here was restricted to 818 sherds because fragments that measured under 1 sq cm were identified by paste and surface treatment and were excluded from further analysis. Where possible, sherds were cross mended, and in one case 96 sherds were partially reassembled into a single Accokeek Creek micaceous sand-tempered vessel[1]. In the original analysis, mended pieces were counted as a single piece, and as a result the total sherd count, less the minute fragments, was 723. However, since this single micaceous sand-tempered vessel was extraordinary, counting the sherds as "one" cross-mended piece skewed the overall percentages. As a result, it was decided to include the 96 individual sherds in the overall count of 818.

In total, 83.7[2]% of the ceramics studied were dated to the Early Woodland Period. The types present included Marcey Creek, Selden Island, and three varieties of Accokeek ware. All of the ceramic types and the method of their classification are discussed in detail below. The only Middle Woodland ceramic type represented was Mockley ware; this type accounted for

---

[1]Most of the sherds had very eroded edges. The conjoining of eroded edged pieces to form a partial vessel did not provide information adequate to determine vessel form or dimensions.

[2]Using the original sample number of 723, the Early Woodland ceramics comprise only 70.5 percent of the assemblage; the Middle Woodland sample accounted for 10.5 percent; and the Late Woodland Period percentage remained unchanged.

Table 2: Prehistoric Artifact Type Frequencies by Phase

Artifact Type	Count			Frequency
	Phase I	Phase II	Phase III	
Ceramics	24	448	576	15.7%
Fire-Cracked Rocks	10	333	483	12.4%
Decortication Flakes	5	286	292	8.8%
Primary Flakes	2	236	237	7.1%
Secondary Flakes	6	734	520	18.9%
Tertiary Flakes	0	224	164	5.8%
Bipolar Flakes with Cortex	5	136	30	2.6%
Bipolar Flakes without Cortex	7	68	41	1.7%
Unclassifiable Flake Fragments	0	102	54	2.3%
Lithic Chunks	2	1,121	121	18.7%
Multifacial Flake Cores	0	6	7	.2%
Micro Flakes (From Flotation)	0	0	118	1.8%
Bipolar Cores	0	56	40	1.5%
Unclassifiable Core Fragments	1	7	13	.3%
Projectile Points and Fragments	4	32	23	.9%
Stage 1 Bifaces	1	4	5	.1%
Stage 2 Bifaces	1	2	3	.1%
Stage 3 Bifaces	0	1	0	.1%
Unclassifiable Biface Fragments	1	9	17	.4%
Unifacial Tools	2	19	13	.5%
Ground Stone and Use-Modified Stone Tools	1	5	4	.1%
Total	**72**	**3,829**	**2,761**	**100%**

1.5% of the ceramics recovered (11 sherds). It should be noted that 65 "unidentified shell-tempered" fragments were recovered, but Dinnel and Kavanagh (1990) felt that these could either be Mockley (a Middle Woodland diagnostic) or Townsend (a Late Woodland diagnostic) wares. These fragments have been classified as "unidentified" in the ceramic classification summaries so as not to skew the sample.

Five Late Woodland types were recovered during the three phases of investigations at the Kettering Park Site: Townsend, Moyaone, Potomac Creek, Shepard, and Riggins wares. The sample also included 21 sherds that dated to the Late Woodland Period (the attribution was based on the density of the paste, the hardness of the fire, and the thinness of the vessel walls) but could not be classified according to type. In total, 12.6% of the ceramics recovered dated to the Late Woodland Period.

Of the ceramics which could be classified to a specific type (n=460), 78% were Early Woodland, 19.6% were Late Woodland, and 2.3% were Middle Woodland (Figure 6).

Figure 6: Ceramic Frequency by Period

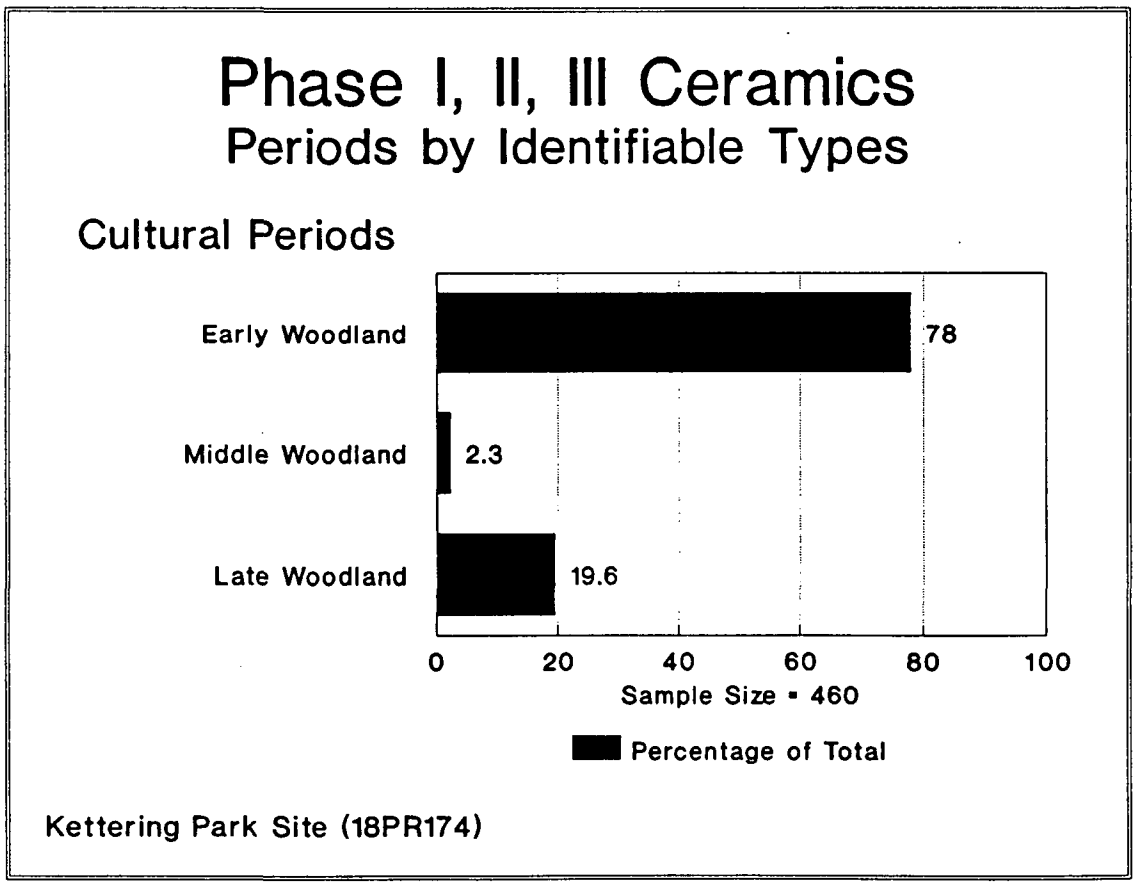

Early Woodland Ceramics

A total of six Early Woodland ceramic types was identified (Figure 7). Most of the ceramics were one of three varieties of Accokeek types, with several sherds of Marcey Creek and Selden Island types. Although 151 sherds were unidentifiable as to type, they could be assigned an Early Woodland date.

Figure 7: Early Woodland Ceramics by Types

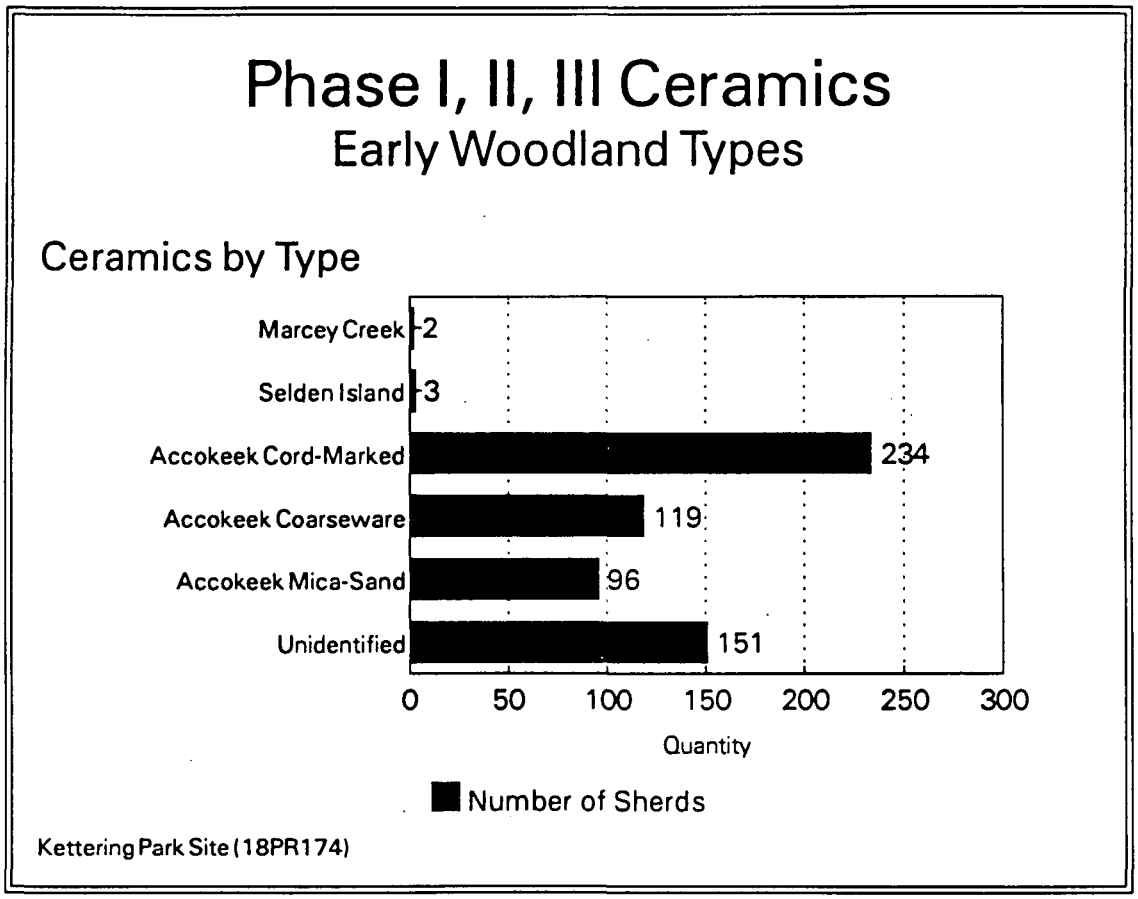

Marcey Creek Ware: Two body sherds of Marcey Creek were recovered; both of these appear to be from near the base of a thick vessel that was made by using the slab-construction technique. The paste of this vessel type is friable, chunky, and has a soapy texture. The non-plastic inclusions are crushed steatite, and medium grained micaceous sand. The thickness of the vessel(s) represented in this sample ranged from between 11.4 and 14 mm. The two sherds that were recovered were undecorated and had a smoothed exterior with an uneven wavy appearance (Dinnel and Kavanagh 1990; Manson 1948; Egloff and Potter 1982).

Selden Island: Three body sherds tempered with crushed steatite were found. The temper size was generally less than 1 mm, but a 10-mm chunk was also present. The paste of these sherds was hard, compact, and had a soapy texture. All three of the recovered sherds were cord marked. Impressions on one of the sherds indicated that a thin, close set cord, between 1- and 2-mm thick, was used for marking (Dinnel and Kavanagh 1990).

Accokeek Ware: Many ceramics were identifiable as Accokeek ware. The estimated dates for Accokeek materials in the lower Potomac drainage is 800-300 B.C. (Egloff and Potter 1982). Accokeek rim sherds share many similar stylistic and technological characteristics although there is some degree of variability in rim profiles, lip treatment, and surface treatment (Figures 8 and 9; Table 3). It should be noted that while a goal of the study was to formally define Accokeek types, the sample size did not allow for such a typology (Maureen Kavanagh, pers. comm., September 1993). While this was the case, three varieties of Accokeek ware were recovered, and designated as Accokeek "cord-marked," Accokeek "coarseware," and Accokeek "micaceous sand-tempered." The total number of identifiable Accokeek sub-types found was 449. These sub-types may eventually prove to be of some use for typology once more data is obtained from other sites. The sub-types are broken down by variety below.

Accokeek Cord-Marked: In total, 11 rim sherds, 1 base, and 222 body sherds were found. Of the 11 rim sherds, most exhibited straight profiles (Table 4). Of the 12 pieces in which lip treatment could be identified, there was some degree of variation (Table 5). The paste of this type is friable, coarse, and has a very sandy or gritty texture. This sample included the following paste colors: orange, red, tan, brown, grey, and black. Most of the sherds were variegated in color due to poor control of the firing temperature, and uneven oxidation. The density of sand in the paste ranged from 5-50%, with the mode between 30 and 40%, and the mean of 35%. The vessel thickness ranged from 4.4 to 10.1 mm, with a mean of 6.82 mm.

As indicated by the name of this type, all of the sherds had cord-marked exterior surfaces. The marks were applied by the use of a cord-wrapped paddle. The cord used appears to have been 98.5% S-twist, and 1.5% Z-twist, loosely twined, and 1-2-mm thick. The cord spacing was often irregular and ranged from 2-4 mm. The marking design usually angled downward (away from the rim) at less than a 45 degree angle. The cord impressions were crossed occasionally or angled downward and left of the rim. Eight of the sherds (3.4%) were marked by a paddle that was wrapped with overlapped crossed cords, and appear similar to net impression, but no knots were present. A single sherd was decorated with incision (Dinnel and Kavanagh 1990).

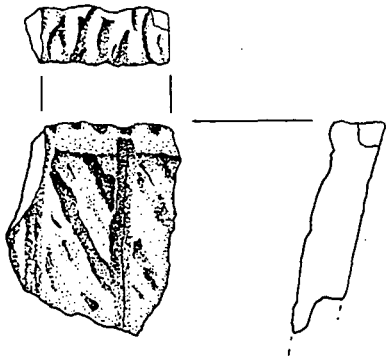

#1047

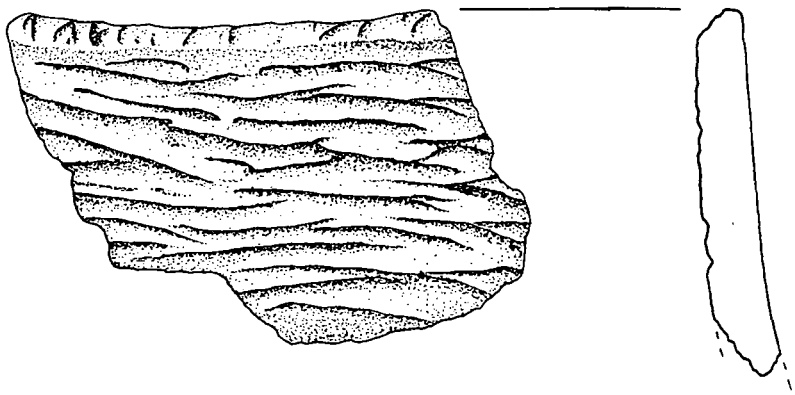

#1111, #1120, & #1122

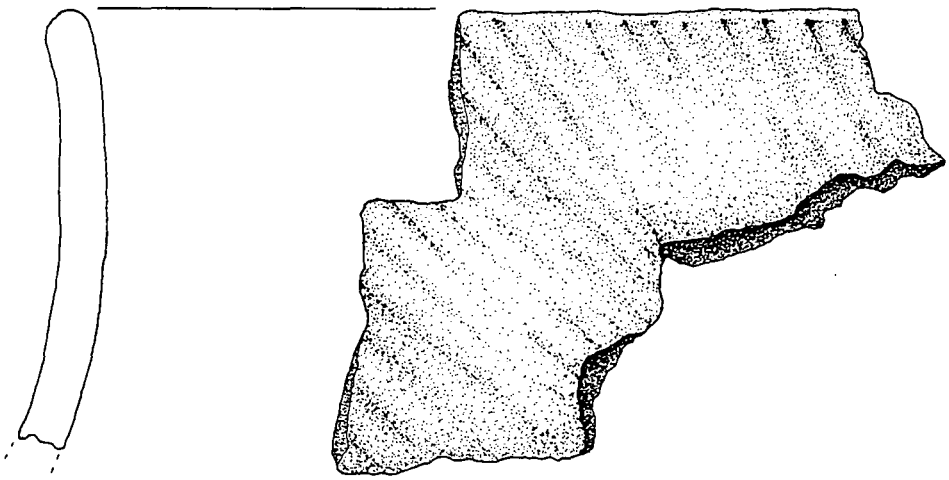

#2

Source: Engineering-Science (Drawn to Scale)

Kettering Park Site

Figure 8
Accokeek Rim Sherds

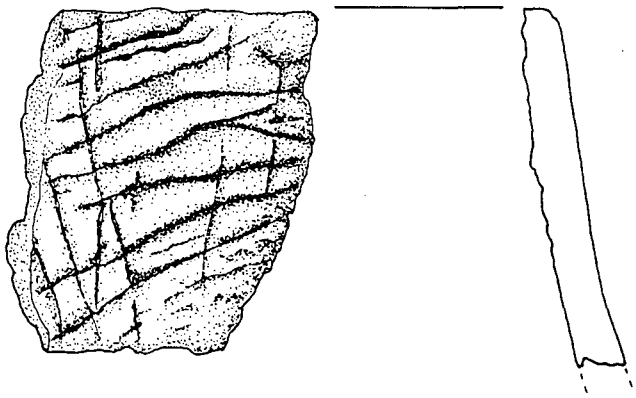

#871

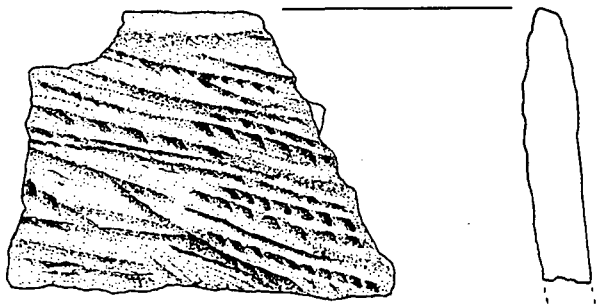

#905

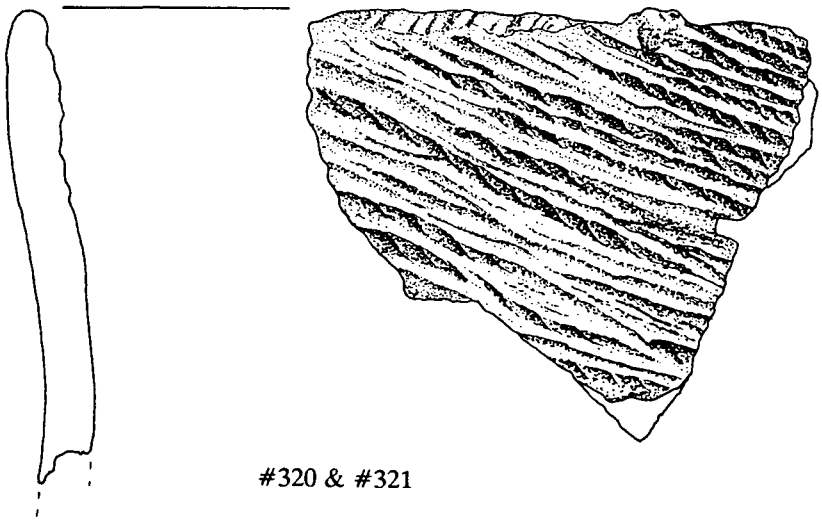

#320 & #321

Source: Engineering-Science

(Drawn to Scale)

Kettering Park Site

Figure 9
Accokeek Rim Sherds

Table 3: Rim Sherds

LOT	TYPE	RIM PROFILE	LIP TREATMENT	SURFACE TREATMENT
2.001	ACCOKEEK	INVERTED		
182.001	ACCOKEEK	STRAIGHT		CORD-MARKED; OBLIQUE DOWNWARD TO RIGHT
871.001	ACCOKEEK	STRAIGHT	ROUNDED, PLAIN	CORD-MARKED; OBLIQUE DOWNWARD TO LEFT
905.001	ACCOKEEK	STRAIGHT	ROUNDED WITH ONE CORD IMPRESSION	CORD-MARKED; OBLIQUE DOWNWARD TO RIGHT
1047.001	ACCOKEEK	STRAIGHT	FLATTENED WITH CORD IMPRESSIONS PERPENDICULAR TO RIM; TWO PARALLEL INCISIONS 1.1 CM. APART PERPENDICULAR TO RIM (MADE WITH ROUNDED TOOL)	CORD-MARKED; DOWNWARD TO RIGHT
1034.001	ACCOKEEK	STRAIGHT	CAMBERED OUTWARD FLATTENED WITH CORD IMPRESSION	CORD-MARKED; CROSSED
793.001	ACCOKEEK		ROUNDED WITH CORD IMPRESSION	CORD-MARKED OBLIQUE; DOWNWARD TO RIGHT
810.001	ACCOKEEK		ROUNDED, PLAIN	CORD-MARKED; HORIZONTAL
953.001	ACCOKEEK		CAMBERED OUTWARD FLATTENED WITH CORD IMPRESSION	CORD-MARKED; CROSSED
781.001	ACCOKEEK (CROSS-CORD)	EVERTED	FLATTENED WITH OBLIQUE DOWEL IMPRESSION	CORD-MARKED; CROSSED ON PADDLE
771.001	ACCOKEEK (CROSS-CORD)	STRAIGHT		CORD-MARKED OBLIQUE; DOWNWARD TO RIGHT
462.001	ACCOKEEK "COARSEWARE"	INVERTED	CORD IMPRESSED	CORD-MARKED OBLIQUE; DOWNWARD TO LEFT
272.001	ACCOKEEK "COARSEWARE"	STRAIGHT	ROUNDED PLAIN	CORD-MARKED OBLIQUE; DOWNWARD TO RIGHT
321.001	ACCOKEEK "COARSEWARE"	STRAIGHT		CORD-MARKED OBLIQUE; DOWNWARD TO RIGHT
375.000	ACCOKEEK "COARSEWARE"	STRAIGHT		
1111.001	ACCOKEEK "COARSEWARE"	STRAIGHT	CAMBERED OUTWARD WITH CORD IMPRESSION	CORD-MARKED; HORIZONTAL
190.003	ACCOKEEK "COARSEWARE"			
261.001	ACCOKEEK "MICA"	EVERTED		CORD-MARKED; HORIZONTAL
974.001	EARLY WOODLAND		CAMBERED OUTWARD FLATTENED WITH CORD IMPRESSION	CORD-MARKED; CROSSED
778.002	TOWNSEND		SCALLOPED	SMOOTHED
117.002	LATE WOODLAND			
152.001	LATE WOODLAND			

Note: Two unidentifiable rim sherds were also found.

Table 4: Rim Profiles for Accokeek Cord-Marked

QUANTITY	RIM PROFILE
6	STRAIGHT
1	EVERTED
1	INVERTED
3	UNDETERMINED

Table 5: Lip Treatment for Accokeek Cord-Marked

QUANTITY	LIP TREATMENT
3	ROUNDED, PLAIN
2	ROUNDED AND CORD IMPRESSED
2	CAMBERED OUT, FLATTENED, CORD IMPRESSED
2	FLATTENED AND CORD IMPRESSED
1	PINCHED
2	UNIDENTIFIABLE

Accokeek "Coarseware": In total, 119 sherds of this type were recovered: 4 rim sherds, 2 bases, and 112 body sherds (Figure 10). Rim treatment, lip treatment, and surface treatment could be determined on several sherds (Table 3). This type differs from the Accokeek cord-marked variety in that it is less sandy in texture, and the cord used for the surface treatment is coarser. The non-plastic inclusions in the Accokeek "coarseware" paste are sand and crushed quartz. The crushed quartz ranged in size from 1-11 mm with a mode of 4 mm. The paste of this ceramic type is chunky, moderately compact, and gritty or rough in texture. The percentage of sand present in the paste ranged from 5-50%, with a mean of 21%.

The vessel thickness represented in the sherds recovered ranged from 4.6-10.4 mm with a mean of 7.24 mm. The surface was cord-marked; a cord-wrapped paddle was used to pattern the surface of the vessel when the clay was still plastic. Cord with an S-twist that was between 1-4-cm thick and spaced 2-5 cm apart was used. The cord-marked pattern generally angled downward and to the right from the rim at an angle of 20 to 40 degrees. The range of cord-marked patterning included the application of the design downward and to the left, and

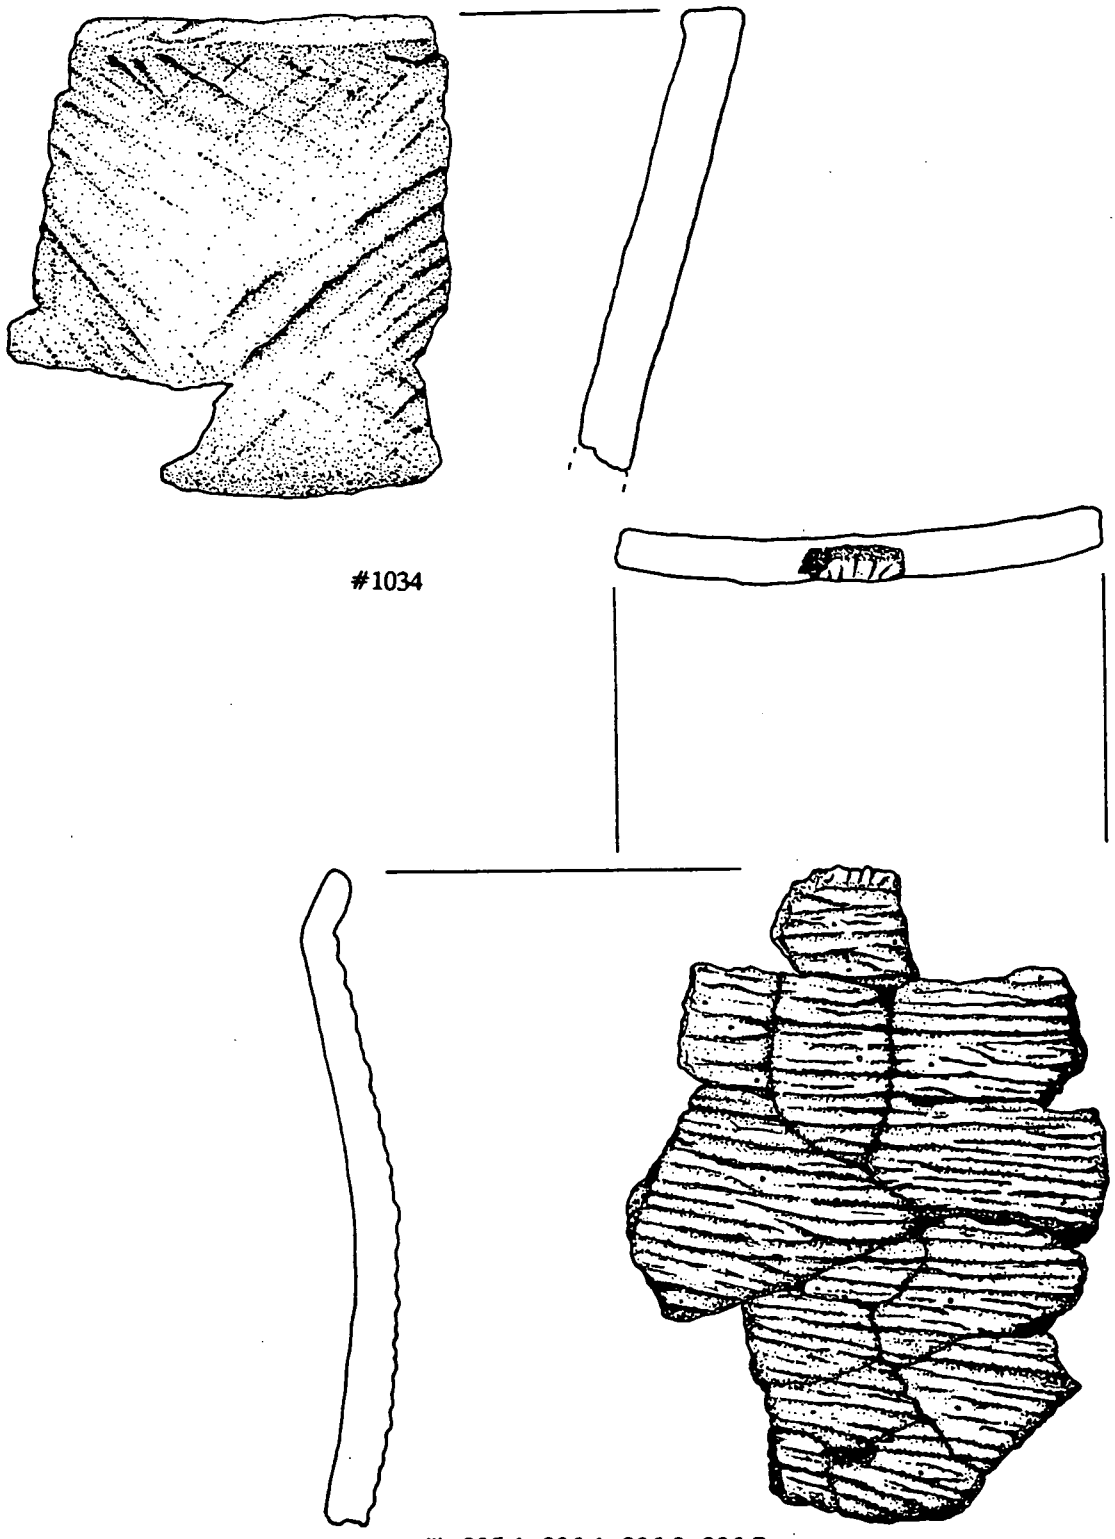

(Drawn to Scale)

Source: Engineering-Science

Kettering Park Site

Figure 10
Accokeek Rim Sherds

occasionally in a direction that parallels the rim. The majority of the interiors were hand smoothed, but a few were scraped. All recovered fragments were undecorated.

Accokeek "Micaceous Sand-Tempered": Two rim sherds and 94 body sherds of a single vessel were recovered (Figure 10). The paste of this vessel has a sandy texture, is slightly friable, is fine-grained, and is tempered with micaceous sand. All exterior surfaces glitter due to the mica present in the paste. Vessel thickness ranged from 4.95-7.1 mm with a mean at 6.54 mm.

The exterior surfaces were cord-marked, by a paddle wrapped with fine S-twist cord. The cord width was between 1 and 2 mm and the wrapping was set 1-4 mm apart. The cord-marked pattern ran parallel to the rim. Interior surfaces were hand smoothed. The vessel was undecorated but the surface of the rim edges were marked with the edge of the cord-wrapped paddle. This vessel is similar to Type D, micaceous sand-tempered pottery from the Accokeek Creek site (Stephenson and Ferguson 1963:127). It was recovered from three contiguous excavation units, and an adjacent STP. The rim sherds were thinned, straight, and everted at the lip (Dinnel and Kavanagh 1990).

Unidentified Early Woodland: A single rim and 150 body sherds were found that had a sandy gritty texture and a coarse, friable paste. The temper was medium to coarse sand and in some cases crushed quartz was also present. All exterior surfaces were too eroded for classification, and the interior surfaces were either eroded or smoothed (which is non-diagnostic). The range of thickness was from 3.7 to 10.4 mm, with a mean of 6.86 mm. Paste color was various mixed ferruginous oranges and dark greys.

Dinnel and Kavanagh (1990) originally believed that there was a relationship with Popes Creek pottery, but when they compared them to Accokeek assemblages the similarities were far greater. They classified these sherds as dating to the Early Woodland based on the texture of the paste, the color, and the mean thickness of the sherds. They concluded by stating that "connections with the Accokeek ware are reinforced by the absence of any identifiable Popes Creek ceramics at this site" (Dinnel and Kavanagh 1990).

Middle Woodland Ceramics

Mockley Ware: A single base and 10 body sherds of this Middle Woodland ware were recovered. This type dates to A.D. 200 - A.D. 800 (Egloff and Potter 1982). These few sherds

and was chunky and friable; it was tempered with shell that had leached out. The thickness ranged from 6.9-16.7 mm; the mean thickness is 9.15 mm. Eight of the sherds had net impressed surface treatment, the mesh was composed of many small knots evident in the surface impression, and no decoration was present (Dinnel and Kavanagh 1990; Stephenson and Ferguson 1963).

Late Woodland Ceramics

Townsend Ware: In total, 53 sherds of this type were recovered including 1 rim sherd and 52 body sherds. The paste of Townsend Ware is fine-textured; the fine shell temper had been leached out, but the holes that remain are aligned. The texture of the paste ranges from chalky to sandy; the sandy paste had a higher grit content. The surface is paddled and fabric impressed.

The fabric used for the surface impression appears to have been a weft-face weave, with a thin flexible weft made of twisted cord and a warp that was moderately rigid. The width of the weft threads was 1-2 mm, and the width of the warp threads was 5-9 mm. The interior was frequently smoothed and occasionally scraped. Twenty of the sherds recovered had evidence of smoothing, and 15 were too eroded to determine whether they were decorated.

In addition three sherds were decorated with two or three incised lines. The presence of these incisions suggests that they date to the first half of the Late Woodland Period between A.D. 900 and A.D. 1250 (Griffith 1982). The single rim sherd was scalloped (Dinnel and Kavanagh 1990; Blaker 1950; Stephenson and Ferguson 1963; Egloff and Potter 1982).

Moyaone Ware: Six body sherds of this Late Woodland ware were recovered, which dates to the final part of the period, A.D. 1350 to A.D. 1600 (Stephenson and Ferguson 1963; Egloff and Potter 1982). The paste is fine, compact, smooth-textured, and tempered with fine micaceous sand. The body thickness ranged from 4.5 to 7.15 mm with a mean of 5.8 mm. The surfaces of all recovered sherds were plain (Dinnel and Kavanagh 1990).

Potomac Creek Ware: A single body sherd of this ware was recovered. Potomac Creek ware dates to the latter half of the Late Woodland Period A.D. 1300 - A.D. 1700 (Stephenson and Ferguson 1963; Egloff and Potter 1982). The paste is finely made, compact, hard, and had a sandy texture. The thickness of the sherd was 6.2 mm, and its surface was cord-marked. The

temper was fine sand mixed with crushed quartz, and the interior of the vessel was oxidized (Dinnel and Kavanagh 1990; Stephenson and Ferguson 1963; Egloff and Potter 1982).

Shepard Ware: Five body sherds tempered with crushed quartz and made of clayey dense paste were recovered. The thickness ranged from 4.0 to 7.0 mm, and the surface was marked by a cord-wrapped paddle. One of the sherds recovered was from the collar portion of a vessel. Shepard ware dates to A.D. 900 - A.D. 1450 (Peck and Bastian 1977; Kavanagh 1982; Stewart 1982; Dinnel and Kavanagh 1990).

Riggins Ware: The total number of fragments recovered was 16 body sherds. The paste has a sandy/gritty texture and is compact; the temper is gneiss/schist and/or quartz. Eleven of the sherds were fabric impressed and looked very similar to Townsend ware. Surface smoothing was present on two of the sherds; the remaining three were badly eroded. Vessel thickness ranged between 4.0 and 9.0 mm, with a mean thickness of 6.3 mm. Riggins ware dates to the second half of the Late Woodland Period (Lopez 1971; Kavanagh 1982; Dinnel and Kavanagh 1990).

Lithic Artifacts

This section presents technological descriptions of all classes of stone artifacts. A total of 4,788 stone artifacts was recovered from the site. The stone artifacts represent 71.8% of the total prehistoric artifacts recovered. Since the Kettering Park Site contained a large number of stone artifacts, much attention was given to describing and analyzing the assemblages.

The lithic assemblages were organized into standardized categories, thereby providing a basis for intrasite and intersite comparative analysis. Lithic tool manufacture is a reductive process, involving the removal of material until a desired or appropriate form is reached. The analysis therefore focused on the varieties of tools produced and on the debris resulting from the manufacturing process.

The projectile points were classified into standard stylistic typologies of the eastern United States. Assignment of projectile points by morphological types provided information on the period of site occupation, and point attribute measurements provided intersite comparative information. To characterize the technologies employed at the site, all of the stone industries were classified into bifacial, unifacial, and bipolar categories. Flake types were examined to determine the quantity and stages of tool manufacture. Classifying debitage by type identified the kinds of items manufactured and maintained on the site. Lithic raw materials were studied

by artifact type to provide information about prehistoric selection and use of stone. The diagnostic artifacts were made from local secondary lithic sources and more distant secondary sources, hence trends by chronological period were studied to discover trends in the temporal patterning of raw material selection. Functional determination of the tools was based on a various lines of evidence, including gross morphology, breakage patterns, edge angles, and residues.

The following discussion is divided by morphological categories. Where appropriate, the categories are subdivided into further hierarchical unit for descriptive and analytical purposes.

Bifacially Flaked Stone Tools

Bifacially flaked stone tools consists of Projectile Points, Projectile Point Fragments, Stage 1-3 Bifaces, and Unclassifiable Biface Fragments. A list of biface measurements appears in Appendix F. Table 6 quantifies bifacial types by the materials utilized for their manufacture. Quartz and quartzite are the most frequently used materials for the manufacture of all bifaces. The projectile points consist of a greater diversity of raw material types. The Stage 1-3 bifaces are represented by quartz and quartzite, probably local raw materials. In the following sections, more specific information about projectile points and raw materials is presented.

Table 6: Biface Types By Material

Tool Type	Quartz	Quartzite	Chert	Rhyolite	Argillite	Total
Projectile Points and Point Fragments	31	16	4	7	1	59
Stage 1-3 Bifaces	9	7		1		17
Unclassifiable Biface Fragments	18	3	3	2	1	27
TOTAL	55	28	7	10	1	102

The Projectile Points

The projectile point types are discussed in order of temporal subdivisions. Specific projectile point types are presented alphabetically within each temporal group. The projectile points are compared to other Northeastern and Middle Atlantic sites. If a projectile point type consists of a single specimen, an illustration is provided, and where greater than one specimen, photographs are provided.

Middle Archaic Period

Normanskill (n=3) (Ritchie 1971) (ranges for Figure 11)

	Range
Maximum Length	40-43 mm
Maximum Width	17-22 mm
Maximum Thickness	8-9 mm
Shoulder Width	17-22 mm
Neck Width	12-16 mm
Base Width	17-21 mm
Width/Thickness	2.1-2.4

Raw Material: 1 quartz, 2 quartzite

Description: This projectile point type tends to have a narrow triangular blade, and all of the examples from the Kettering Park Site had slightly concave bases. All three of the specimens of this type were nearly complete; one was missing its tip and the other two were missing a basal corner. The quartz projectile point had a very narrow and sharp tip that may indicate its use as a graver or perforator; its blade was bevelled. This projectile point also had a margin spall, and both its stem and sides were ground. One of the quartzite specimens was exceptionally thick near its tip, with one straight side and one concave side due to resharpening. This projectile point also had grinding on its base and notches, and its tip was broken at an impact fracture. The other quartzite specimen appears to have been resharpened and exhibited severe hinges along both sides due to thinning failures. This projectile point displayed moderate grinding along its base and stem. Although two of the three specimens bore evidence of grinding, such hafting element modification is a rare feature on Normanskill points (Ritchie 1971).

Chronology: Ritchie (1971) dates this projectile point type to the Middle Archaic (6,500-2,500 B.C.). According to Ritchie (1971), Normanskill points are an element of the Vosburg complex of the Laurentian tradition. In his view, these points are a morphological transition between Lamoka side-notched points and Brewerton side-notched points.

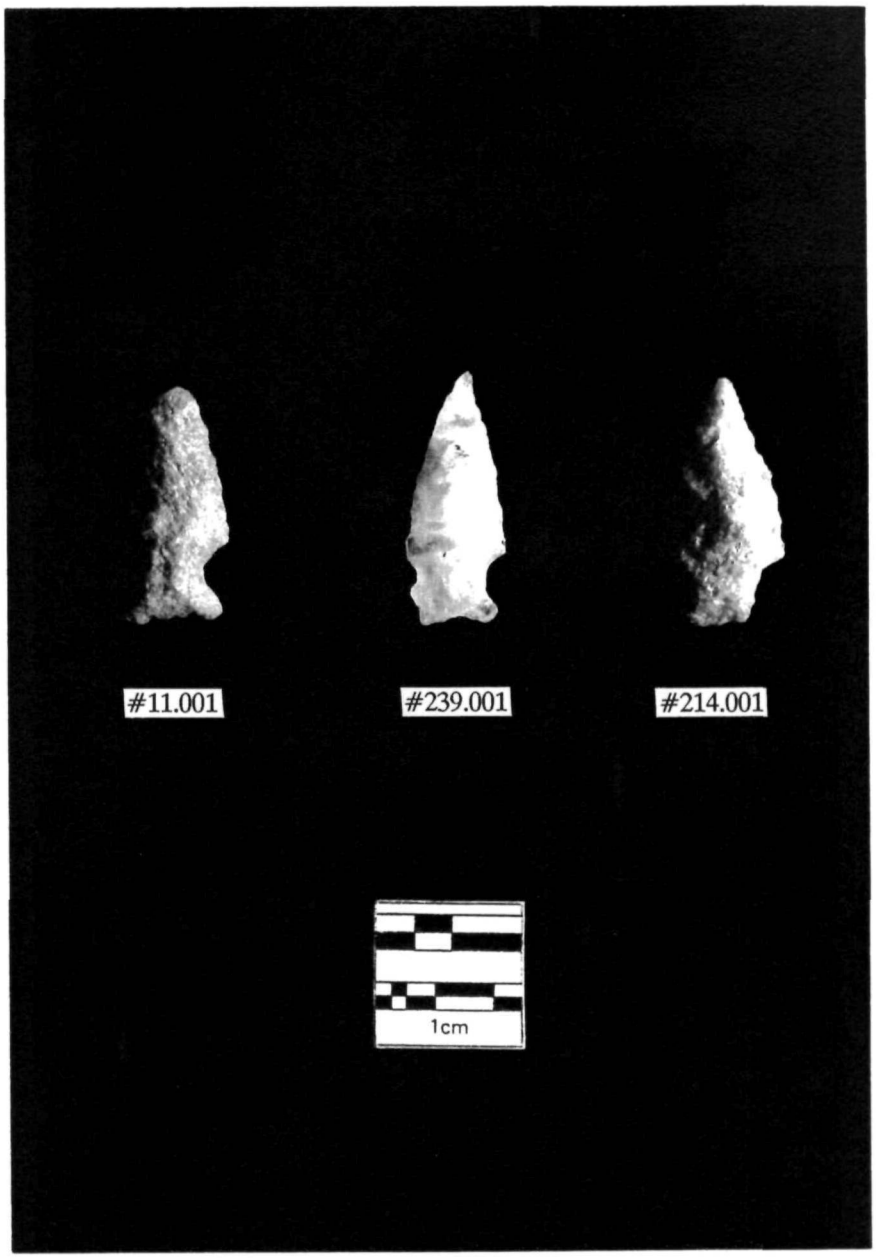

Source: Engineering-Science

Kettering Park Site

Figure 11
Normanskill Points

Comparative Data: Ritchie (1971) reported New York projectile points had lengths that ranged from 35-67 mms, most falling between 40-49 mms; and a thickness that ranged from 4.6-9 mms with the majority at 6 mms thick. The distribution of this type in New York clusters along the Hudson River and its tributary streams. They have been found at the following New York state sites: the Harris site in Saratoga County, the Lotus Point site in Green County, and a large sample (number not provided) at the Vosburg site in Albany County. The Kettering Park Site examples are at the small end of Ritchie's dimensional ranges, except in terms of thickness.

Late Archaic Period

Bare Island (n=3) (Stephenson and Ferguson 1963; Ritchie 1971) (Figure 12)

	Range
Maximum Length	37-71* mm
Maximum Width	23-35 mm
Maximum Thickness	9-10 mm
Shoulder Width	23-35 mm
Neck Width	19-24 mm
Base Width	17-20 mm
Width/Thickness	2.3-3.5

* Length of incomplete tool

Raw Material: 1 quartz, 2 quartzite

Description: Projectile points of this type have triangular blades, with shoulders that range from sharp to slightly rounded. The points are generally symmetrical and tend to be thick in cross section when they are made of quartz or quartzite (such as those in this sample). The specimens in this sample were of three disparate sizes, and each had a slightly different stem. One quartzite point had a contracting stem with a flat base, the other quartzite specimen had a

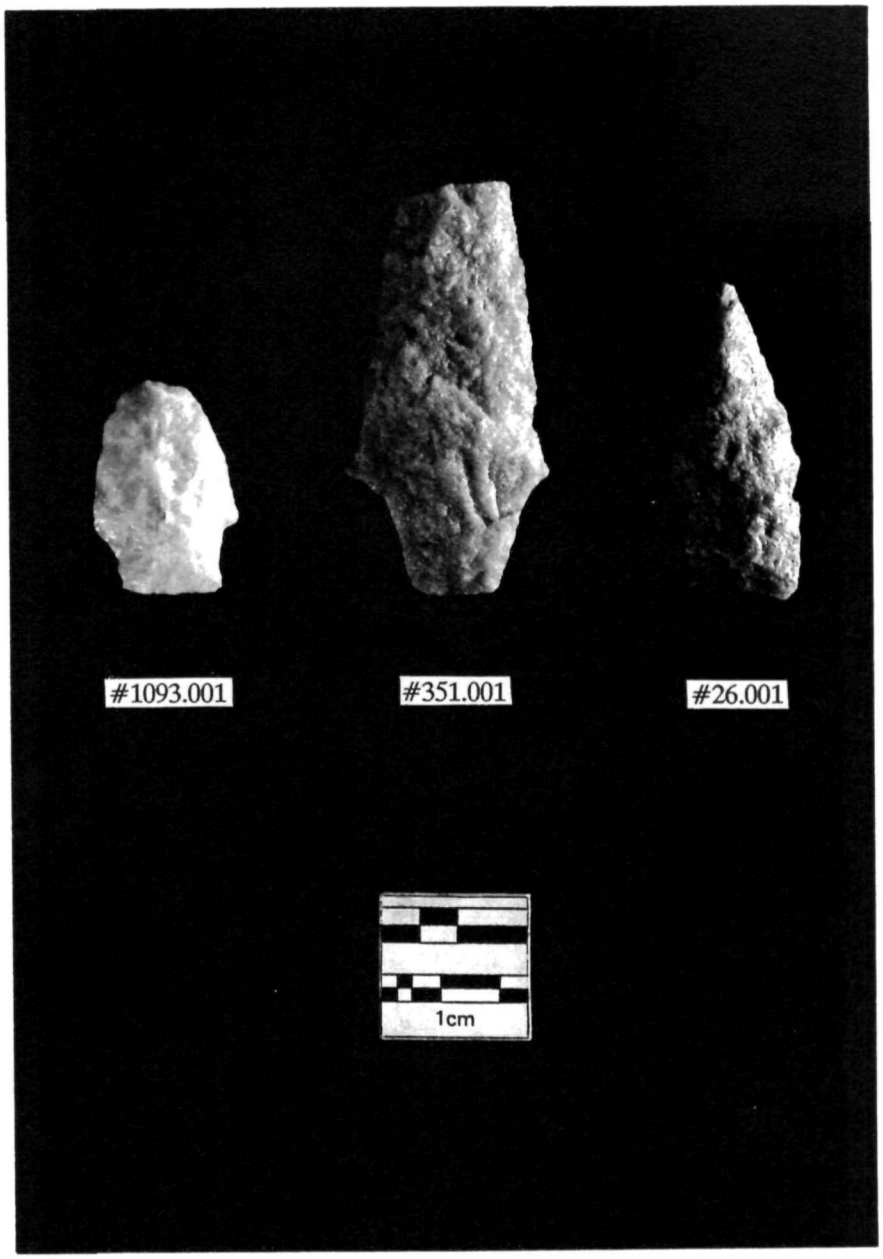

Source: Engineering-Science

Kettering Park Site

Figure 12
Bare Island Points

rectangular stem with a concave base (the sharp bevelling of its blade made the stem appear to twist); and the quartz point had a stem with slightly concave sides and a straight base that was missing a very small piece of one corner. The quartz point had a rounded tip that appears to have been formed in three stages: at some point during its use the narrow tip of this point apparently was broken off; this break was then reworked through pressure flaking and the tip became broader; then at its last usage, the tip appears to have been damaged again. The remnant tip has evidence of reworking near one edge, and damage (perhaps through impact) at the other side of the tip. The blade also contained a margin spall, the base had been thinned, and the stem had been ground slightly.

The larger quartzite projectile point had its tip snapped off in one sharp, clean break. This point also exhibited many step fractures along its blade and at its shoulder, and had a margin spall. The base was thinned but not ground, and the edges of the blade had been resharpened. The remaining quartzite projectile point was nearly complete, missing only one shoulder, had a sharply bevelled blade, and a narrow distal end with only a small fraction of its tip missing.

Chronology: Ritchie (1971) dates this point type to the Late Archaic (2500-1000 B.C.). It is contemporaneous with the use of steatite bowls, based on reports from numerous sites on the Lower Susquehanna River, and at the Kent-Hally and Fallen Tree sites on Bare Island.

Comparative Data: Ritchie (1971) reported that Bare Island points have been found throughout New Jersey and into eastern New York. Areas with particularly large samples include Staten Island, Long Island, and along the Hudson Valley to Saratoga County (at least). One site in Green County (Ctl.1) provided a sample of 114 points. The specimens from New York ranged in length from 29-93 mms (mean=49); the reported widths ranged from 1/3-1/2 of the total length. Stephenson and Ferguson (1963) reported a sample of 269 specimens from the Accokeek Creek site with lengths ranging from 45-83 mms (mean=69), and widths from 16-30 mms (mean=21). Thicknesses ranged from 8-15 mms (mean=12). Bare Island points are Kinsey's (1959) "straight stemmed, Type A." Specimens from the Kettering Park Site are both above, below, and within the size range provided by Stephenson and Ferguson, and generally within the range reported by Ritchie (1971).

Brewerton Ear-Notched (n=2) (Ritchie 1971; Kinsey 1972) (Figure 13)

	Range
Maximum Length	38-46 mm
Maximum Width	20-22 mm
Maximum Thickness	8-10 mm
Shoulder Width	10-20 mm
Neck Width	15-17 mm
Base Width	20-22 mm
Width/Thickness	2.0-2.8

Raw Material: 1 quartz, 1 rhyolite

Description: These Brewerton ear-notched points are characterized by trianguloid blades, small side-notches, and concave bases that have flaked "ears" on either end. The Kettering Park Site sample consists of two complete projectile points. Both of the specimens had blades with one concave side and one convex side. The rhyolite point was crudely flaked and asymmetrical, and had a thinning failure in the form of a large hump on one face. The quartz point had a serious material flaw that ran up about 80% of the blade and parallel to the adjacent side. On both examples the basal ears were asymmetrical: the rhyolite point had both a thick and a thin ear, and the quartz point exhibited one basal ear longer than the other. The base and stem of the quartz point had been ground slightly, and its base thinned.

Chronology: Ritchie (1971) dates this form to both the Middle and Late Archaic (6500 B.C.-1000 B.C). He states that the ear-notched point is a minority type in the Brewerton assemblage (less than 8% of the total) (Ritchie 1971:22). Gleach (1987) assigns this type to the Late Archaic, which he dates to between 3700 and 2000 B.C.

Comparative Data: Ritchie (1971) provides the following size ranges for Brewerton ear-notched points: length ranging from 18-61 mms (most measure 24-37 mms; mean=39 mms); the maximum thickness ranges from 5-8 mms with a mode of 6 mms. Kinsey reported on a sample size of 10, with lengths ranging from 29-55 mms (mean=42), and widths ranging from

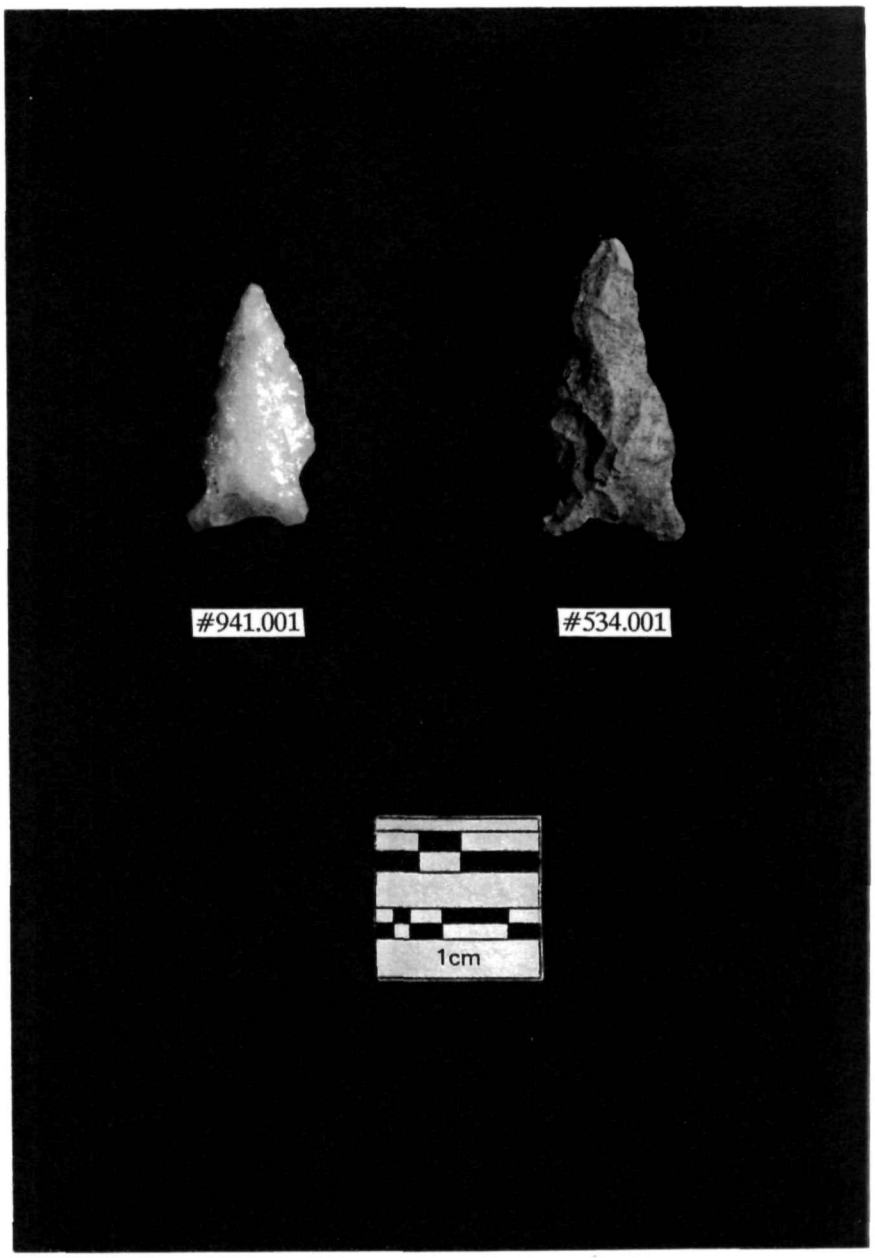

Source: Engineering-Science

Kettering Park Site

Figure 13
Brewerton
Ear-Notched Points

19-29 mms (mean=25). Brewerton ear-notched points have been reported for the lower Delaware Valley (Kinsey 1972), eastern New York, and southern New England (Ritchie 1971). The two specimens from the Kettering Park Site were on the high end of Kinsey's range.

Figure 14: Fishtail Projectile Points

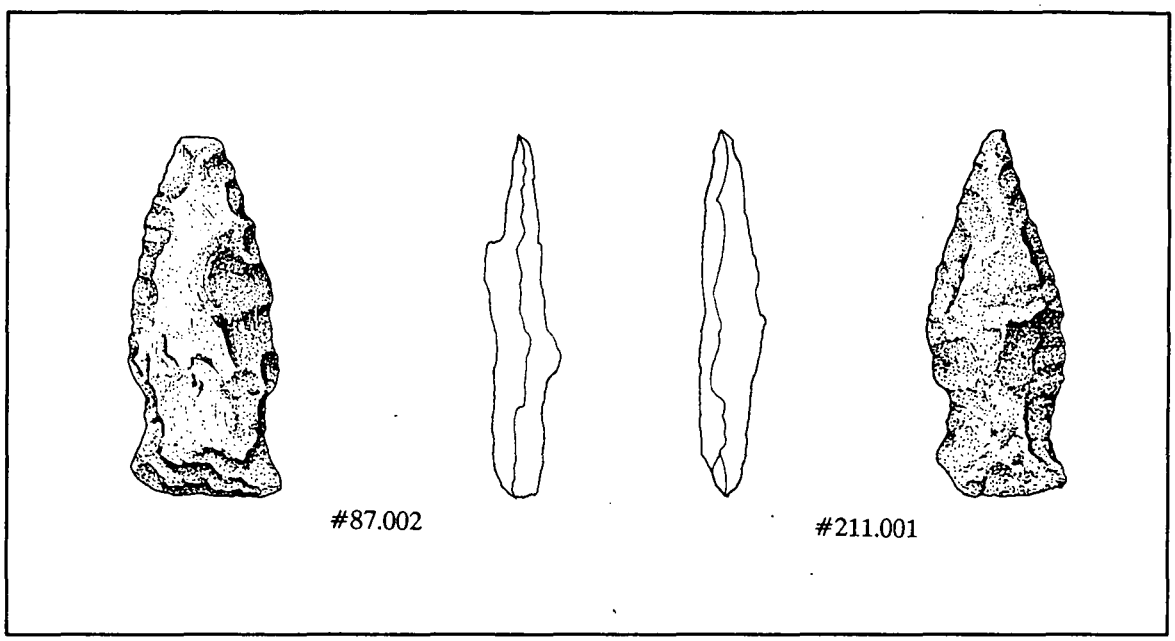

Drawn to Scale

Dry Brook Fishtail (n=1)

	Range
Maximum Length	48* mm
Maximum Width	21
Maximum Thickness	9
Shoulder Width	20
Neck Width	16
Base Width	21
Width/Thickness	2.3

Orient Fishtail (n=1)

	Range
Maximum Length	50 mm
Maximum Width	18 mm
Maximum Thickness	9 mm
Shoulder Width	17 mm
Neck Width	14 mm
Base Width	17* mm
Width/Thickness	2.0

* Measurement of incomplete specimen

61 *Kettering Park Site*

Raw Material: 2 quartzite

Description: The Dry Brook Fishtail projectile point was missing its tip, had a bevelled blade (due to resharpening), and a ground base, and had several hinge fractures located on the blade, neck, and base. This projectile point also showed evidence of thinning failure, as well as a margin spall, and grinding on both its base and stem. The Orient Fishtail point lacked a basal corner and exhibited a heavily bevelled blade due to resharpening.

Chronology: Gleach (1987) has dated this point from the Late Archaic to Early Woodland (2100-800 B.C.). Ritchie (1959) reported dates at the type site at Stony Brook as late as 763 B.C. $\pm$ 220. Fishtail points have been found in association with steatite vessels and occasionally with early pottery (Kinsey 1972).

Comparative Data: These two fishtail types are the only forms that have been recognized, and are roughly similar in geographic distribution and time span (Ritchie 1959). The main morphological distinction between the variants appears to be a slightly wider and more prominent shoulder associated with the Dry Brook type (Kinsey 1972).

Ritchie's sample of 71 Orient Fishtails measured 37.3-101.6 mms in length (mean=53.2), 17.5-30.3 mms in width (mean=19.1), and 6.4-7.1 mms in thickness. A sample reported by Kinsey (1972) ranged from 41-71 mms in length (mean=50), 14-28 mms in width (mean=20), and 6-9 mms in thickness (mean=7). Dry Brook measurements were almost identical, with widths averaging slightly greater (Kinsey 1972). A Fishtail variant was defined among a small sample from Henrico County in central Virginia (Gleach 1985), with lengths ranging from 29-72 mms (mean=52.3), widths from 19-29 mms (mean=23), thickness 8-12 mms (mean=9.7). The Orient Fishtail from the Kettering Park Site falls exactly within the range described by Kinsey, and the Dry Brook Fishtail is slightly smaller than the mean described by Gleach.

Lamoka-Like (n=1) (Ritchie 1971) (Figure 15)

Figure 15: Lamoka-Like Point

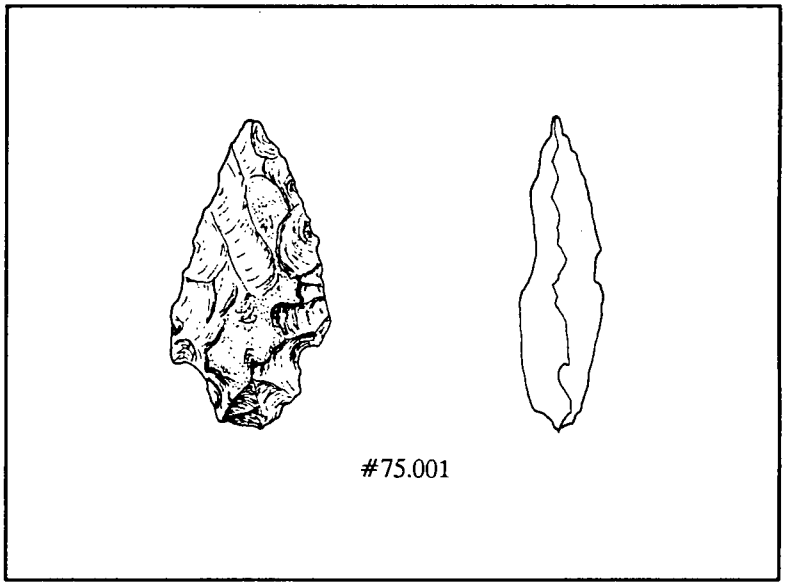

Drawn to Scale

	Range
Maximum Length	42 mm
Maximum Width	21 mm
Maximum Thickness	9 mm
Shoulder Width	20 mm
Neck Width	13 mm
Base Width	12 mm
Width/Thickness	2.3

Raw Material: quartz (n=1)

Description: This point was asymmetrical due to extensive blade resharpening. One blade edge had been resharpened more frequently leaving an elongated edge that crossed the original median line of the projectile point. This resharpened edge was still sharp, and its shape indicates that it may have last been used as a knife. The point's straight stem appeared to be

broken, and the break left a canted base. The body was thick and had several hinge fractures. The apparent breakage of the base prohibits an absolute type attribution.

Chronology: This point is dated to the Late Archaic (3400-2500 B.C.) in northeastern sites (Ritchie 1971; Kinsey 1972) and from 2600-1600 B.C. for Virginia (Gleach 1987).

Comparative Data: The type site for the Lamoka point lies in west-central New York. The geographic distribution of the type is centered there, though it is reported throughout the Middle Atlantic (Inashima 1989; Hranicky 1991). Most reported dimensional ranges are: 27-34 mms in length (mean=34), 14-28 mms in width (mean=17), and 4-8 mms in thickness (mean=6) for certain Pennsylvania examples (Kinsey 1972); 25-63 mms in length and 6 mms in thickness for the New York examples (Ritchie 1971). The specimens from southwest Virginia range from 28-34 mms in length (mean=31), 15-24 mms in width (mean=19), 8-16 mms (mean=11) in stem length, and 4-8 mms (mean=6) in thickness (Gleach 1985).

Susquehanna Broadspear (n=2) (Ritchie 1971) (Figure 16)

	Range
Maximum Length	25-36 mm
Maximum Width	26 mm
Maximum Thickness	7-9 mm
Shoulder Width	26 mm
Neck Width	16-19 mm
Base Width	21-24 mm
Width/Thickness	2.9-3.7

Raw Material: 1 quartz, 1 rhyolite

Description: This point type generally had a triangular blade with straight to convex sides, with an expanding stem and a concave base with "acute and prominent" tangs (Ritchie 1971:53). The two specimens of this type recovered from the Kettering Park Site are incomplete; both were distal ends, had thinned bases, and ground stems and bases. The quartz projectile point displayed a margin spall along a material flaw; the breakage of the point may

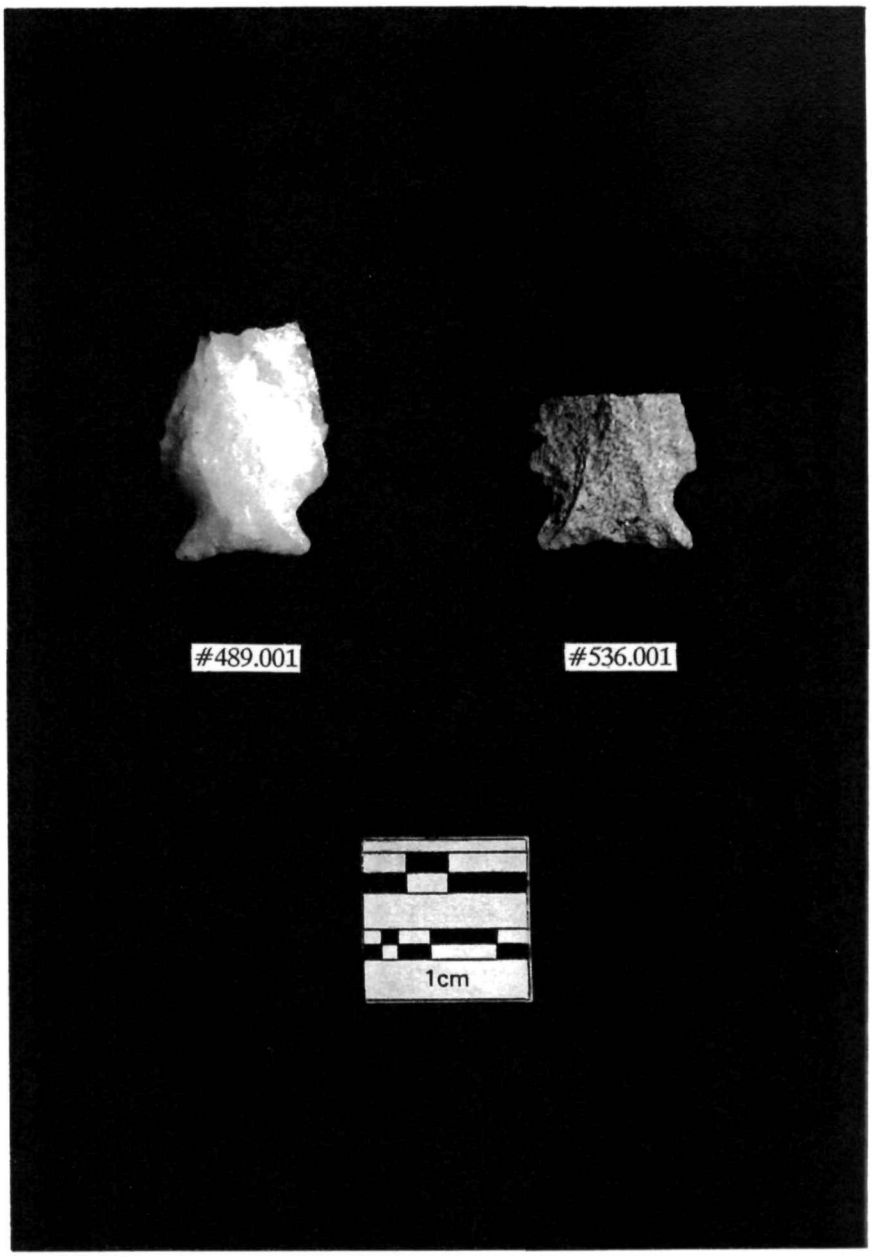

Source: Engineering-Science

Kettering Park Site

Figure 16
Susquehanna
Broadspear Points

have been caused by a massive impact fracture. The rhyolite point had a clean snap at about the mid-blade and was badly weathered.

Chronology: Ritchie (1971:53) dates the Susquehanna Broadspear point to the transition between the Late Archaic and Early Woodland Periods 1200-700 B.C. He specifies that this type is poorly understood because most known examples are surface finds. This point type is typically found in the Susquehanna River Valley in Pennsylvania and New York, as well as in the Delaware Water Gap, along the Seneca River and its tributaries, the Mohawk and Hudson Valleys, Oneida Lake, and in the Finger Lakes region.

Comparative Data: New York examples range from 36-75 mms in length (mean=55.5), but examples that are as long as 196 mms also have been reported occasionally. The thickness of these New York examples ranged from 4.6-9 mms (mean=6.8) (Ritchie 1971). The projected lengths for the examples from the Kettering Park Site are smaller and on the lowest end of the size range provided by Ritchie.

Untyped Late Archaic Straight-Stemmed Points (n=2) (Figure 17)

	Range
Maximum Length	53-61 mm
Maximum Width	22-23 mm
Maximum Thickness	9-18 mm
Shoulder Width	22-23 mm
Neck Width	15-20 mm
Base Width	14-15 mm
Width/Thickness	1.3-2.4

Raw Material: quartz (n=2)

Description: These projectile points had long, triangular blades and short straight stems; one was very weakly shouldered and had a convex base, and the other had a straight base. Both specimens had finished bases that were not thinned. These examples are very similar to the Holmes type discussed below.

Chronology: This point type is dated to the Late Archaic. Holmes points were recovered in association with the small variant Savannah River type at Plum Nelly, in Tidewater Virginia, in deposits radiocarbon dated to 2155 B.C. $\pm$ 95 (Potter 1982). A date of 1550 $\pm$ 150 was obtained at White Oak Point in Westmoreland County, Virginia (Waselkov 1982).

Comparative Data: There are no large samples of Holmes points, and there are no data on the size ranges. There is some overlap in morphology between these stemmed points and the Bare Island type as it was defined by Kinsey (1959). The time ranges between Holmes and Bare Island are similar enough for the difference to be of little consequence here. The points from the Kettering Park Site, though untyped, are very closely related to the Holmes type, and as such the possible time differences are also inconsequential.

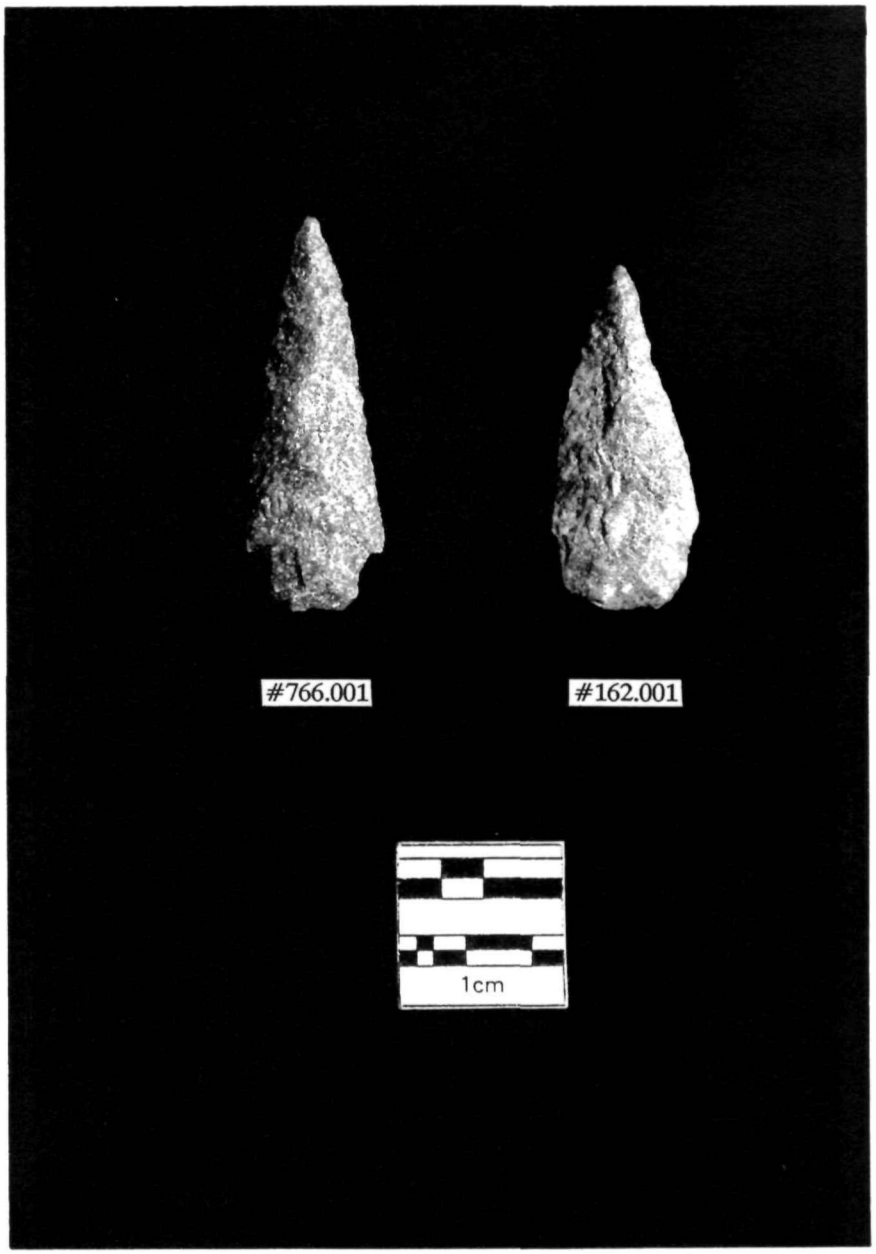

Source: Engineering-Science

Kettering Park Site

Figure 17
Untyped Late Archaic
Straight-Stemmed Points

Late Archaic/Early Woodland Periods

Calvert (n=1) (Stephenson and Ferguson 1963) (Figure 18)

Figure 18: Calvert Point

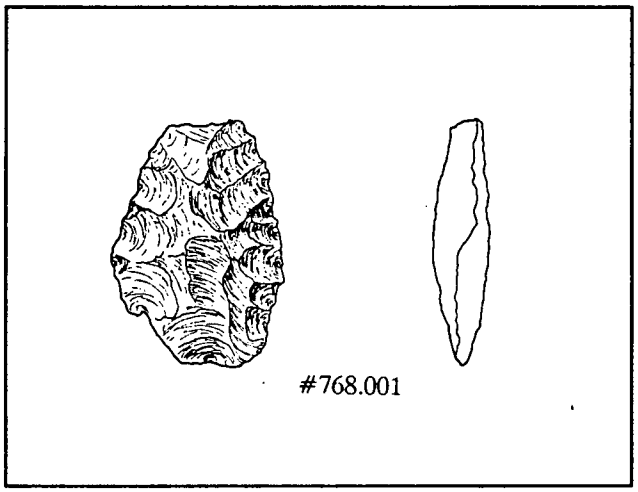

Drawn to Scale

	Range
Maximum Length	33* mm
Maximum Width	23 mm
Maximum Thickness	9 mm
Shoulder Width	23 mm
Neck Width	16 mm
Base Width	12 mm
Width/Thickness	2.9

* Measurement of Incomplete Specimen

Raw Material: quartz (n=1)

Description: This specimen was a stemmed point that had a triangular, straight-sided blade. Only one side of the stem remained; it was contracting and slightly incurving due to resharpening. The tip appeared to have been broken off by an impact fracture. Frequent resharpening left the point asymmetrical and the edges very sharp. One basal corner was missing, due to breakage along a material flaw.

Chronology: This point dates to the Early Woodland. Radiocarbon dated from 1200 to 1000 B.C. at White Oak Point in Tidewater Virginia (Waselkov 1982).

Comparative Data: The largest single assemblage of Calvert points resulted from excavations at the type site of Accokeek Creek south of Washington, D.C. (Stephenson and Ferguson 1963). These points ranged in length from 25-48 mms (mean=36), and in width from 18-27 mms (mean=22). The specimen from the Kettering Park Site (18PR174) fell near the mean for that assemblage.

Piscataway (n=8) (Stephenson and Ferguson 1963) (Figure 19)

	Range
Maximum Length	28-45* mm
Maximum Width	13-19 mm
Maximum Thickness	7-10 mm
Shoulder Width	13-18 mm
Width/Thickness	1.8-2.3

* Measurement of Incomplete Specimen

Raw Materials: quartz (n=7), rhyolite (n=1)

Description: All specimens were roughly lozenge shaped, with long blades that had straight to slightly concave edges, and a short stem. All of the points exhibited basal thinning, but only one had a ground base. Five of the points had contracting rounded bases and three had contracting pointed bases. Four points were complete and four were incomplete: three had their tips broken off (two were due to impact fractures), and one lacked at least a third of its blade and had damage to one shoulder. All of the incomplete examples were made of quartz. Three of the quartz specimens had resharpened blades, and two had shoulders that were slightly more rounded compared to classic examples. The remaining specimens displayed the more angular shoulders characteristic of this projectile point type.

The rhyolite projectile point was clearly a manufacturing reject; a large asymmetrical spall was missing on one face, and a portion of residual weathered surface on the other face that indicates that this piece probably was a reworked older point that showed signs of use wear on the tip.

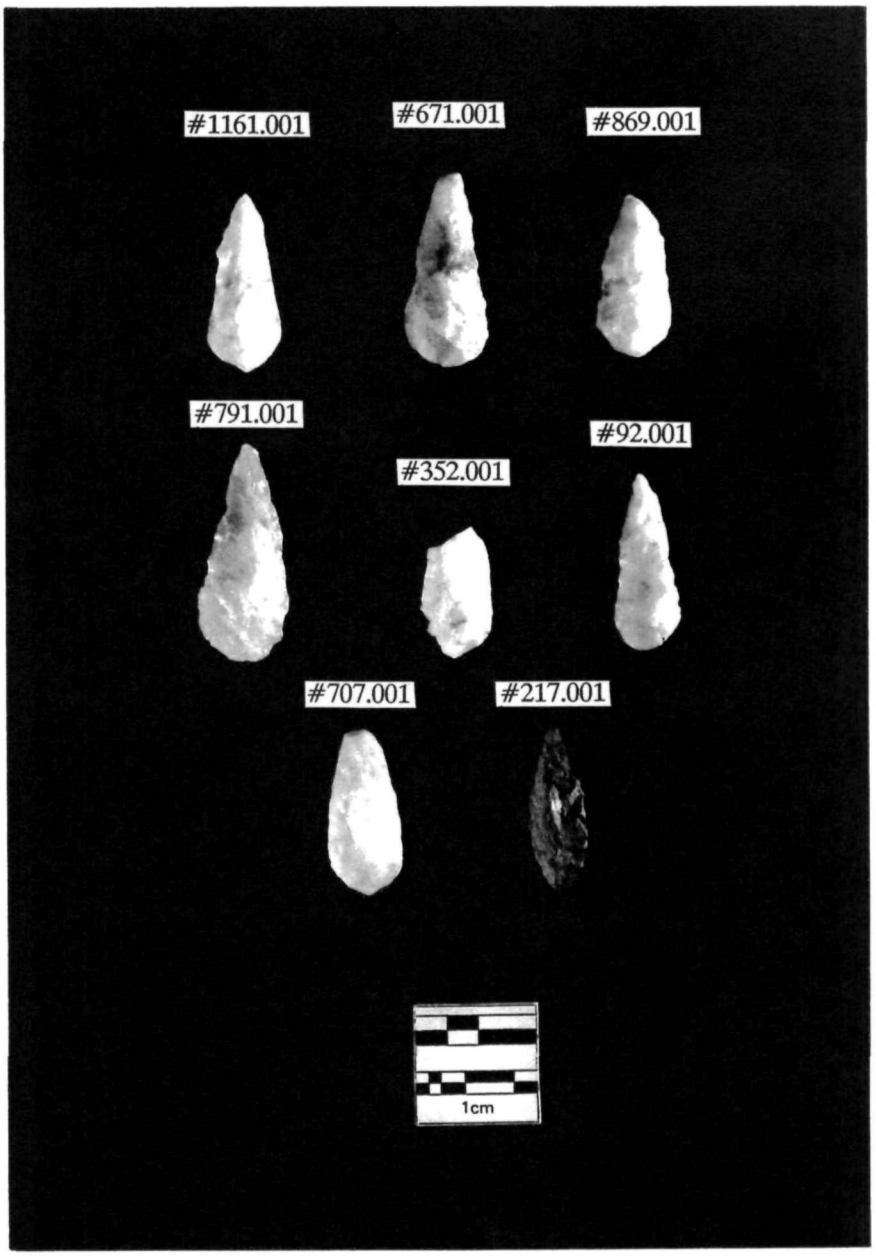

Source: Engineering-Science

Kettering Park Site

Figure 19
Piscataway Points

Chronology: The point type dates to the Early to Middle Woodland, possibly originating in the latter portions of the Late Archaic. Dated by association to 1000 to 500 B.C. in southern Virginia (Mouer *et al.* 1981). Lack of absolute dates associated with Piscataway points had led to several wide-ranging chronological assessments for this type. For example, they have been reported in presumed Late Archaic levels at Rupert Island off the Maryland shore of the Potomac (McNett and Gardner n.d.; Evans 1984), and below a component referred to as Vernon, radiocarbon dated to 3150 B.C. at the Fraser site, also located on the lower Potomac (McDowell 1972). Based on these data, Steponaitis placed Piscataway in her Late Archaic I sub-phase (4000 to 3000 B.C.) along the Patuxent River. Johnson's (1985) survey of Piscataway chronology suggested that manufacture of this type may have extended well into the Middle Woodland. A total of 310 Piscataway projectile points were recovered at the Accokeek Creek site. These points were dated to the Potomac Creek component of the Late Woodland Period (Stephenson and Ferguson 1963).

Comparative Data: Piscataway projectile points reported from the type site on Accokeek Creek ranged in length from 29-49 mms (mean=37), in width from 10-21 mms (mean=14), and in thickness from 5-10 mms (mean=7) (Stephenson and Ferguson 1963). The specimens from the Kettering Park Site were all close to means reported by Stephenson and Ferguson.

Potts Corner-Notched (n=1) (McCary 1953) (Figure 20)

Figure 20: Potts Corner-Notched Point

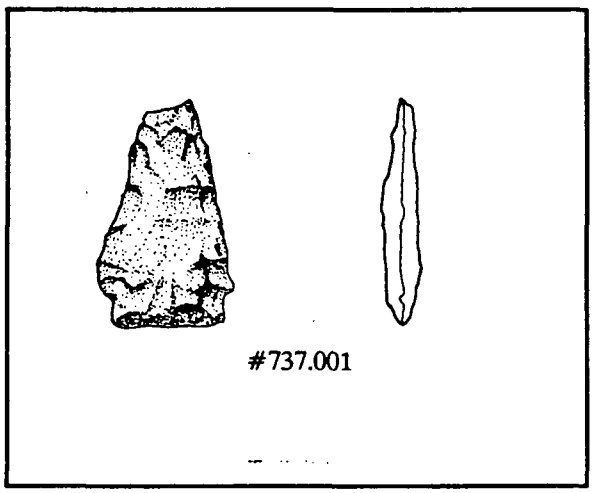

Drawn to Scale

	Range
Maximum Length	30* mm
Maximum Width	18 mm
Maximum Thickness	5 mm
Shoulder Width	18 mm
Neck Width	15 mm
Base Width	15 mm
Width/Thickness	3.6

* Measurement of incomplete specimen

Raw Material: rhyolite (n=1)

Description: This projectile point typically has a triangular blade and a short, straight stem with a straight base. The Potts corner-notched point recovered from the Kettering Park Site was a nearly complete point with a distal break, a finished base that was not thinned, and ground stem sides. It also was heavily weathered.

Chronology: Hranicky (1991:46) dates this projectile point type to 0-200 A.D. in Virginia. Gleach (1987:94) dates the use of this projectile point type to between 100 B.C and 400 A.D. There are no absolute dates for this point type, but it had been dated to the Early Woodland Period based on its associations.

Comparative Data: Gleach's (1987:94) sample size was 26 points from the Virginia Commonwealth University collection. They ranged from 20-46 mms in length (mean=34.5, std. dev.=8.6 mms), 17-30 mms in width (mean=22.2, std. dev.=3.2 mms), 4-10 mms in thickness (mean=6.5; std. dev.=1.3 mms) and their length-to-width ratio ranged from 1.05-2.21 (mean 1.67; std. dev.=0.33). The single Potts corner-notched point from the Kettering Park Site was within the Gleach's size range, tending towards the lower end of the scale.

Vernon (n=4) (Stephenson and Ferguson 1963) (Figure 21)

	Range
Maximum Length	35-43 mm
Maximum Width	20-25* mm
Maximum Thickness	7-9 mm
Shoulder Width	20-25* mm
Neck Width	10-15 mm
Base Width	11-19 mm
Width/Thickness	2.3-2.9

* Measurement of incomplete specimen

Raw Material: 3 quartz, 1 quartzite

Description: These points are typically thick, short, and wide, with a constricted stem and an expanding, straight base (Stephenson and Ferguson 1963). The four examples of this type from the Kettering Park Site generally conformed to this description, except one quartz projectile points that had a slightly concave base due to reworking. The quartzite point was complete, and the three quartz points were nearly so. One lacked a very small fraction of its tip, another was missing a small fraction of its shoulder, and the third was missing a fragment of one of its basal corners. One of the quartz points was made of a yellow and white diagonally veined quartz, and had a steeply bevelled blade. Another of the quartz points was asymmetrical due to a fracture along a material flaw that removed its shoulder; the shoulderless edge was then

resharpened. All of the specimens exhibited asymmetrical blade edges. One of the quartz points displayed grinding only at the junction of its neck and shoulder, another showed a ground base, and the last had grinding on its base and stem. All the specimens had unthinned finished bases.

Chronology: Vernon points were originally identified at the Accokeek Creek site (Stephenson and Ferguson 1963). The Vernon point is a poorly understood type, being identified only sporadically in the literature; dating is vague or questionable. The Vernon type is also often confused and/or lumped together with the Halifax type, often under the hybrid name of Halifax/Vernon (e.g., Johnson 1986; LeeDecker *et al.* 1991), and given dates ranging from Halifax-like late Middle Archaic through to the Early and Middle Woodland Periods. Stephenson and Ferguson (1963) placed the Vernon type in the Early Woodland base on relative associations with Calvert points and Marcey Creek ceramics.

In contrast, Vernon points were reported stratigraphically below Holmes points at Ruppert Island (McNett and Gardner n.d.; Handsman and McNett 1974; Evans 1984). Side-notched points reported as resembling Vernon were radiocarbon dated to approximately 3000 B.C. at the Jeffrey Rockshelter in southwestern Virginia (Johnson 1968), yet the points may in fact have been Halifax. The Vernon type was absent from Wright's (1973) chronology of the central Chesapeake area. Steponaitis' (1980) survey of the Patuxent River drainage placed Vernon in the Late Archaic II sub-phase (3000-2200 B.C.) contemporaneous with both the Halifax and Brewerton types. In her chronology, the Calvert type was diagnostic of the Early Woodland Period, and was believed to be associated with Accokeek Creek ceramics.

The Neha site (44FX1561) in Fairfax County produced the nearest to an absolute date known for side-notched points. A radiocarbon assay of 510 $\pm$ 90 B.C. was obtained from a pit feature at the site, associated with Vernon and Piscataway points as well as sandstone-tempered ceramics and a St. Albans point, the latter suspected of being scavenged and recycled (Moore 1990, 1992). Thus it appears that Stephenson and Ferguson's original chronological placement of the Vernon type may have been reasonably accurate.

Comparative Data: Stephenson and Ferguson (1963) reported a sample of 423 Vernon point with dimensions of 24-49 mms in length (mean=37), 16-30 mms in width (mean=23), and 6-13 mms in thickness (mean=10). The Vernon specimens from the Kettering Park Site fall within the range reported by Stephenson and Ferguson.

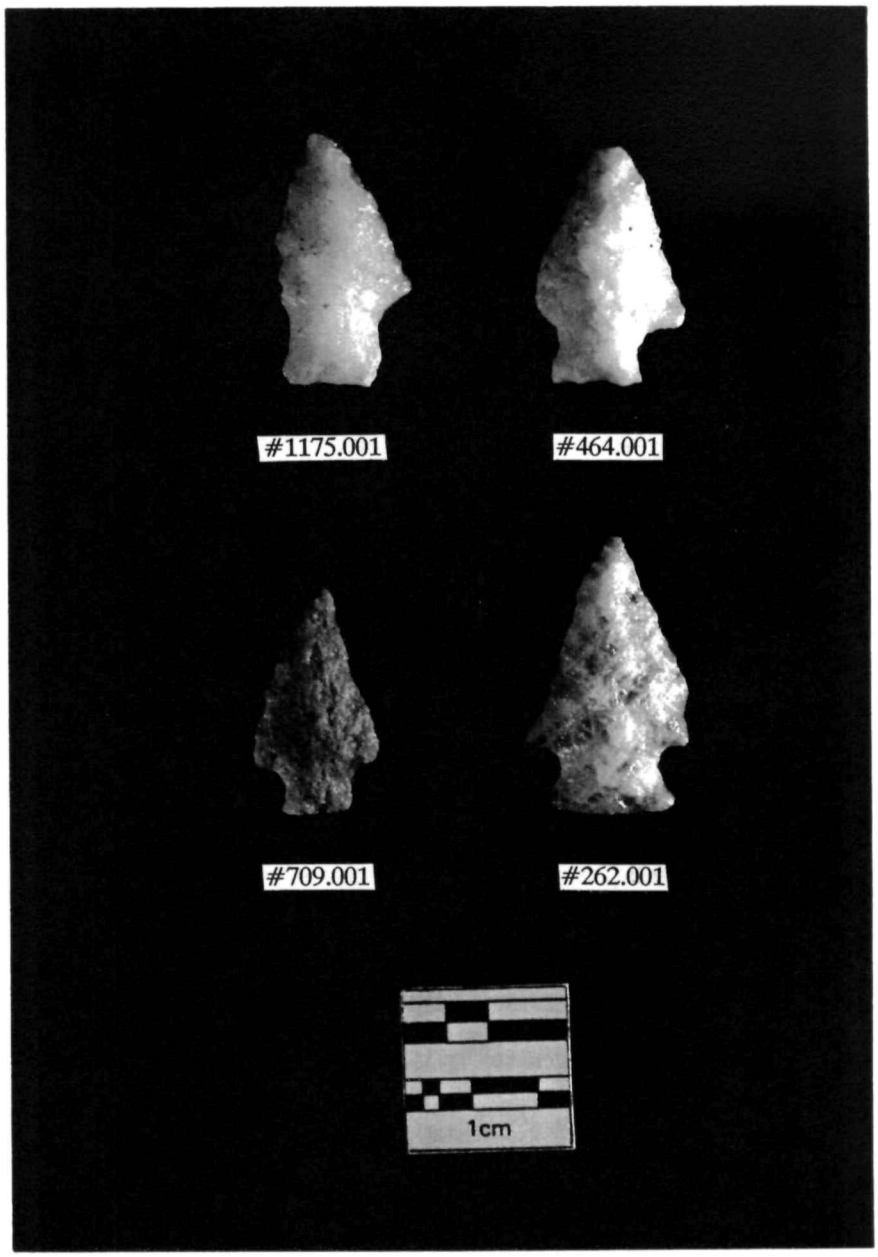

Source: Engineering-Science

Kettering Park Site

Figure 21
Vernon Points

Untyped Side-Notched Point (n=1) (Figure 22)

Figure 22: Untyped Side-Notched Point

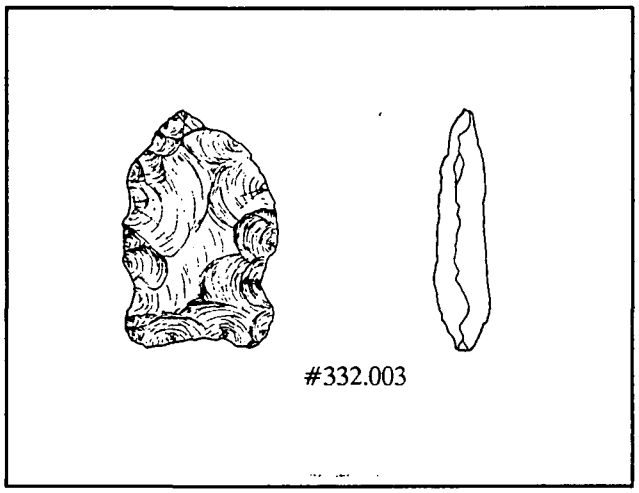

Drawn to Scale

	Range
Maximum Length	22* mm
Maximum Width	20 mm
Maximum Thickness	8 mm
Shoulder Width	20 mm
Neck Width	15 mm
Base Width	18* mm
Width/Thickness	4

* Measurement of incomplete specimen

Raw Material: quartz (n=1)

Description: This specimen was a quartz projectile point missing its tip and one of its basal corners. The blade was bevelled due to resharpening, the base was concave, and the remnants of the sides were straight. Both its base and notches were ground.

Chronology: This point probably dates to the late Middle or early Late Archaic. This untyped point appears to be related to the Halifax type. Halifax points are confidently dated to the late Middle or the early Late Archaic (Johnson 1986).

Late Woodland Period

Elongate Triangular Projectile Point (n=1) (Figure 23)

	Range
Maximum Length	30 mm
Maximum Width	28 mm
Maximum Thickness	7 mm
Base Width	28 mm
Width/Thickness	4

* Length estimated from existing lines

Raw Material: quartzite (n=1)

Description: This specimen was a distal end of a triangular projectile point that had a concave base due to a reverse hinge fracture, one straight side, and one slightly convex side. Its edges had been finely resharpened and its base was slightly asymmetrical.

Chronology and Comparative Data: This point type dates to the Late Woodland (see discussion of Levanna points below).

Levanna (n=8) (Ritchie 1971) (Figure 23)

	Range
Maximum Length	20-30 mm
Maximum Width	20-28 mm
Maximum Thickness	5-8 mm
Base Width	19-28 mm
Width/Thickness	2.9-5.0

* Length estimated from existing lines

Raw Material: dark yellow/mustard Jasper (n=1), quartz (n=4), quartzite (n=3)

Description: These are typically thin, relatively symmetrical points roughly in the shape of isosceles triangles. Blade edges were straight (n=3), slightly concave (n=1), and slightly convex (n=4). Five of the recovered points had thinned bases. Only two of the examples were complete; two had evidence of impact fractures; one exhibited a distal reverse hinge fracture; one had a distal fracture due to an undetermined error; one was a margin spall; and one was a distal fragment. Two of the quartz projectile points may have been manufactured by the reworking of an older point. The jasper specimen had lightly serrated edges and was markedly asymmetrical.

Chronology: This point type dates to the Late Woodland, 900 to 1350 A.D. The type is reported to have first occurred around 700 A.D. in New York state, but it was not commonly manufactured until 900 A.D. This projectile point type was gradually replaced by smaller, straight-based types, such as Madison, by the mid-fourteenth century (Ritchie 1971).

Comparative data: A sample of 250 Levanna points had been reported by Ritchie. Their lengths ranged from 22-76 mms (with most measuring between 32 and 45 mms), widths ranged from 21-35 mms, and the thickness averaged 5 mms (Ritchie 1971). Kinsey reported examples from the Upper Delaware Valley with lengths ranging from 18-45 mms (mean=34), widths from 18-34 mms (mean=22), and thicknesses from 3-5 mms (mean =4) (Kinsey 1972). The present specimens had a length range of 20-31 mms with a mean of 25.2 mms, below the means provided by Kinsey. The widths of the present specimens range from 21-28 mms with a mean of 24.8, slightly larger than Kinsey's mean and well within the range provided by Ritchie.

Madison (n=1) (Ritchie 1971) (Figure 23)

	Range
Maximum Length	13* mm
Maximum Width	21 mm
Maximum Thickness	5 mm
Base Width	21 mm
Width/Thickness	4.2

* Measurement of incomplete specimen

Raw Material: rhyolite

79 *Kettering Park Site*

Description: This small triangular point exhibited a straight base, one slightly convex blade edge, and one slightly concave blade edge. A break was evident on the remaining distal end, probably due to a flaw in the material.

Chronology: This point type dates to the Late Woodland (800 to 1650 A.D.). This projectile point type was originally referred to as the Mississippi Triangular by Scully (in Ritchie 1971), who later renamed the point as Madison. This type is similar to Caraway projectile points, dated to 1700 A.D. at the Doerschuk site in North Carolina (Coe 1964).

Comparative Data: Scully's original points were reported as measuring 13 to 60 mms (mean=25). Ritchie (1971) described a sample of 100 Madison points from an Iroquois site in New York with lengths ranging from 19 to 40 mms, widths from 13-27 mms, and thicknesses averaging 3 mms. Kinsey (1972) reported examples of Madison points from the Upper Delaware Valley with lengths ranging from 25-45 mms (mean=35), widths from 24-36 mms (mean=29), and thicknesses from 5-8 mms (mean=6). Coe's (1964) Caraway points, by comparison, were reportedly 20-30 mms in length. The present specimen is small in comparison to the dimensions reported by Scully, Kinsey, and it is on the small end of the range reported by Ritchie.

Projectile Point Fragments (n=16)

Because of their fragmentary nature, the majority of the point fragments recovered at the Kettering Park Site were temporally unclassifiable types. The point fragments were made from five raw material types, although most were from quartz and quartzite (Table 7). Four of the 16 projectile point fragments, however, had attributes that suggested a temporal assignment. One of the points was identified as an Early Archaic point, and three others were identified as Late Archaic forms. The Early Archaic point was a distal fragment, made of quartz, and had two serrated blade edges. The three Late Archaic points were made of quartz, quartzite, and rhyolite.

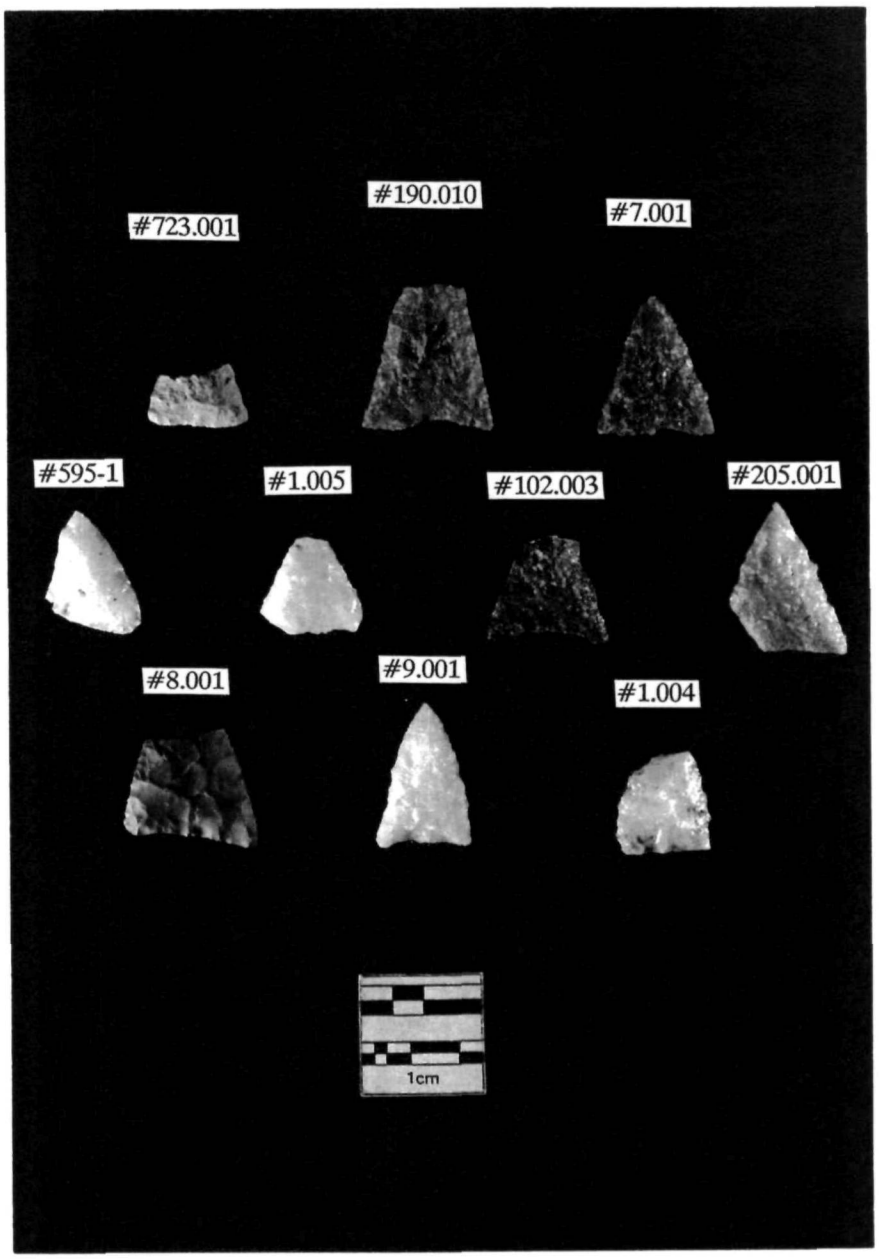

Source: Engineering-Science

Kettering Park Site

Figure 23
Triangular Points

Projectile Point Fragments (n=16)

Table 7: Projectile Point Fragments by Material and Fragment Type

Material	Early Archaic	Late Archaic	Untyped	Totals
Quartz	1	1	4	6
Quartzite		1	3	4
Chert			3	3
Rhyolite		1	1	2
Argillite			1	1
Totals	1	3	12	16

Fragment Type	Early Archaic	Late Archaic	Untyped	Totals
Proximal			5	6
Medial		1	3	4
Distal	1	2	3	5
Unclassifiable			1	1
Totals	1	3	12	16

Bifaces

This section discusses non-projectile point bifaces. Traditionally bifaces are classified according to their stage of manufacture. Ebright (1992:111) has stated, "Non-specifically shaped bifaces may represent blanks for specific bifacial tools, or may have functioned as finished tools without further modification." Ebright further states that there may be functions associated with each stage throughout the tool's use-life. The classification below is based on Ebright's slight modification of the terms as they were defined by Callahan (1979) (his Stage 1 is omitted thus Stage 1 here is equivalent to his Stage 2). Stage 1 is the initial edging stage. Stage 2 is the primary thinning stage, and Stage 3 is secondary thinning.

Stage 1 Bifaces(n=10) (Figure 24)

Ten of the 17 classifiable bifaces were Stage 1 bifaces. The raw materials were six quartz, three quartzite, and one rhyolite. Of these, six had thinning failures, two had perverse fractures, and two had material flaws. The high percentage of thinning failure (60%) can clearly be seen in the low width/thickness ratios. All of the bifaces with thinning failure errors had a width/thickness ratio that clustered around 2.0, and a third of these (n=2) were between 1.5 and 2.0. Half (n=5) of the Stage 1 biface specimens in this collection contained remnant cortex: one of these had cortical remains on both its base and tip, two others were made on bipolar flakes or cores. All were made of quartz. One of the quartz Stage 1 bifaces may have been an exhausted core. One of the quartzite bifaces appeared to be narrow-bladed. The rhyolite Stage 1 biface appeared to be a large quarry blank; it bore evidence of thinning failure and a perverse fracture, the latter possibly resulting from attempts to remove stacks.

Stage 2 Bifaces (n=6) (Figure 24)

The Stage 2 bifaces consisted of three quartz and three quartzite specimens. The width/thickness ratios for quartzite bifaces were slightly higher than for the quartz ones. This indicates greater success in thinning quartzite, which may in turn suggest variation in the knapping characteristics of the two lithic materials. Of the three quartz bifaces, two had thinning failures and one had a margin spall. One of the quartz bifaces had a large knot on one edge and a tip that appears to have been utilized; the second was crudely flaked and asymmetrical; and the third was plano-convex in cross-section. Each of the three quartzite Stage 2 bifaces had different combinations of manufacturing errors: one had end shock; another had a material flaw, a perverse fracture, and thinning failure; and the third had both a perverse fracture and thinning failure. One of these quartzite bifaces had a possible area of polish on one end. Two of the bifaces were trianguloid, and four were ovoid.

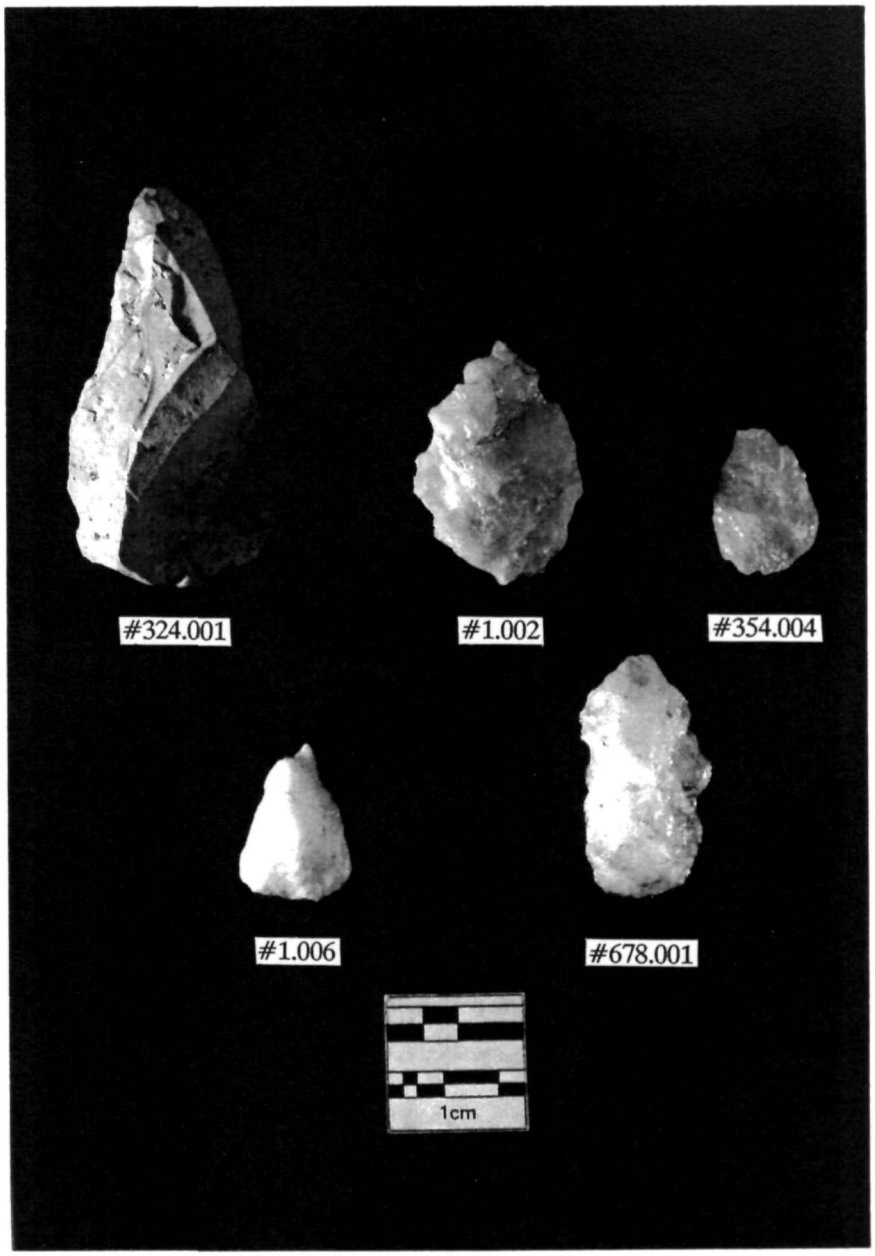

Source: Engineering-Science

Kettering Park Site

Figure 24
Stage 1 and
Stage 2 Bifaces

Stage 3 Biface (n=1) (Figure 25)

Figure 25: Stage 3 Biface

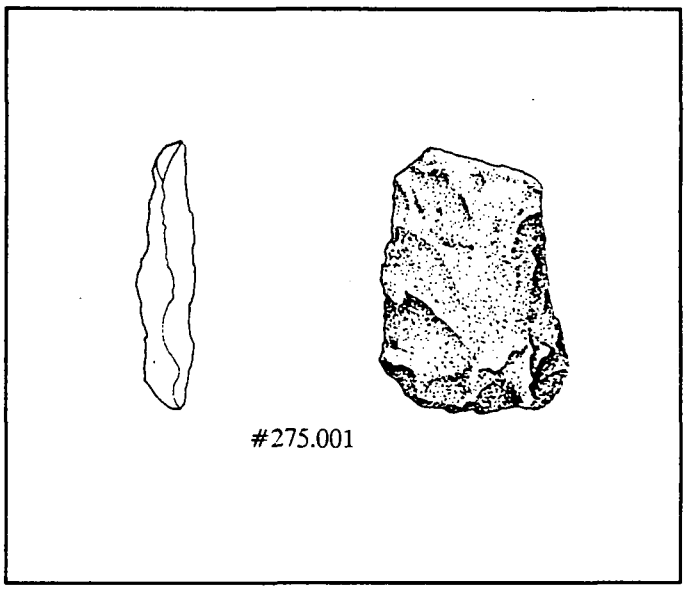

Drawn to Scale

The Stage 3 quartzite biface appears to have been used as a bipolar core after biface reduction. It had some unusual flake scarring, indicating that it was struck from the side and a large traverse flake was removed. This piece was a proximal fragment; its distal edge bore evidence of a perverse fracture. Its base was canted.

Unclassifiable Biface Fragments (n=27)

In total, 27 unidentifiable bifaces were recovered from the Kettering Park Site. Six of these may have been projectile point segments, but they were too fragmentary to state their original form with certainty. In total, 6 fragments were from undetermined parts of a biface, 4 were tip fragments, 5 were base fragments, 2 were mid-section fragments, and the remaining 10 were lateral fragments. Four of the total sample (14.8%) had remnant cortex: three had cortex on one face, and the other had cortex on one end. One of the quartz specimens may have been a bipolar core fragment, possibly used as a scraper. One of the chert specimens was possibly used as a graver.

The primary cause of breakage among the bifaces was material flaws (n=10, 37%). Other bifaces in this group showed evidence of perverse fracture (n=3), reverse hinge fracture

(n=2), margin spalls (n=2), a combination of perverse fracture and thinning failure (n=1), and a combination of material flaw, thinning failure and reverse hinge fracture (n=1). Eight (29.6%) of the bifaces had breaks of undetermined origin.

Unifacial Tools

A total of 34 unifacial tools was recovered. A list of uniface measurements appears in Appendix G. Among the unifacial tools were a graver, end scrapers, a side scraper, unclassified scrapers, and retouched debitage.

Graver (n=1) (Figure 26)

Figure 26: Graver

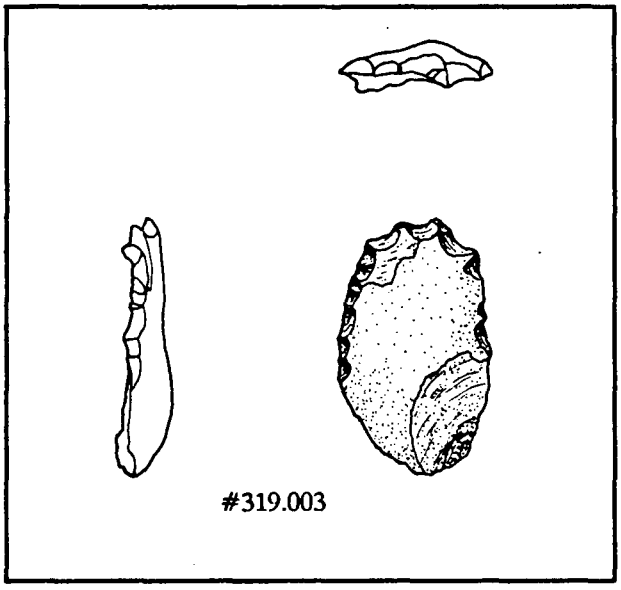

Drawn to Scale

A single graver was recovered from the Kettering Park Site. It was made on a quartz decortication flake in an elongated oval shape. One of the sides of the specimen was finely retouched and one of the ends had four graver spurs. The specimen's width/thickness ratio was 4.2.

End Scrapers (n=3)

All three of the end scrapers recovered from the Kettering Park Site were complete, made of quartz, and contained remnant cortex. One of these tools appears to have been made on a recycled broken hammerstone; a portion of the cortical surface had an area of heavy battering.

This tool was trianguloid in shape. The remaining end scrapers were made on bipolar pebbles and were both oval in shape. The end scrapers ranged in edge angle from between 62 and 78 degrees. Edge angles displayed very little variation, which may imply either that utilization was similar for most of the examples, or that edge angle was not a critical index of use.

Side Scraper (n=1) (Figure 27)

Figure 27: Side Scraper

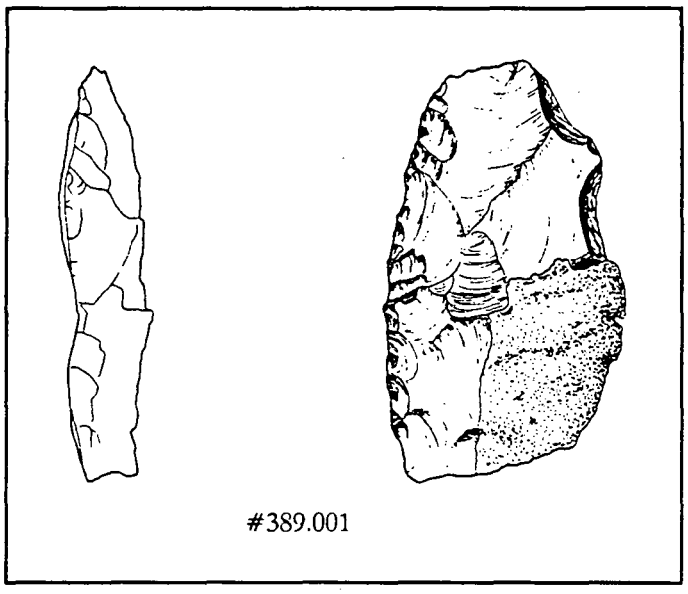

Drawn to Scale

The side scraper was made from a large chert decortication flake. One side was finely retouched and its bit end was straight with two small flakes removed. The edge angle, overall shape, and flake pattern suggest that this specimen was probably used as a knife. This tool was considerably larger than the end scrapers found at the site, and its edge angle was considerably smaller.

Unclassified Scraper Fragments (n=2)

One of the unclassified scraper fragments was made of quartz and had two possible working edges, one convex and the other concave; it is also possible that it may be a core fragment. The other scraper fragment was made on a cobble spall; cortex covered its flat edge.

Retouched Debitage

All of these artifacts were included in the retouched category since they had evidence for unifacial working. The retouched debitage consisted of 21 retouched flakes, 2 chunks, and 4 cores. Most of the retouched debitage were made from chert and quartz (Table 8).

Retouched Flakes (n=21), Chunks (n=2), and Cores (n=4)

Table 8: Retouched Debitage by Material

Type	Quartz	Quartzite	Rhyolite	Chert	Sandstone	Total
Decortication Flake	1			2	1	4
Primary Flake	1		1	4		6
Secondary Flake	3			3		6
Bipolar Flake with Cortex	3	1				4
Chunk		1		1		2
Core	2	2				4
Other Uniface				1		1
Total	10	4	1	11	1	27

Cores

A total of 130 cores was recovered from the Kettering Park Site. A list of core measurements appears in Appendix H. The cores consist of bipolar cores, multifacial flake cores, and unclassifiable core fragments (Table 9, Figure 28). The following discussion is organized by core type. As appropriate, attributions of morphology, exhaustion, platform pairs, and raw material type were examined.

Table 9: Cores by Type and Materials

	Quantity	Frequency
Multifacial Flake Cores		
Quartz	10	7.69%
Chert	2	1.54%
Quartzite	1	0.77%
Type Totals	13	10%
Bipolar Cores		
Quartz	84	64.62%
Chert	1	0.77%
Quartzite	10	7.69%
Igneous Rock	1	0.77%
Type Totals	96	73.85%
Unclassifiable Core Fragments		
Quartz Crystal	1	0.77%
Quartz	8	6.15%
Chert	1	0.77%
Quartzite	11	8.46%
Type Totals	21	16.15%
GRAND TOTAL	130	100%

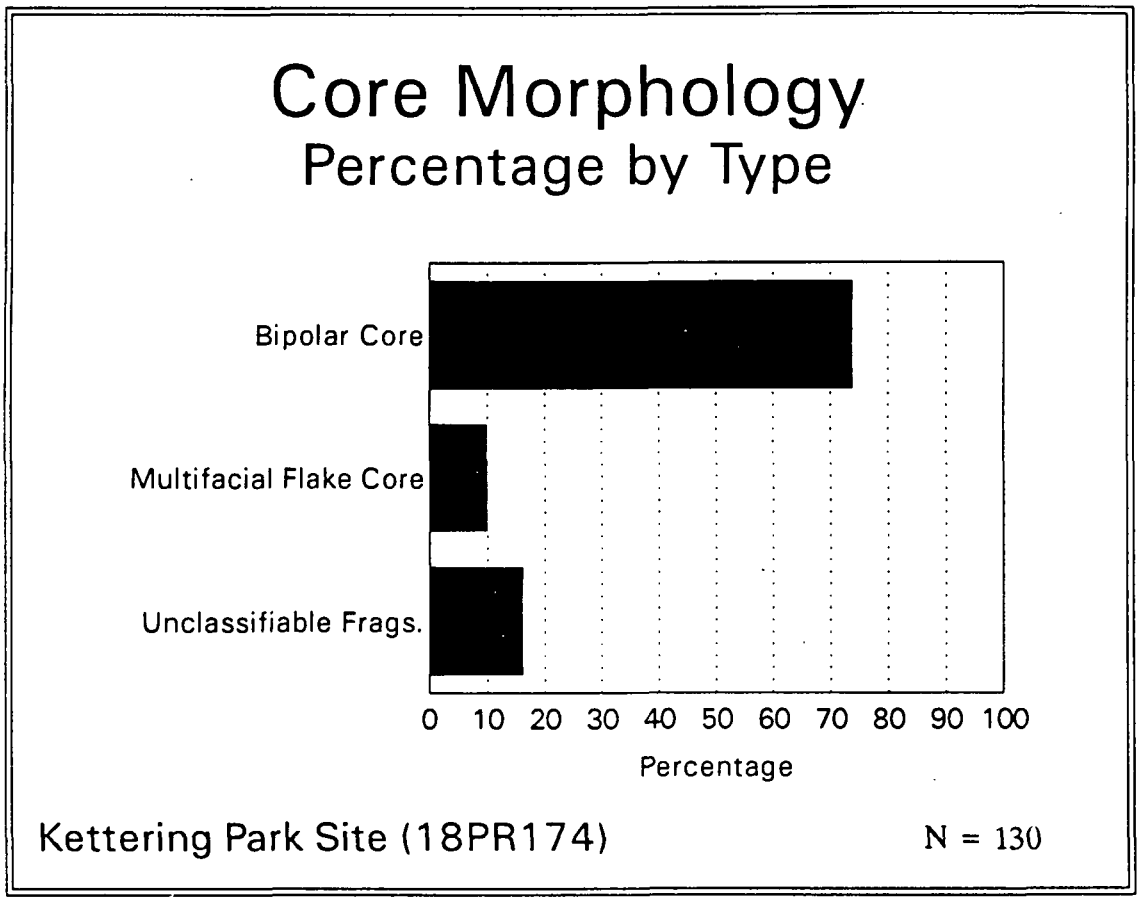

Source: Engineering-Science

Kettering Park Site

Figure 28
Core Morphology,
Frequency by Types

Multifacial Flake Cores: Multifacial flake cores were made of quartz, chert, and quartzite (Figure 29). The weight of the quartz cores of this type ranged from 11-50 gms (mean=27.70; std. dev.=12.36; coef. var.=0.54), and the maximum length ranged from 33-51 mms (mean=39.90; std. dev.=5.82; coef. var.=0.150). The maximum width of these cores ranged from 19-34 mms (mean=29.00; std. dev.=4.8; coef. var.=0.17), and the maximum thickness ranged from 12-24 mms (mean=17.7; std. dev.=3.63; coef. var.=0.21). The single quartzite core recovered weighed 50 gms, had a maximum length of 48 mms, a maximum width of 40 mms, and a maximum thickness of 23 mms. The two chert cores were markedly larger than any other material type: they weighed 82 and 126 gms, measured 65 and 70 mms in maximum length, 39 and 52 mms in maximum width, and 45 and 33 mms in maximum thickness, respectively. Remnant cortex was absent on five (38.5%) of the multifacial flake cores in this collection. Of the remaining eight specimens, one core (7.7%) had bedding plane or tabular cortex, and the other seven (53.8%) had pebble or cobble cortex.

Figure 29: Multifacial Flake Cores by Frequency of Material

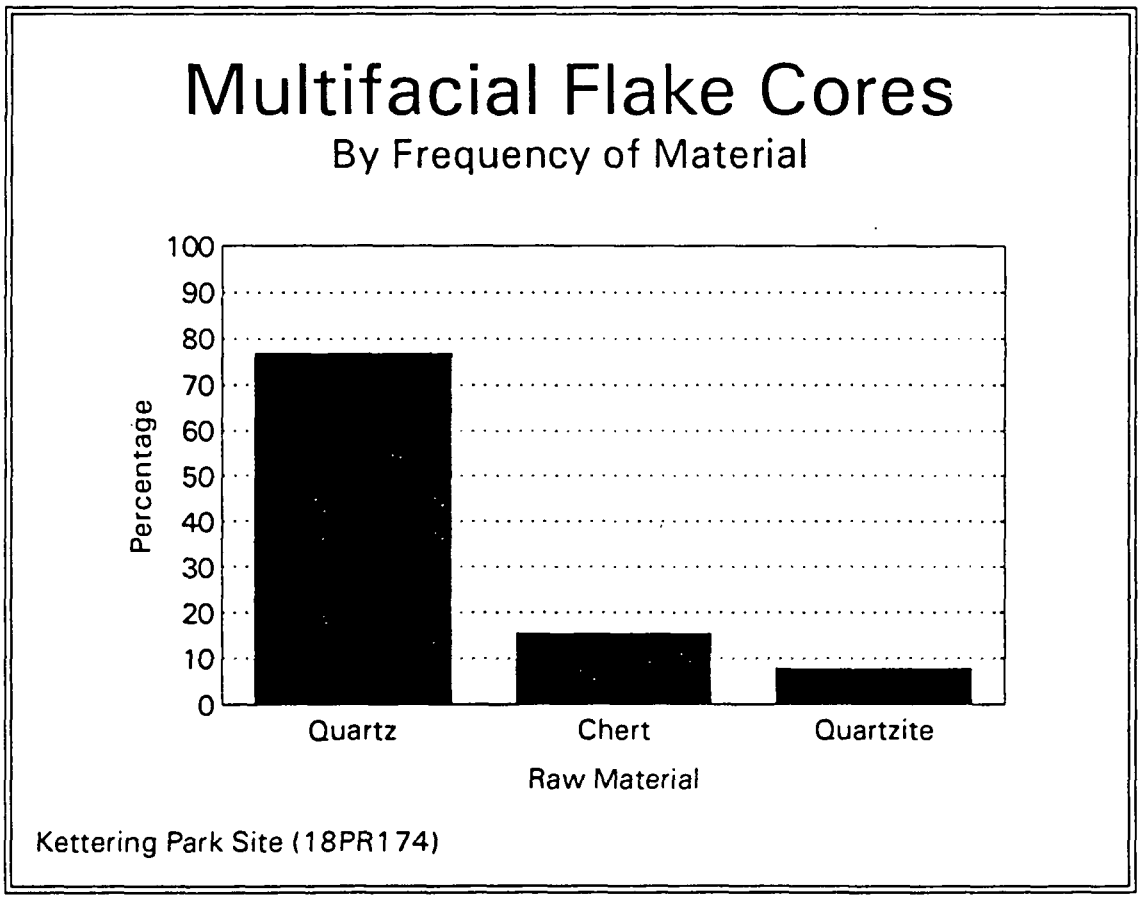

Bipolar Cores: The largest quantity of cores were classified as bipolar cores (Figure 30). Most of the bipolar cores were made of quartz (n=84). The maximum length of quartz bipolar cores ranged from 9-74 mms (mean=26.88; std. dev.=8.99; coef. var.=0.33), maximum width ranged from 7-41 mms (mean=20.68; std. dev.=6.93; coef. var.=0.34), and the maximum thickness ranged from 4-29 mms (mean=11.60; std. dev.=4.56; coef. var.=0.39).

The next most frequently recovered material utilized in bipolar technology was quartzite (n=10). These cores ranged in weight from 2-33 gms (mean=10.20; std. dev.=8.83; coef. var.=0.87), in length from 14-45 mms (mean=32.2; std. dev. 12.63; coef. var.=20.39), and in maximum width from 12-34 mms (mean=20.9; std. dev. 6.27; coef. var.=0.30). The maximum thickness of quartzite cores ranged from 7-24 mms (mean=12.6; std. dev.=4.8; coef. var.=0.38).

Most of the bipolar cores had one set of platform pairs (n=44, 46%) indicating that the cores had been struck along a single axis. Of these cores, 38 were quartz, 1 was chert, 4 were quartzite, and 1 was of an undetermined igneous material. A total of 39 bipolar cores (40.6%) had two platform pairs, indicating flaking along two, often perpendicular axes; 35 were quartz, 4 were quartzite. Ten quartz core and one quartzite core each had three platform pairs (11.5%), and one quartz and one quartzite artifact each had four platform pairs (2.1%).

Cortex was absent on 31 of the bipolar cores. Of these, 29 were quartz, 1 was chert, and the other was quartzite. Four of the remaining bipolar cores had bedding plane or tabular remnant cortex, and the other 61 had remnant cortex of the pebble or cobble type.

Bipolar reduction had been cited as typical of cobble/core technology (Stewart 1987), the hammer and anvil technique being the easiest for setting up platforms on small, rounded pieces. Most of the cores and core fragments from the Kettering Park Site were in fact, small, apparently derived from secondary deposits of quartz and quartzite in the nearby stream, and most bore cobble cortex.

There were few prepared cores in the collection from the site. Most consisted of what have been referred to as expedient cores (Stewart 1987), in which irregularly shaped flakes were struck for immediate and short-term use. Expedient core/flake production is often associated with proximity to lithic sources. Easy access to a large amount of raw material in local stream beds suggests that this pattern was valid at the Kettering Park Site. Further indication of this quick and relatively efficient production of flake tools is seen in the high frequency of multiple

bipolar platform pairs, suggesting that bipolar flaking was not used solely to split pebbles and cobbles, but also to reduce cores, in some cases, to exhaustion. The small sizes of the initial pebbles, producing small cores, may have also dictated the use of bipolar flaking for continued reduction.

Lithic Debitage

Lithic debitage, with the exception of cores, was summarized in Table 2. In order of number represented, the highest debitage types were secondary flakes (n=1259), lithic chunks (n=1244), decortication flakes (n=583), primary flakes (n=475), and tertiary flakes (n=388). The lithic debitage was summarized by material type (Figure 31). Quartz was the most commonly found material followed by quartzite, chert, and rhyolite in declining order of quantity. Four other types of raw material and an undetermined type was represented, but these made up only a small percentage of the total.

The lithic debitage for the four most commonly occurring raw materials (i.e., quartz, quartzite, chert, and rhyolite) was summarized by four morphological types (i.e., Decortication Flakes, Primary Flakes, Secondary Flakes, Tertiary Flakes) (Figure 32). The information indicated that all stages of manufacture were represented at the site, from the procurement of material to the final finishing. The summaries also indicated that some trends were expressed in the data. A high percentage of Decortication Flakes were made of quartz. Conversely, chert, rhyolite, and quartzite were better represented in the Secondary stage category. This trend is reflective of the fact that quartz was locally available, and may have been reduced on the spot, whereas chert and rhyolite was procured from more distant sources, and therefore consisted of higher percentages of reduced material. This information appears to be a potential indicator of the distance and accessibility (whether through trade or travel) of the sources of the lithic materials recovered at the site.

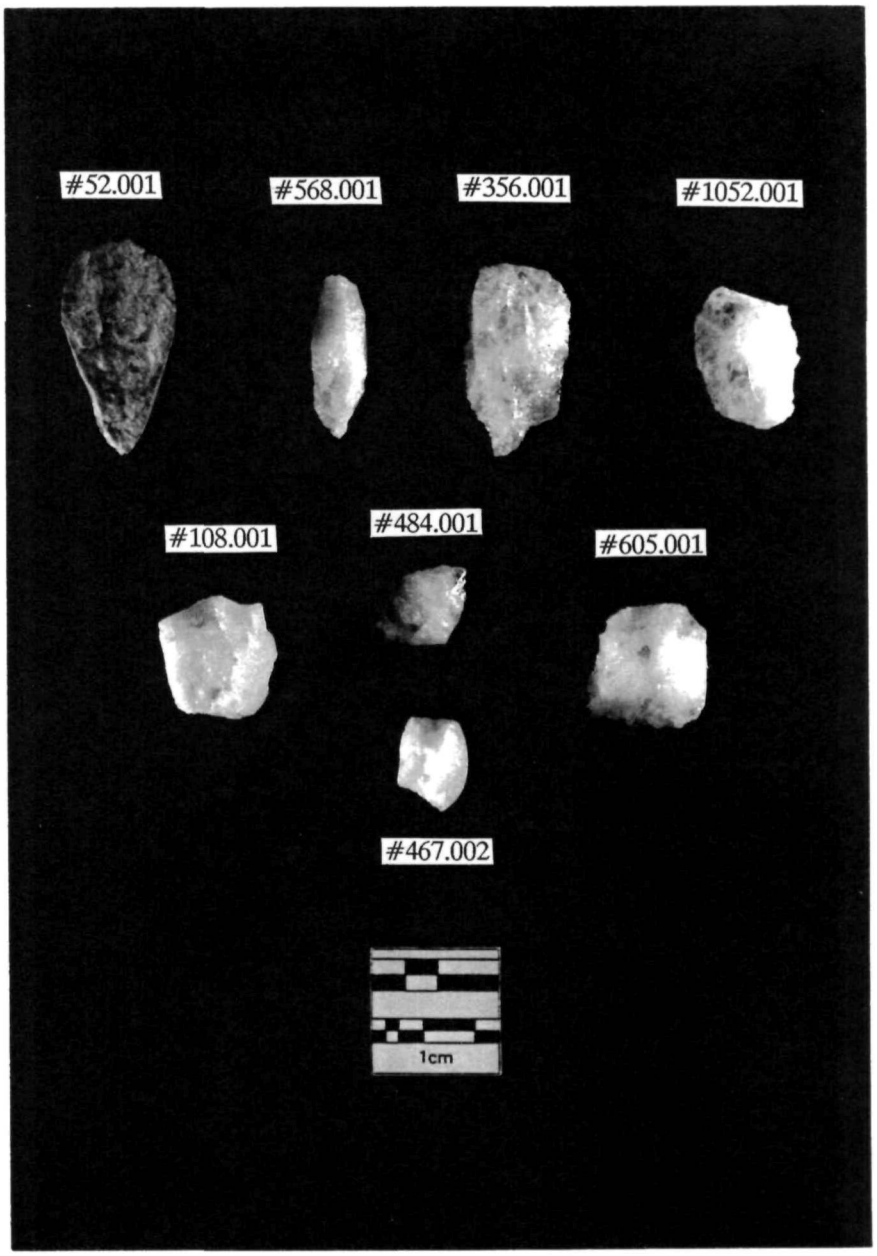

Source: Engineering-Science

Kettering Park Site

Figure 30
A Sample of
Bipolar Cores

Figure 31: Debitage by Material

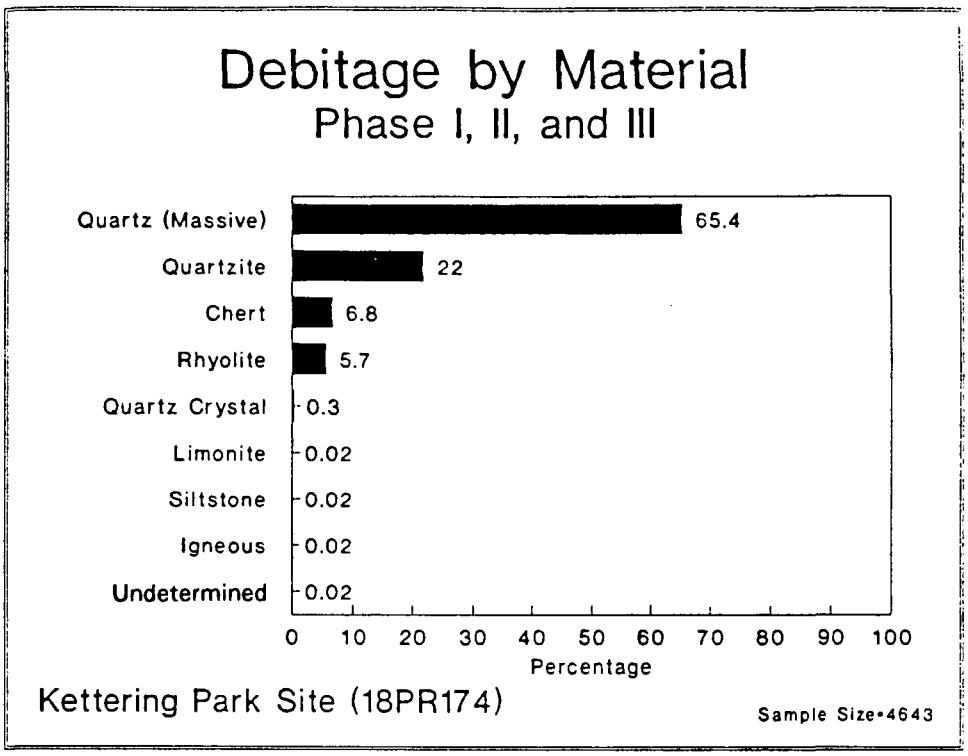

Figure 32: Flake Morphology by Material

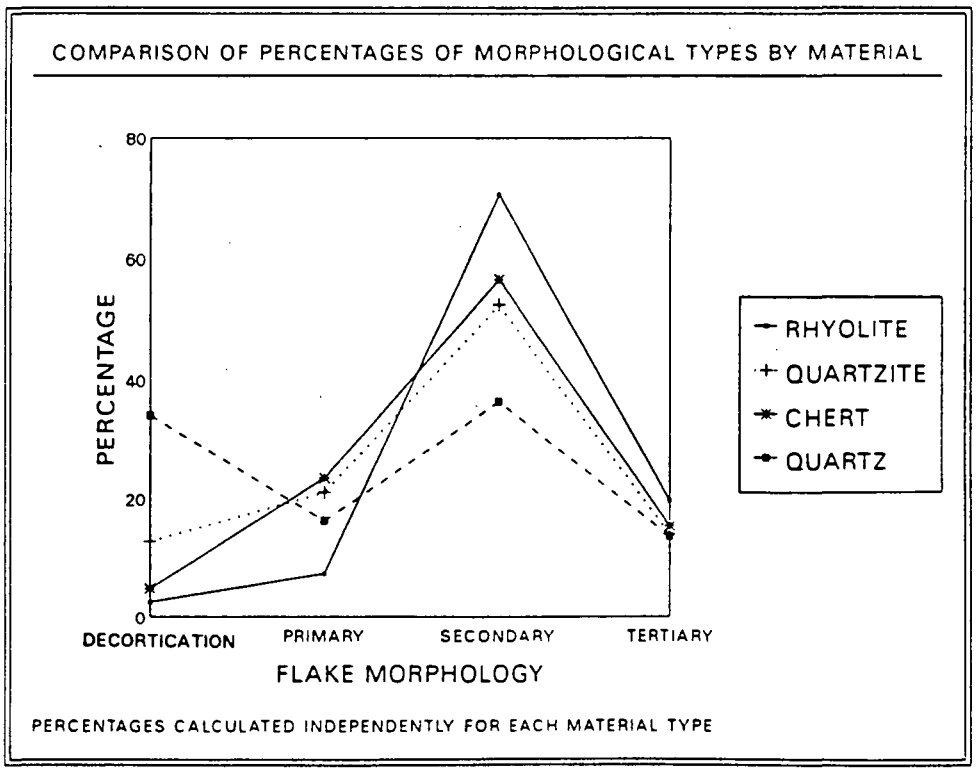

Ground Stone and Use Modified Tools

A full list of ground stone and use modified measurements appears in Appendix I. Two ground stone implements were recovered at the Kettering Park Site. The first was a very small soapstone bowl fragment. The second was a fragment of a siltstone bannerstone (Figure 33). The bannerstone fragment was well made, and had a polished surface and a drilled hole.

Eight lithics classified as use modified stone tools were recovered at the site. All of these were possible edge-battered hammerstones. The total weight of these artifacts was 738 gms (mean=67.09). Of these, four were made of sandstone, and three were made of quartzite, and one was made of greenstone. Four of the sandstone tools were pebbles with roughened surfaces, another was elongated and possibly functioned as a pestle, and another had pronounced battering on one end, and lighter battering on the other side.

Figure 33: Bannerstone Fragment

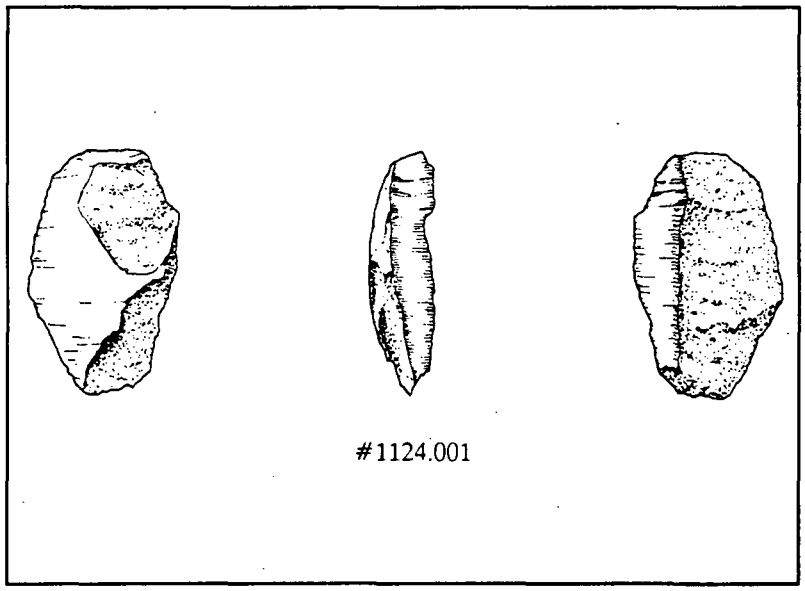

Drawn to Scale

Summary

Excavations at the Kettering Park Site provided evidence of prehistoric occupation from the Early Archaic through the Late Woodland Periods. Based on the quantity of diagnostic material, the most extensive use of the site occurred during the Late Archaic/Early Woodland Period and the second largest occupation was during the Late Woodland Period. While there were Early and Middle Archaic artifacts, the material evidence was minimal. Artifacts dating to the Middle Woodland Period were limited to 11 ceramic fragments, which probably indicates a minimal usage of the site during that time.

The abundance of cores, both bipolar and multifacial flake types, and other lithic debitage (e.g., Lithic Chunks, Decortication Falkes, Primary Flakes, Secondary Flakes), suggested that substantial lithic tool manufacture occurred at the site. Although no features were located, the relative abundance of Early Woodland and Late Woodland Period ceramics indicates that the site may have functioned as a semi-sedentary locale.

VIII. RESIDUE ANALYSIS

Camille Juliana used the Chemstrip Test Method to determine the presence or absence of hemoglobin on 10 lithic artifacts recovered during the Phase II testing at the Kettering Park Site. Five projectile points and five non-point artifacts were selected to test a range of lithic artifact types for possible residue. The main criterion for tool selection was the presence of use-related minor breakage. This criterion eliminated the possibility that the tools selected, for whatever reason, had not been utilized (thereby not having been exposed to tissue and blood).

Methodology

The following is Camille Juliana's description of the methodology she employed for the blood residue analysis.

> The artifacts are soaked individually in vials in water solutions. The hemoglobin, as a salt, dissolves into this solution. The solutions are tested after the first and third days, with color-changing paper coated plastic strips sensitive to the presence of hemoglobin. Even minute traces of hemoglobin, if present, will be indicated by a slight change of color.
>
> The second phase of the technique is to put any remaining hemoglobin into solution. This involves subjecting each vial to a sonic vibrator, which agitates the solution and frees the tool of any remaining residue. Of course, all sediment is suspended in solution as well, which produces a false positive reaction, presumably due to the interfering actions of fine particulates such as clay. Therefore, to eliminate the suspended sediment, it is allowed to settle out for two weeks, then the remaining clear solution is tested. The purpose of this phase is to maximize potential hemoglobin by removing all of it from the tool surfaces and placing it into solution. Additionally, it allows the tool to be removed, cleaned, and available for further analysis.

It was reported that the presence of contaminant, particularly manganese oxide, in the soil matrix could contaminate the results and register a "false positive" (Custer *et al.* 1988:100). Samples from the Kettering Park Site were tested, and manganese oxide contamination was absent. Consequently the following results for the presence of blood residues on 10 lithic artifacts from the Kettering Park Site are believed to be reliable.

Results

Of the 10 artifacts tested, only 1 (or 10%) showed a positive result; 7 were negative (70%), and 2 were possible (20%). A Piscataway projectile point with a chipped tip tested positive; all other projectile points tested negative. Only flakes tested possible for the presence of blood residues; the remaining lithic artifacts tested negative. According to Juliana the results of "probable" and "possible" reflect weak positive reactions that were verified through repeated testing of the solution."

These results indicate that it is probable that both formal and expedient tools were used for killing and butchering animals at the Kettering Park Site. Given the small sample and the fact that only one of the objects tested positive, these results are to be considered preliminary. No further testing for blood residue were conducted for either Phase II or Phase III lithics recovered because this study was mostly an experiment with use of the technique. It was the first of its type undertaken by the State Highway Administration. Among its primary goal was to determine whether the analysis of blood residues was a fruitful research endeavor. Juliana felt that the results indicated that blood residue analysis had potential as an analytical tool.

IX. SITE INTEGRITY AND SPATIAL ANALYSES

Site Integrity

As the excavation profiles indicated three main horizons were identified: 1) an uppermost A1 horizon, consisting of a humus and a mix of plowzone and alluvial and sheetwash deposits; 2) an A2 horizon, which consisted of subplowzone deposits, and inferred to be relatively intact; and 3) a lowermost, ancient B horizon, which did not contain artifacts (see Chapter V, "Pedology and Stratigraphy"). To further document the stratigraphic information and support interpretations about depositional disturbance and integrity, temporally diagnostic projectile points and ceramics were summarized by excavation unit and horizon (Table 10). Table 10 demonstrates that certain information could be derived by examining temporal diagnostics by horizon.

The plowzone and sheetwash layer, or the A1 horizon, clearly contained an undifferentiated mixture of Archaic and Woodland materials, indicative of postdepositional alteration. The A1 horizon may represent a mix of redeposited Archaic material and Woodland material upheaved from the underlying A2 horizon. The A1 horizon contained projectile points of the Middle Archaic (two Normanskill), the Late Archaic/Early Woodland (two Vernon, three Piscataway, one Calvert), and the Late Archaic (one Untyped Straight-Stemmed, one Bare Island). With the exception of the deeply lying Early Archaic projectile point fragment in N115/W105, Archaic projectile points were not found in the A2 horizon. This suggested the possibility that the Middle to Late Archaic artifacts may have been redeposited by alluvial or sheetwash processes. Derivation of the Middle to Late Archaic materials from underlying deposits is considered unlikely because of the inferred intact position of Woodland materials in the A2 horizon.

In addition to redeposited material, the A1 horizon appears to represent Woodland material upheaved by plowing from underlying deposits. Given that virtually all of the excavation units contained Accokeek sherds in the A1 and A2 horizons, it is probable that the original top of the Accokeek component was at a higher elevation than the current top of the A2 horizon. This inference is supported by the fact that the Late Woodland artifacts were confined to the A1 horizon.

While the A1 horizon represents a plowzone deposit, certain spatial patterns suggested remnants of activity zones remained. For example, a spatially delimited pattern of chert material

was identified in the A1 horizon of Unit N115/W105. Identification of spatial patterns indicated areas of relative integrity, and suggested activity zones could be inferred.

Based on the stratigraphic profiles and the position of the temporal diagnostics, the A2 horizon is considered to be a relatively intact deposit. Indicative of vertical integrity, no historical materials were found in the A2 horizon. Moreover, except for a single possible Townsend sherd in N124/W110, no Late Woodland artifacts were found in the A2 horizon. The Early Archaic projectile point was located at the bottom of Unit N115/W104, at the interface between the A2 horizon and the sterile zone that marked the stratigraphic integrity of this unit. Diagnostic materials from the A2 horizon primarily consisted of Early Woodland ceramics and Late Archaic/Early Woodland projectile points. While the A2 horizon appears to be relatively intact, vertical, postdepositional intrusions were likely. Field observations suggested some degree of bioturbation, and potential mixture by burrowing animals and roots. Confirming these observations, a single Middle to Late Archaic Brewerton Ear-Notched point and a single Late Archaic Untyped Straight-Stemmed point was found in the A2 horizon.

Spatial Distributions

For distribution analyses, the materials recovered from the STPs from the test and excavated units were separated, and results compared within and between different artifact classes. Artifact clusters maps were produced using the Surfer software program. In order to provide accurate maps, the data from the STPs were mapped independently. The independent mapping was mandated because of the size disparity between the STPs and the test and excavated units, and the relative lack of stratigraphic controls within the STPs. As previously stated, the Phase III excavated units (measuring two-meters square) were excavated as four 1x1 m contiguous units. This field methodology provided a database that was compatible with the Phase II test units for the purposes of computer-generated mapping.

The absence of features at the site mandated developing a research strategy that would address basic questions of whether artifact patterning was apparent in the horizontal distribution of the data. Graphic images that displayed the data clustered by material and level were produced using Surfer. Spatial distribution maps were made of major artifact classes. The anticipated result was that spatial patterns, potentially indicative of activity areas, could be detected. The following sections provide descriptions of specific debitage and maps, which indicate the location of quartz, quartzite, rhyolite, and chert debitage. The debitage category, as used here, includes all classes with the exception of cores and bipolar material. The following sections summarize the spatial distributions for ceramics, fire-cracked rock, and projectile points.

Table 10: Diagnostics Recovered From Excavations By Horizon

Excavation Unit	Temporal Diagnostics	A1 Horizon	A2 Horizon
N162/W138	Accokeek Cord-Marked Sherd		1
	Early Woodland Sherd		1
	Shepard Ware Sherd	1	
N142/W115	Accokeek Coarseware Sherd		1
	Untyped Early Woodland Sherd	1	
	Townsend Sherd	3	
	Moyaone Sherd	1	
N137/W101	Accokeek Coarseware Sherd		2
	Early Woodland Sherd	1	
	Mockley Sherd	1	
	Potomac Creek Sherd	3	
N132/W116	Accokeek Cord-Marked Sherd	1	3
	Accokeek Coarseware Sherd	5	4
	Untyped Early Woodland Sherd	6	5
	Townsend Sherd	1	
	Potomac Creek Sherd	1	
	Untyped Late Archaic Point	1	
	Late Woodland Elongate Point	1	
N130/W75	Accokeek Coarseware Sherd	1	1
N126.5/W120.5	Accokeek Cord-Marked Sherd	2	1
	Accokeek Coarseware Sherd	2	
	Untyped Early Woodland Sherd	1	
	Townsend Sherd	3	
	Untyped Late Archaic Point		1
N118/W110	Accokeek Cord-Marked Sherd	1	5
	Accokeek Coarseware Sherd	3	1
	Untyped Early Woodland Sherd	3	2
	Townsend Sherd	3	
	Fabric Impressed Late Woodland Sherd	1	

Excavation Unit	Temporal Diagnostics	A1 Horizon	A2 Horizon
N115/W109	Accokeek Cord-Marked Sherd	2	8
	Untyped Early Woodland Sherd	4	3
	Accokeek Coarseware Sherd		3
N115/W105	Accokeek Cord-Marked Sherd	1	
	Accokeek Coarseware Sherd	1	1
	Mockley Sherd	1	
	Potomac Creek Sherd	1	
	Untyped Early Archaic Point		1
N87/W115	Accokeek Coarseware Sherd	7	2
	Accokeek Mica-Tempered Sherd	46	1
	Townsend Sherd	1	
	Moyaone Sherd	1	
	Potomac Creek Sherd	1	
	Normanskill Point	1	
	Vernon Point	1	
N87/W116	Accokeek Sherd	1	1
	Townsend Sherd	1	
	Potomac Creek Sherd	2	
	Normanskill Point	1	
	Levanna Point	1	
N86/W116	Accokeek Sherd	1	
	Accokeek Coarseware Sherd	2	
	Piscataway Point	1	
N134/W112	Accokeek Cord-Marked Sherd	11	
	Accokeek Coarseware Sherd	1	
	Untyped Early Woodland Sherd	2	
	Townsend Sherd	2	
	Moyaone Incised Sherd	1	
N130/W110	Accokeek Cord-Marked Sherd	5	2
	Accokeek Coarseware Sherd	4	1
	Townsend Sherd	2	

Excavation Unit	Temporal Diagnostics	A1 Horizon	A2 Horizon
N130/W110	Vernon Point	1	1
N130/W96	Accokeek Cord-Marked Sherd	5	
	Mockley Net Impressed Sherd	1	
	Townsend Sherd	2	
	Susquehanna Broadspear Point	1	
N126/W102	Accokeek Cord-Marked Sherd		9
	Accokeek Coarseware Sherd	5	3
N124/W116	Accokeek Cord-Marked Sherd	4	
	Accokeek Coarseware Sherd	1	
	Levanna Point	1	
N124/W110	Accokeek Cord-Marked Sherd	6	1
	Accokeek Coarseware Sherd		1
	Mockley Sherd	4	
	Mockley Net-Impressed Sherd	1	
	Townsend Sherd	2	
	Possible Townsend Sherd		1
N118/W112	Accokeek Cord-Marked Sherd	16	2
	Accokeek Coarseware Sherd		1
	Untyped Early Woodland Sherd	1	
	Mockley Sherd	3	
	Piscataway Point	1	
N118/W100	Accokeek Cord-Marked Sherd	36	8
	Accokeek Coarseware Sherd	2	1
	Untyped Early Woodland Sherd	2	2
	Mockley Sherd	1	
	Piscataway Point	1	
	Potts Corner-Notched Point	1	
	Vernon Point	1	
	Madison Point	1	

Excavation Unit	Temporal Diagnostics	A1 Horizon	A2 Horizon
N116/W108	Accokeek Cord-Marked Sherd	1	1
	Accokeek Coarseware Sherd	1	
	Untyped Early Woodland Sherd	5	1
	Mockley Sherd	1	
	Townsend Sherd	2	1
	Untyped Late Archaic Straight-Stemmed Point	1	
	Calvert Point	1	
N112/W112	Accokeek Cord-Marked Sherd	53	3
	Untyped Early Woodland Sherd	23	
	Townsend Sherd	2	
	Untyped Late Archaic Straight-Stemmed Point		1
	Piscataway Point	1	1
N112/W108	Accokeek Cord-Marked Sherd	14	6
	Untyped Early Woodland Sherd	4	9
	Selden Island Sherd		1
	Brewerton Ear-Notched Point		1
N110/W110	Accokeek Cord-Marked	42	16
	Untyped Early Woodland Sherd	31	23
	Riggins Sherd	1	
N108/W98	Accokeek Cord-Marked Sherd	6	6
	Untyped Early Woodland Sherd	7	3
	Bare Island Point	1	
	Piscataway Point		1

Quartz Debitage

Quartz is the most common material found at the site. Figure 34 shows the quartz debitage distribution from the STPs, and Figure 35 shows the quartz debitage distribution from the excavated units. Figure 34 identifies the density of quartz debitage in the northeastern area of the block. The disparity between the peak areas present on Figure 34 and the excavations displayed in Figure 35 indicates that the excavation was not geared towards the shovel tests with the highest concentration of quartz debitage (in fact, excavations were geared towards the

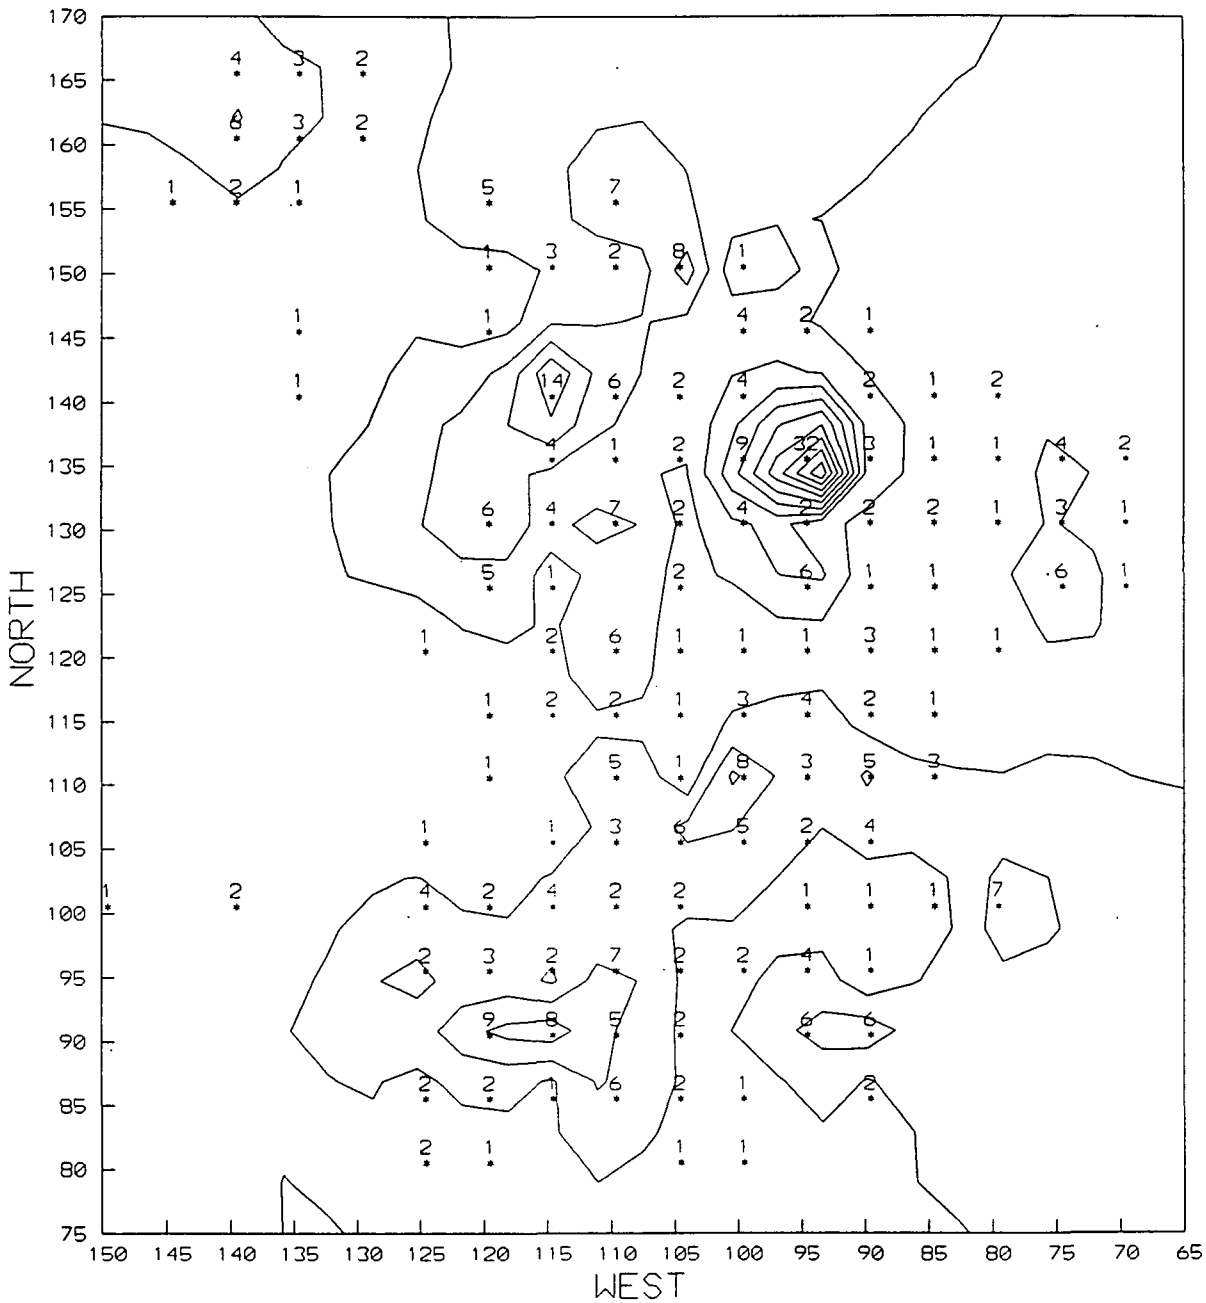

CONTOUR INTERVAL = 2

Source: Engineering-Science

Kettering Park Site

Figure 34
Quartz Debitage
Distribution from STPs

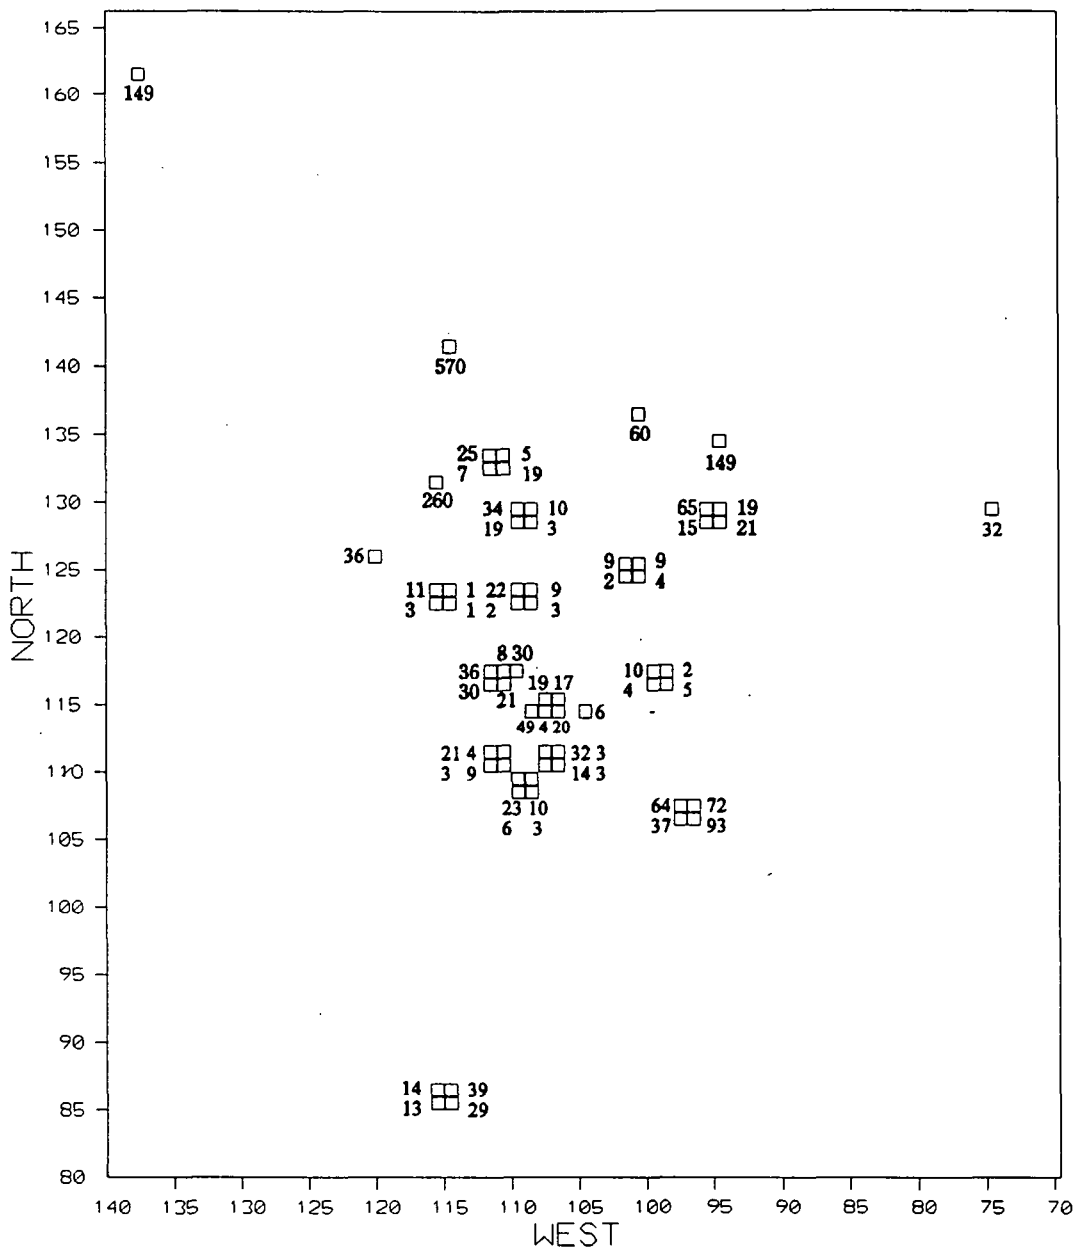

No Bipolar Material Included

Source: Engineering Science

Figure 35
Quartz Debitage
Distribution from Units

ceramics recovery). Despite this fact, the distribution maps show that high concentrations of quartz debitage were found in excavated units. The data indicates that quartz tool manufacture was a relatively important and frequent activity in this location. The quartz debitage count in the plowzone totaled 926, and the sub-plowzone (A2 horizon) had 1628 pieces of quartz debitage. The greater number of flakes in the A2 horizon correlates with the generally higher quantity of most artifact classes in this stratum.

Quartzite Debitage

Quartzite was the second most commonly found lithic material at the site. In total, 998 pieces of quartzite debitage were recovered at the site; 821 of these were from the test and excavated units. A total of 504 fragments was from the A2 horizon, constituting 61.4% of the sample from the units. Although the presence of 60 pieces of debitage in N124/W110 was not evident from the STP results, all other areas of high quartzite debitage concentrations were consistent with the predicted results based on the STP data. The percentage of quartzite decortication flakes in relation to flakes produced by the later stages of manufacture indicates that quartzite may have been imported from non-local sources. The relative abundance of this material, compared to chert and rhyolite, suggests that its sources were located closer to the site, perhaps farther up one of the stream branches.

Rhyolite Debitage

The STP data on rhyolite debitage showed that it occurred in very small amounts over most site areas. Very small clusters appeared on the northern and western edges of the study area. It was also present in the northeast area, where N162/W138 was located, as well as on the site's western edge. However, six was the largest number of flakes found in an STP. A larger number of flakes were found in both the test and excavation units, but 76 of these were from the plowzone (5.1% of the debitage recovered from the mixed A1 horizon) and 125 were from the A2 horizon (5.35% of the lithic debitage recovered) (Figures 36 and 37). Five of the seven rhyolite bifaces recovered from the A1 horizon were diagnostic projectile points that date from the Archaic to the Early Woodland Period (Figure 38). One of the remaining two bifaces was a Late Woodland Madison and the other was of questionable date. The highest concentrations of rhyolite debitage were located in the same units within which the Pre- Late Woodland Period diagnostic points were located. The highest concentration of debitage was always in the A2 horizon within these units. The areas where rhyolite was present in the A1

horizon generally appears more scattered, with an odd flake here or there when no early period diagnostic were present. This type of scattering may be attributed to postdepositional forces. The only unique concentration of rhyolite flakes in the A1 horizon occurred in N126.5/W120.5 where six flakes were located. In summary, the spatial analysis of the rhyolite debitage suggests that the presence of a relatively large sample of debitage in the A1 horizon may, to a great degree, be a product of postdepositional activities. The overall distribution of diagnostics and debitage indicates that the use of this material may have been more frequent during the Archaic and the Early Woodland Periods.

Chert Debitage

The A1 horizon contained the majority of the chert debitage, including 152 flakes and chunks (Figure 39). The A2 horizon only had 68 pieces, 44 of which were located in the level immediately below the plowzone (level 3 in all units). Upper level chert flakes cluster in the south central part of the study area. Cherts were examined by color and quantity. The most prevalent color was dark mustard yellow, and black cherts were the second most commonly found color. However, the quantities of black chert were too low to merit further spatial study.

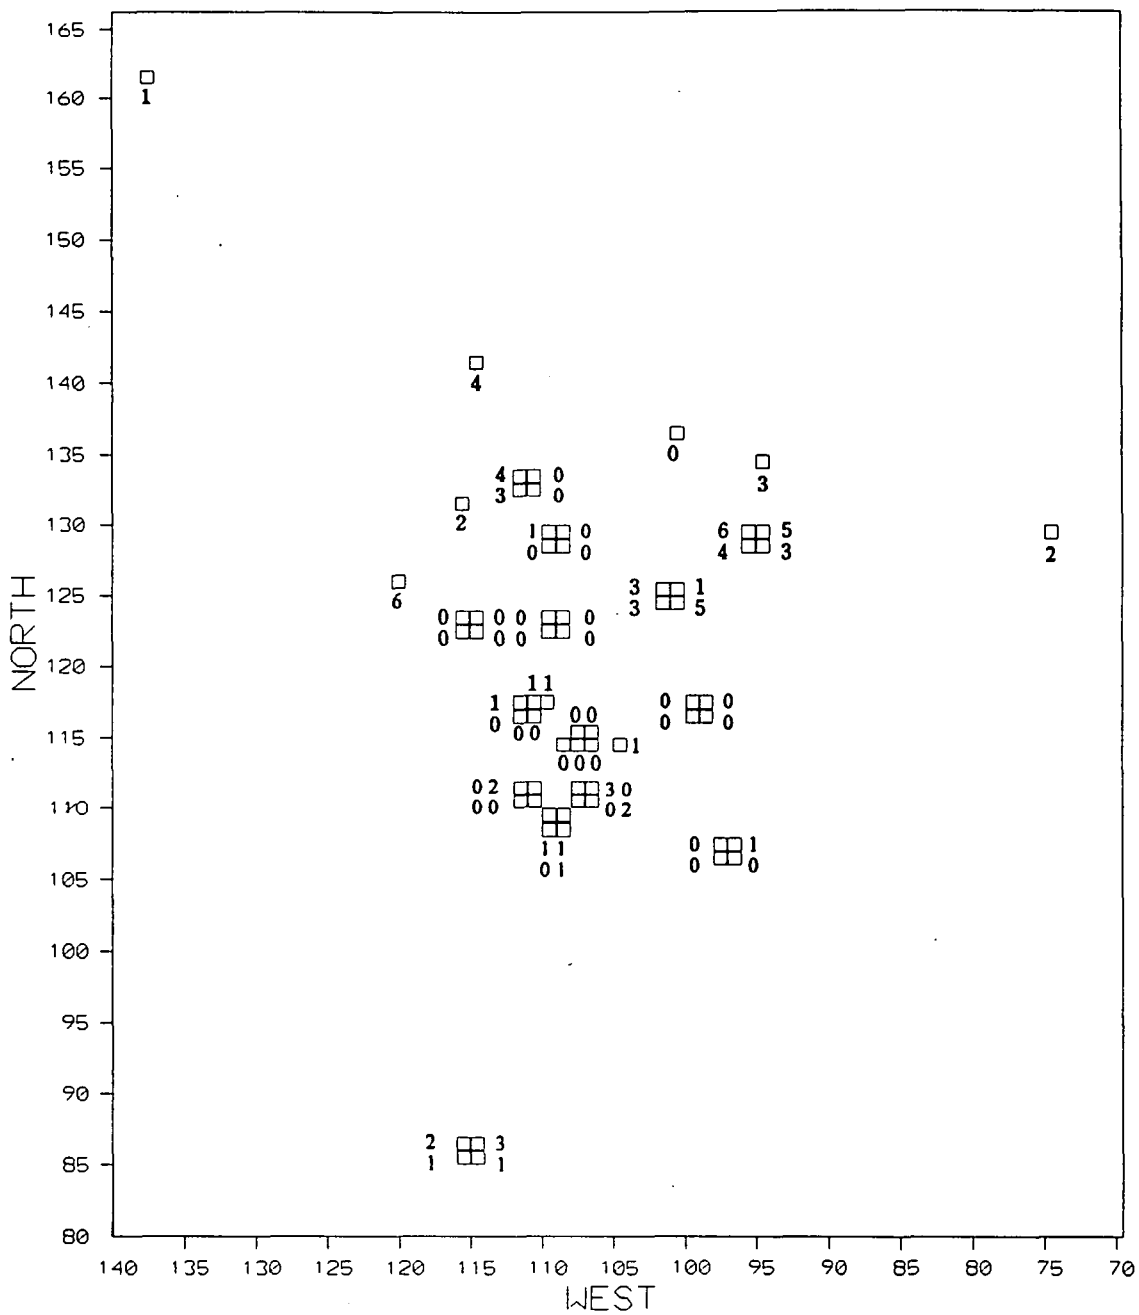

Source: Engineering Science

Figure 36
Rhyolite Debitage
from the A1 Horizon

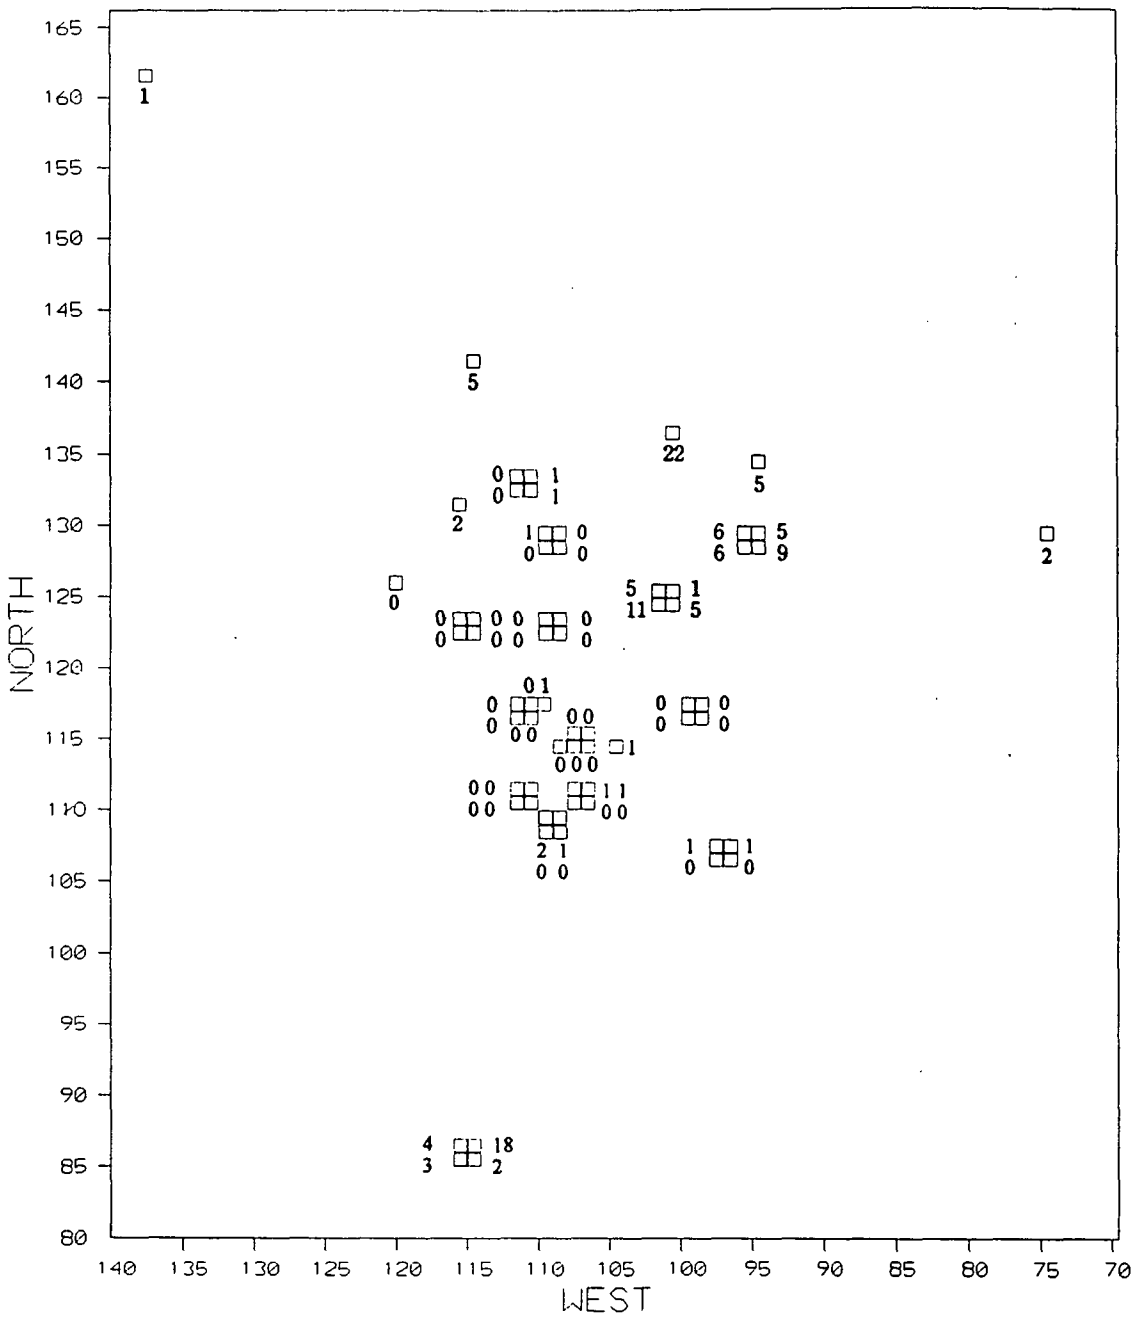

Source: Engineering Science

Figure 37
Rhyolite Debitage
from the A2 Horizon

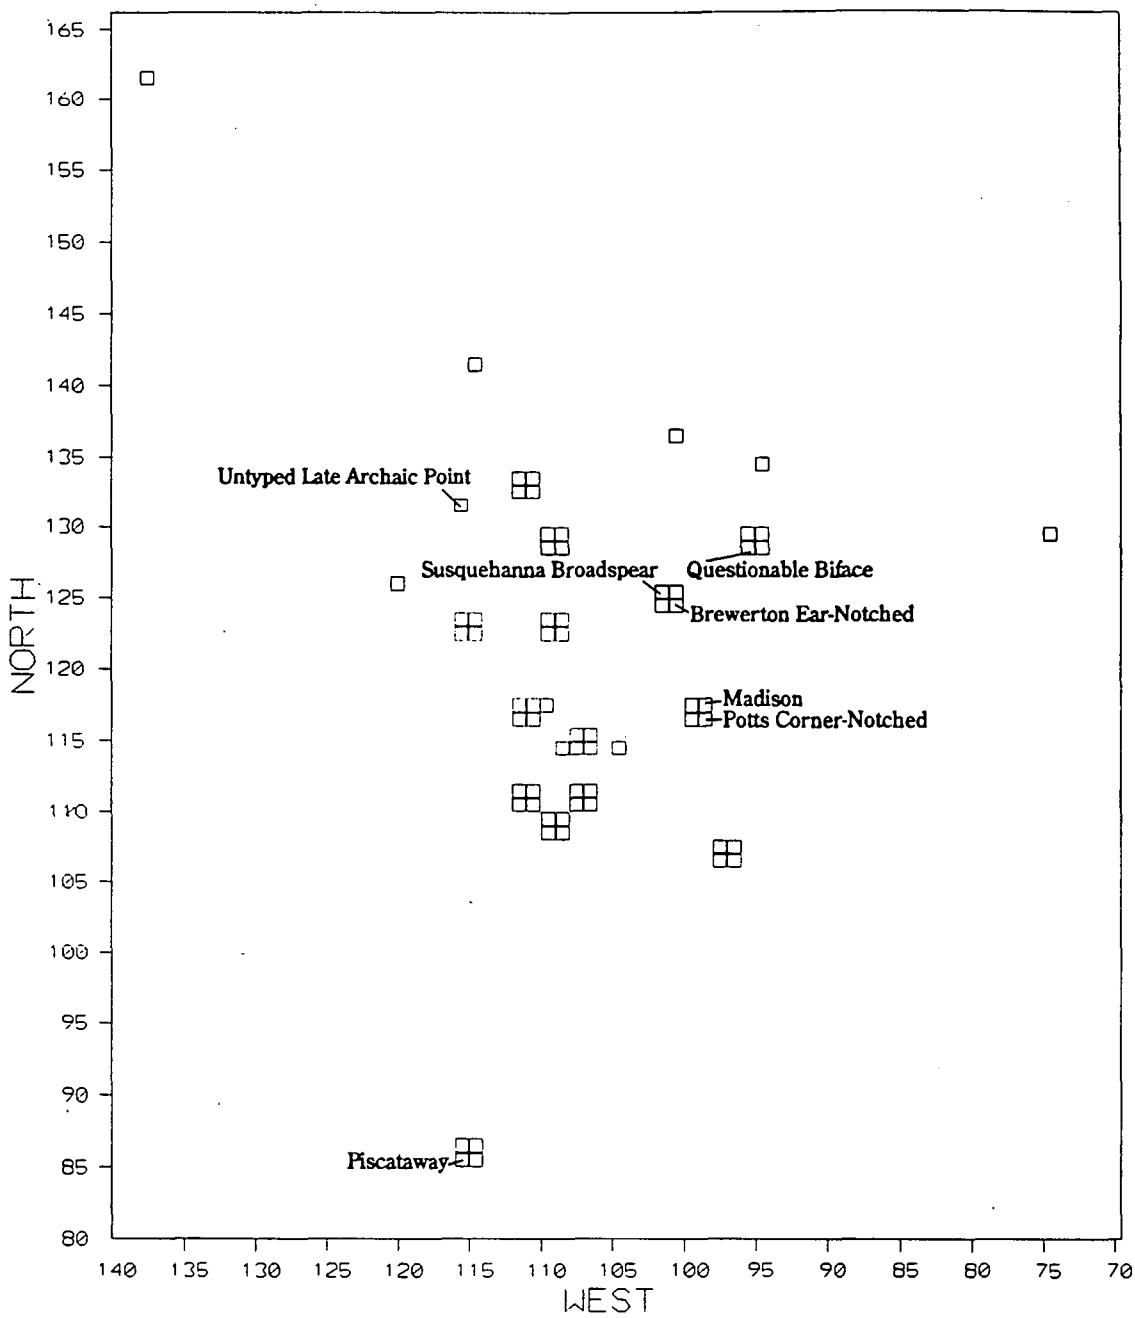

Source: Engineering Science

Figure 38
Rhyolite Bifaces
from the A1 Horizon

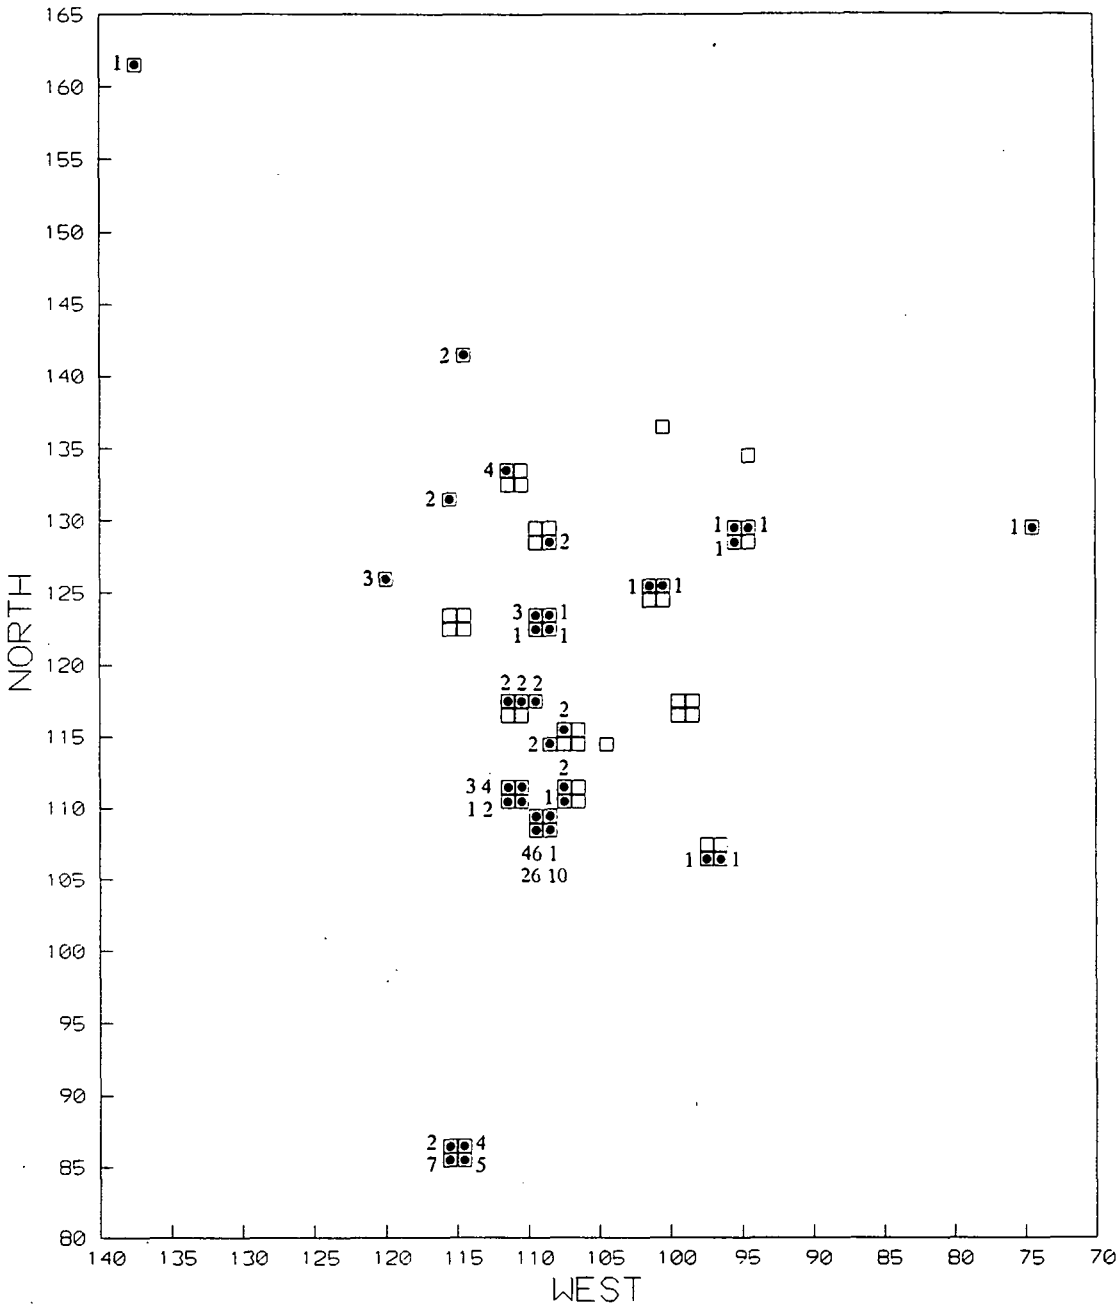

Source: Engineering-Science

Kettering Park Site

Figure 39
Chert Debitage
from the A1 Horizon

Ceramics

The ceramic distribution from shovel tests was plotted, indicating a concentration in the southern and central parts of the site (Figure 40). Excavations in the A2 horizon indicate that ceramics were found in the southern and central portion of the site, but with increased density in the central area (Figure 41). Each of the three Woodland sub-periods had different vertical and horizontal ceramic distributions at the site. The highest concentration of Early Woodland ceramics were found at N132/W116 and N118/W112, N116/W108 and N110/W110 in the center of the main excavation block in the study area. This patterning does not appear to be a product of the sampling strategy, because ceramics were absent in many of the 1x1 and 2x2-meter units. The sample of Middle Woodland ceramics was very small and scattered. The only clear patterns were that these artifacts were found mainly in the plowzone and they were located exclusively in the largest excavation block in the study area. In contrast, Late Woodland diagnostics were found virtually exclusively in the plowzone and were clustered towards the southern and central-western sides of the largest excavation block within this stratum.

Fire-Cracked Rock

Fire-cracked rock distribution was plotted for both the A1 and A2 horizons (Figures 42 and 43). Examining this distribution determined whether remnant features could be identified. Furthermore, an attempt was made to examine whether the patterning of fire-cracked rock was similar to the ceramic spatial patterning. This correlation was studied as a means of determining possible cooking areas in the absence of hearth features. Fire-cracked rock was found in the A1 horizon of virtually every test and excavation unit. However, there appeared to be no meaningful correlation between the distribution of fire-cracked rock and ceramics in the upper strata of the site. The data from the A2 horizon were similar but the higher fire-cracked rock concentrations mirror the ceramic concentrations to a greater extent. However, N130/W96 was wholly devoid of ceramics but had 36 pieces of fire-cracked rock.

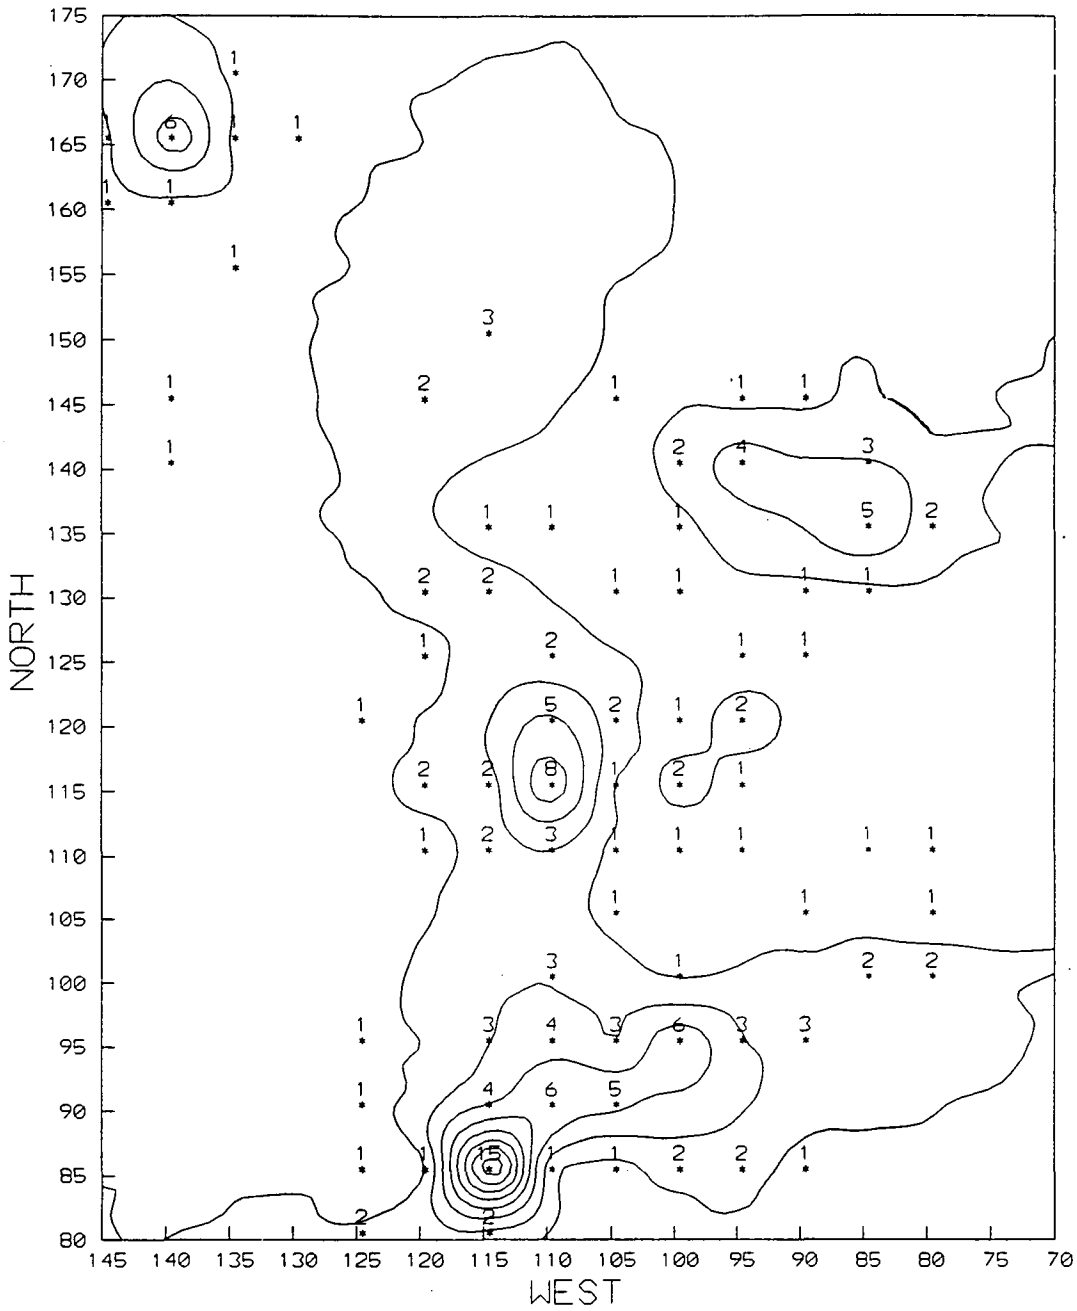

CONTOUR INTERVAL = 1.5

Source: Engineering-Science

Kettering Park Site

Figure 40
Ceramics Recovered
from STPs

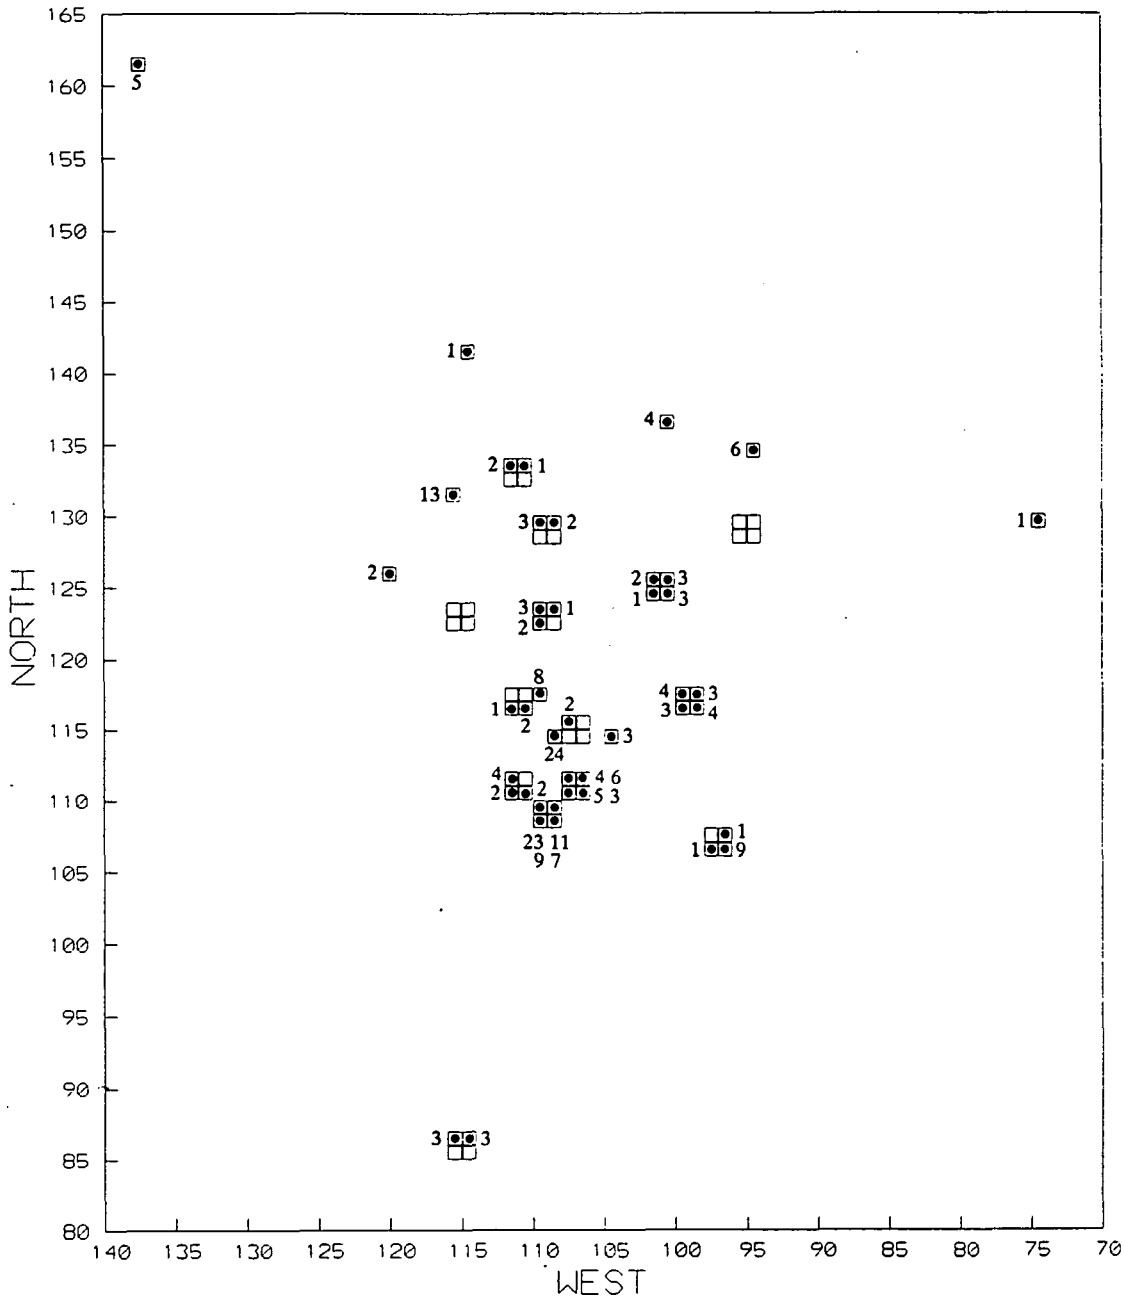

Source: Engineering-Science

Kettering Park Site

Figure 41
Ceramics Recovered
from the A2 Horizon

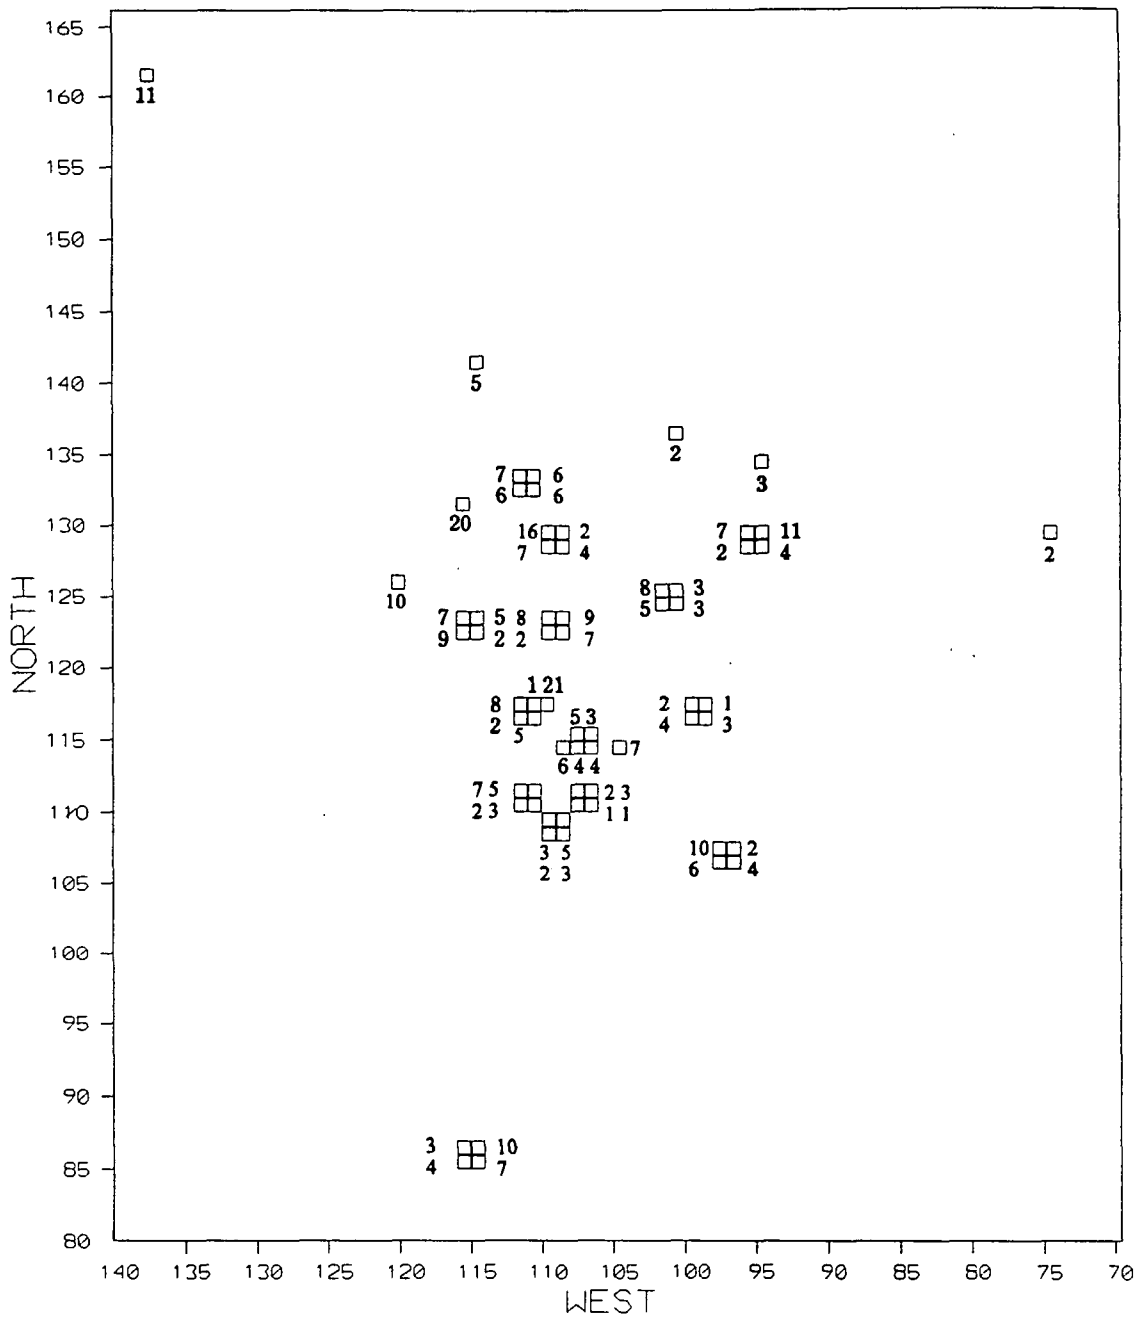

Source: Engineering Science

Figure 42
Fire-Cracked Rock
from the A1 Horizon

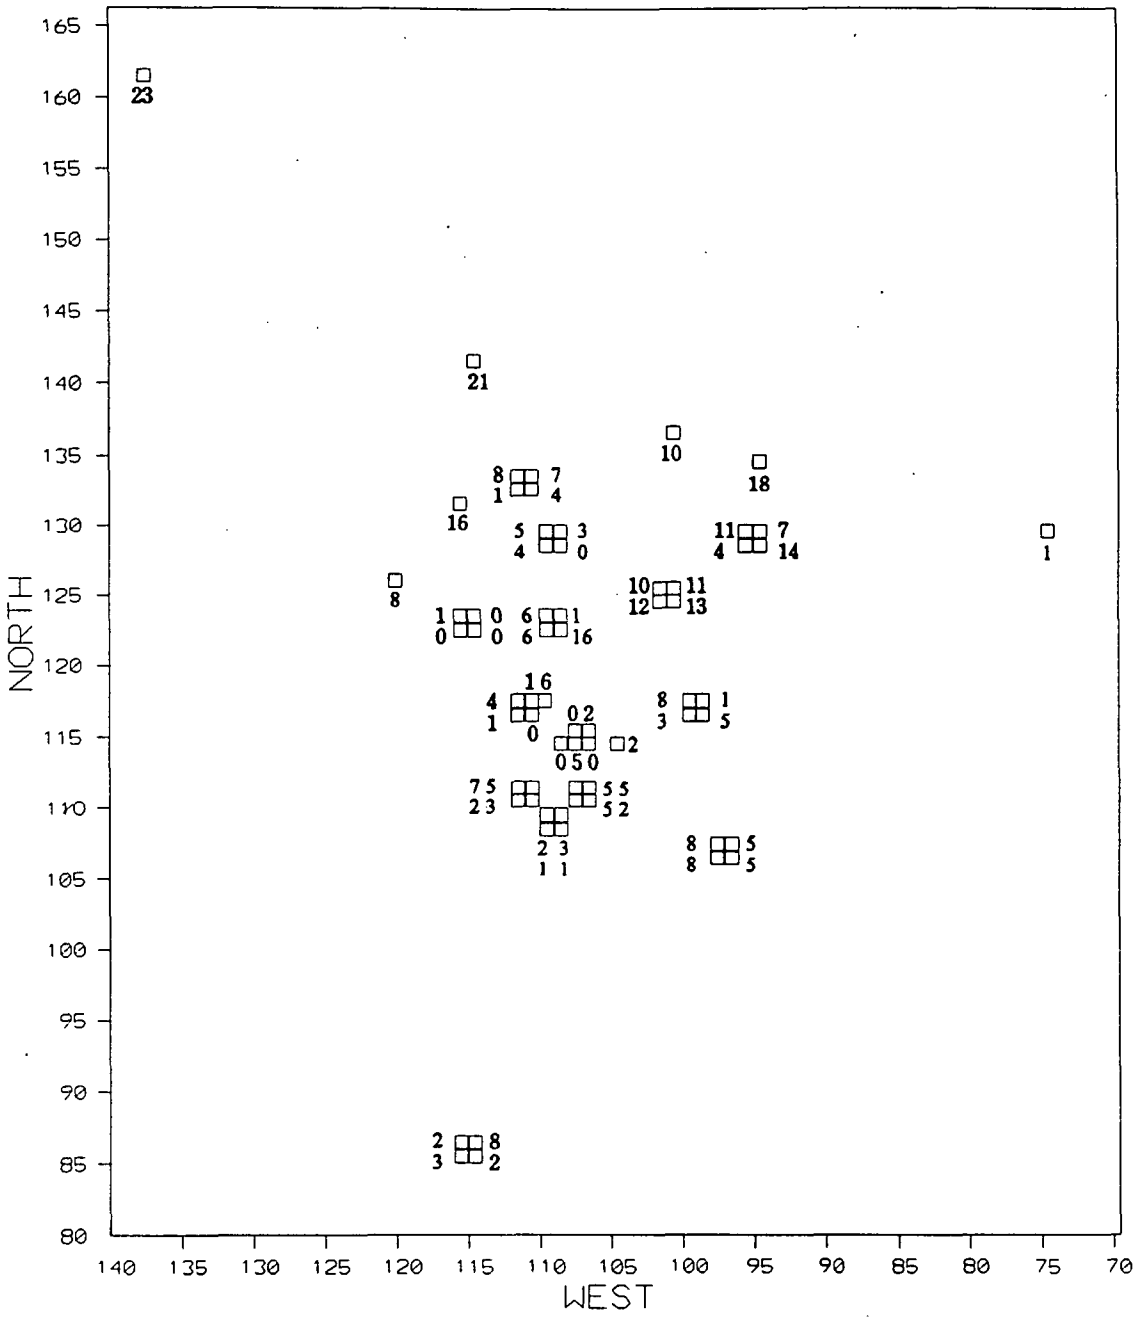

Source: Engineering Science

Kettering Park Site

Figure 43
Fire-Cracked Rock
from the A2 Horizon

Projectile Points

The single Early Archaic projectile point and the three Middle Archaic points were all found on the central and southwestern sectors of the main excavation block (Figure 44). This sample is far too limited to draw conclusions about the earliest occupations at the site, rather than to say that it is possible that the southwestern side of the study area may have been the location of its earliest occupation.

Projectile points dating to the Late Archaic/Early Woodland Transition and to the Early Woodland Period were found in both excavation blocks, but they were concentrated in the central and southern areas of the largest excavation block in N87/W115, and in N126/W102, N118/W112, N118/W100, N112/W112, and N112/W108 (Figure 45). This distribution correlates well with the ceramic data, as well as the location of high concentrations of fire-cracked rock. The possible implications of these correlations will be discussed later.

Late Woodland projectile points were found in the central and southwestern areas of the site, but they do not cluster in any particular unit or in a large contiguous area (Figure 46). The small sample size limits the scope of possible conclusions. However, the combined data from STPs and the test and excavation units show that Late Woodland points are conspicuously absent from the northern zone of the study area, and that this generally conforms to the distribution pattern of the Late Woodland artifacts.

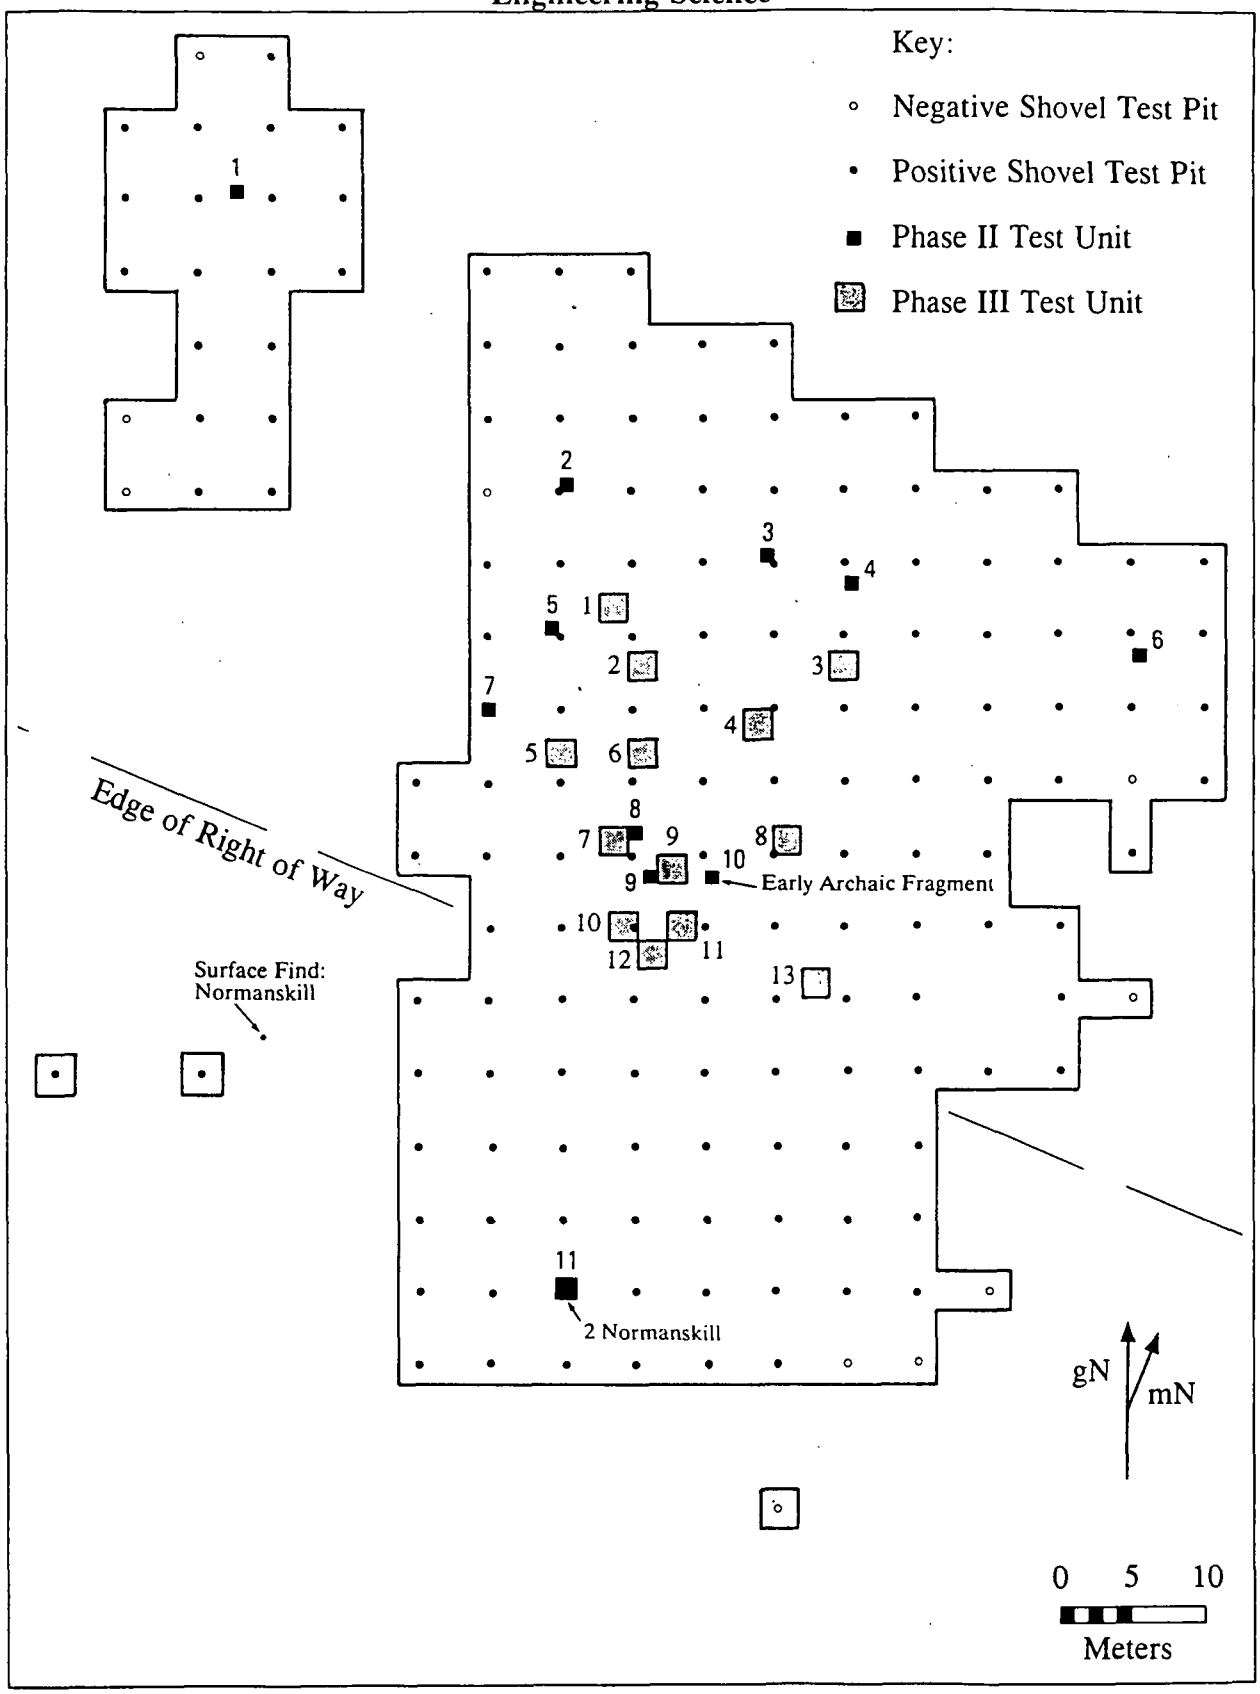

Kettering Park Site

Figure 44
Projectile Point Distribution for Early and Middle Archaic Periods

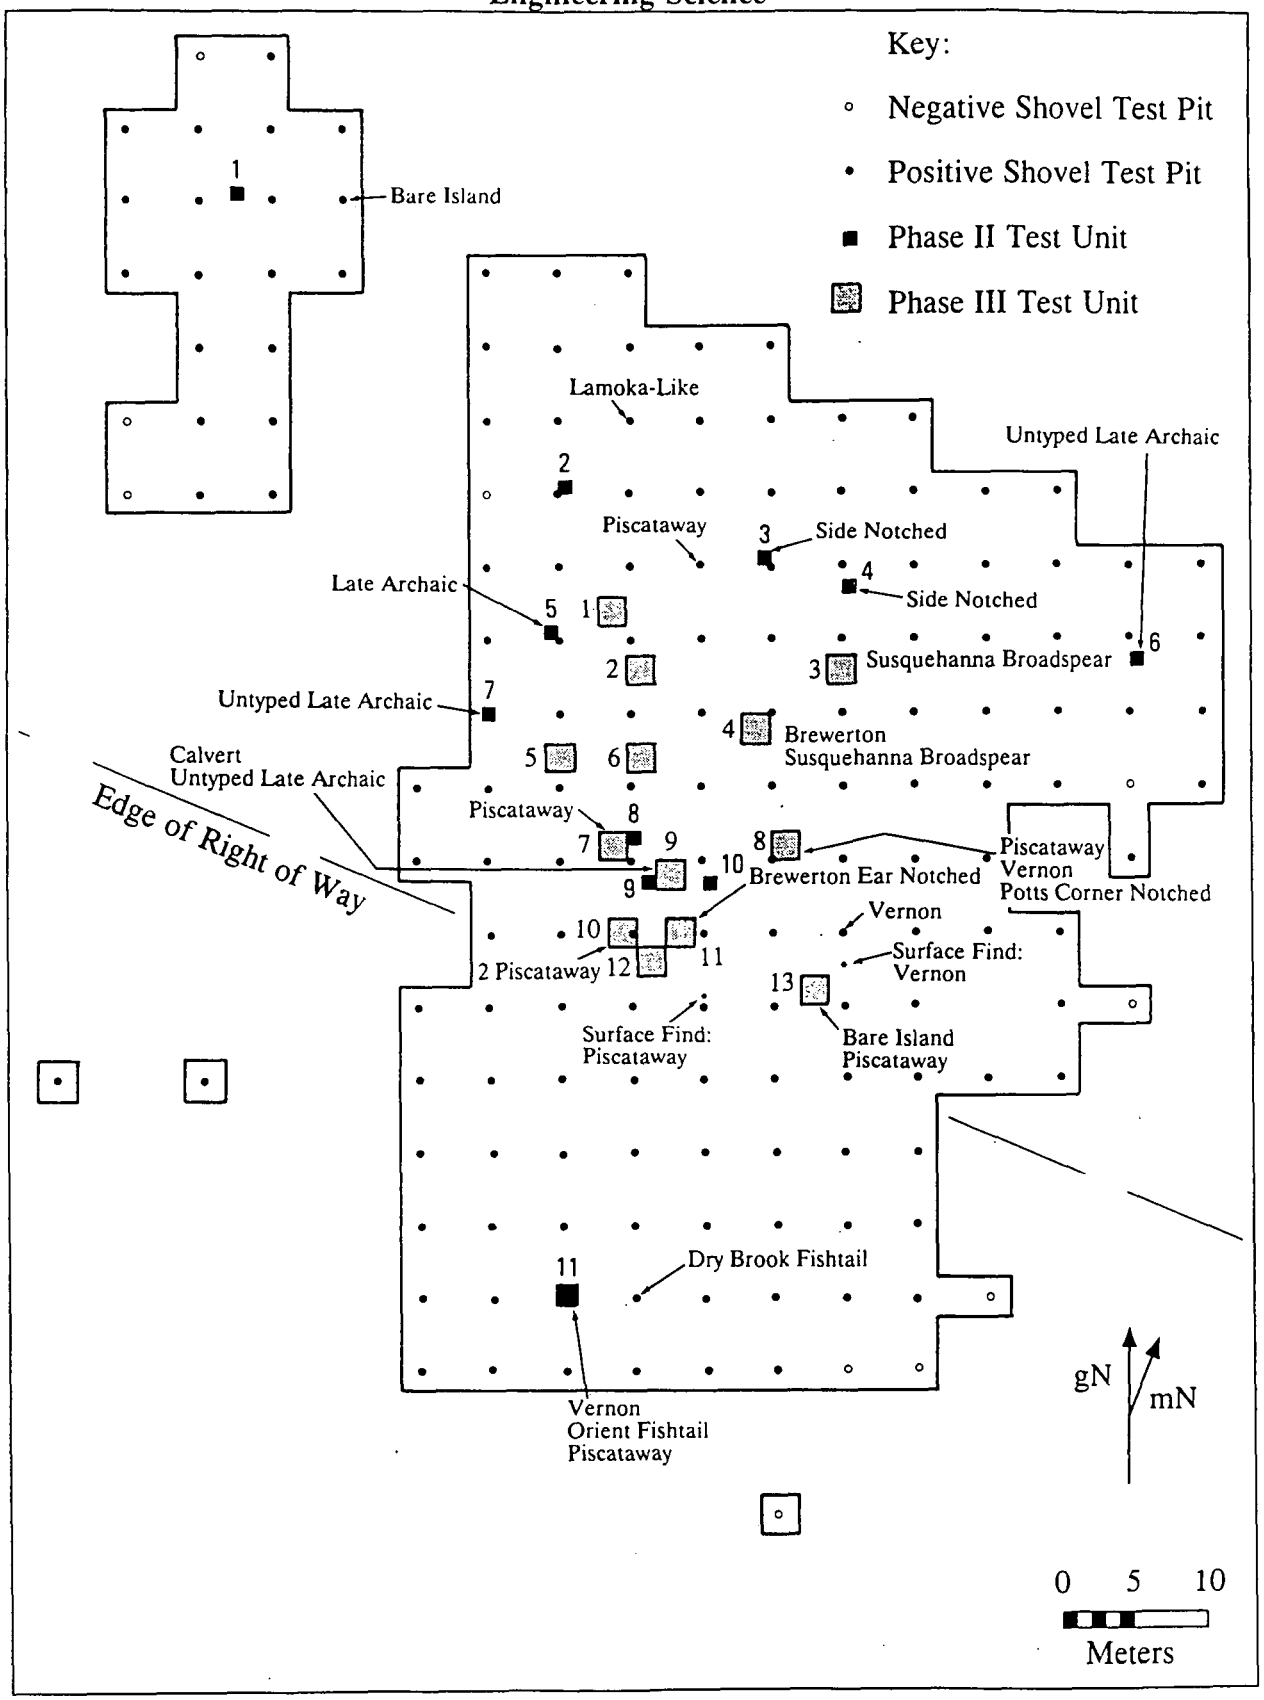

Kettering Park Site

Figure 45
Projectile Point
Distribution for Late
Archaic/Early Woodland Periods

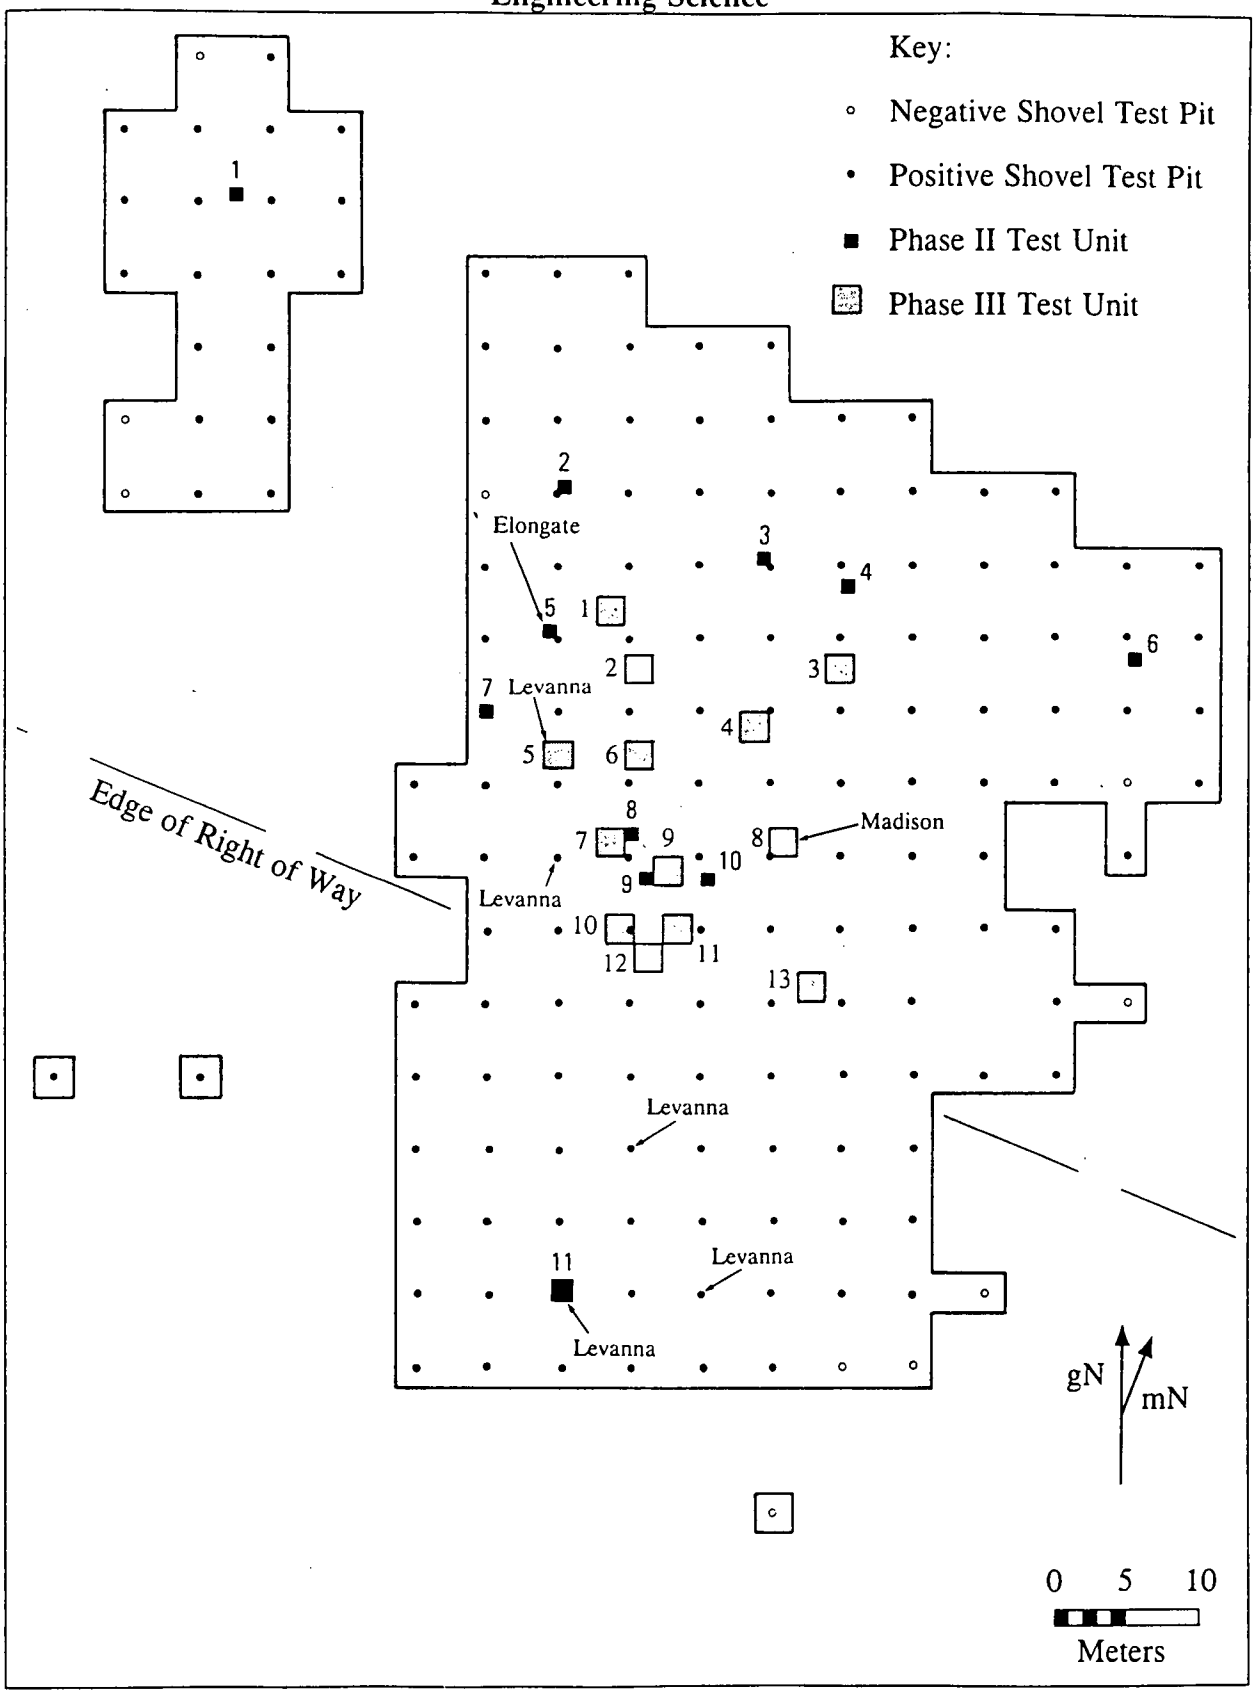

Kettering Park Site

Figure 46
Projectile Point
Distribution for the
Late Woodland Period

Activity Areas

The debitage distributions showed clustering of materials, potentially indicative of activity areas. These spatial distributions suggested zones of potential stone tool manufacture (Figures 47-50). These zones were further investigated to assess potential functional associations and relationships.

Lithic Manufacturing Areas

The cluster in level 2 at N110/W110 suggested a chert-working area. This area contained 55 pieces of dark yellow mustard-colored chert in association with a retouched flake tool of the same material. This material was associated with 19 flakes of the same material that were reddened due to heat treating. The adjacent unit, N112/W112, contained six flakes of the dark yellow mustard-chert. A Levanna projectile point that may have been made from the same core (the color of the flakes in the concentration was variegated, and the point's material was within the range of colors present) was found on the surface during the Phase I survey at N119/W116.5. It was not directly associated with the activity area, however.

The spatial distributions indicate that the manufacture of quartz tools was conducted at the Kettering Park Site. Unit N142/W115, a 1x1-meter unit, contained a particularly high density of quartz artifacts, producing 708 flakes and 121 cores. All 2x2-meter units produced high densities of quartz flakes. A high concentration of quartz debitage was found in the A2 horizon (Figure 48).

Bipolar Manufacture

Distribution maps of bipolar cores and bipolar flakes were made to compare the distribution of these artifact types and to try to define activity areas. Bipolar technology was of particular interest because of the large quantity of cores recovered during the three phases of work at the site. The distribution of the bipolar flakes only clustered at one of the excavated units, N108/W98. This unit yielded the highest number of flakes (n=16) from a 2x2-meter unit, and it produced 6 bipolar cores. All of the bipolar cores and debitage were quartz, and only two fragments were recovered from above the A2 horizon.

The highest concentration of bipolar cores (n=11) recovered from a 1x1-meter unit was found at N142/W114 (Figure 47). Only a single bipolar flake was recovered from the same unit. All but one of the cores recovered were in level 3 or below, some were as deeply buried as level 6.

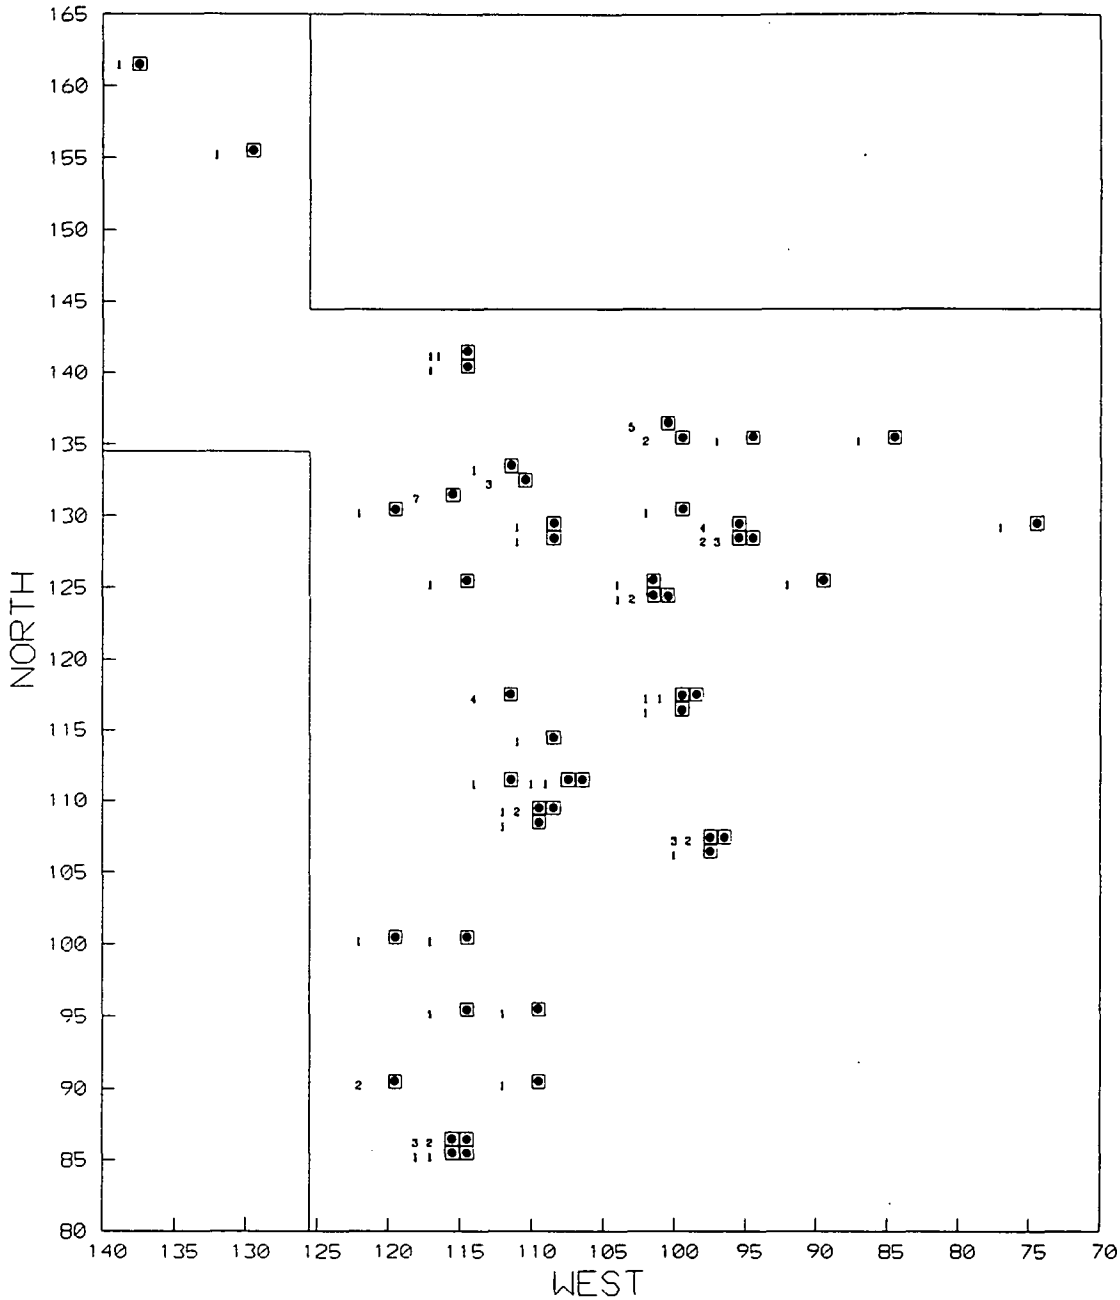

Source: Engineering-Science

Kettering Park Site

Figure 47
Bipolar Core Distribution from STPs and Phase II and Phase III Units

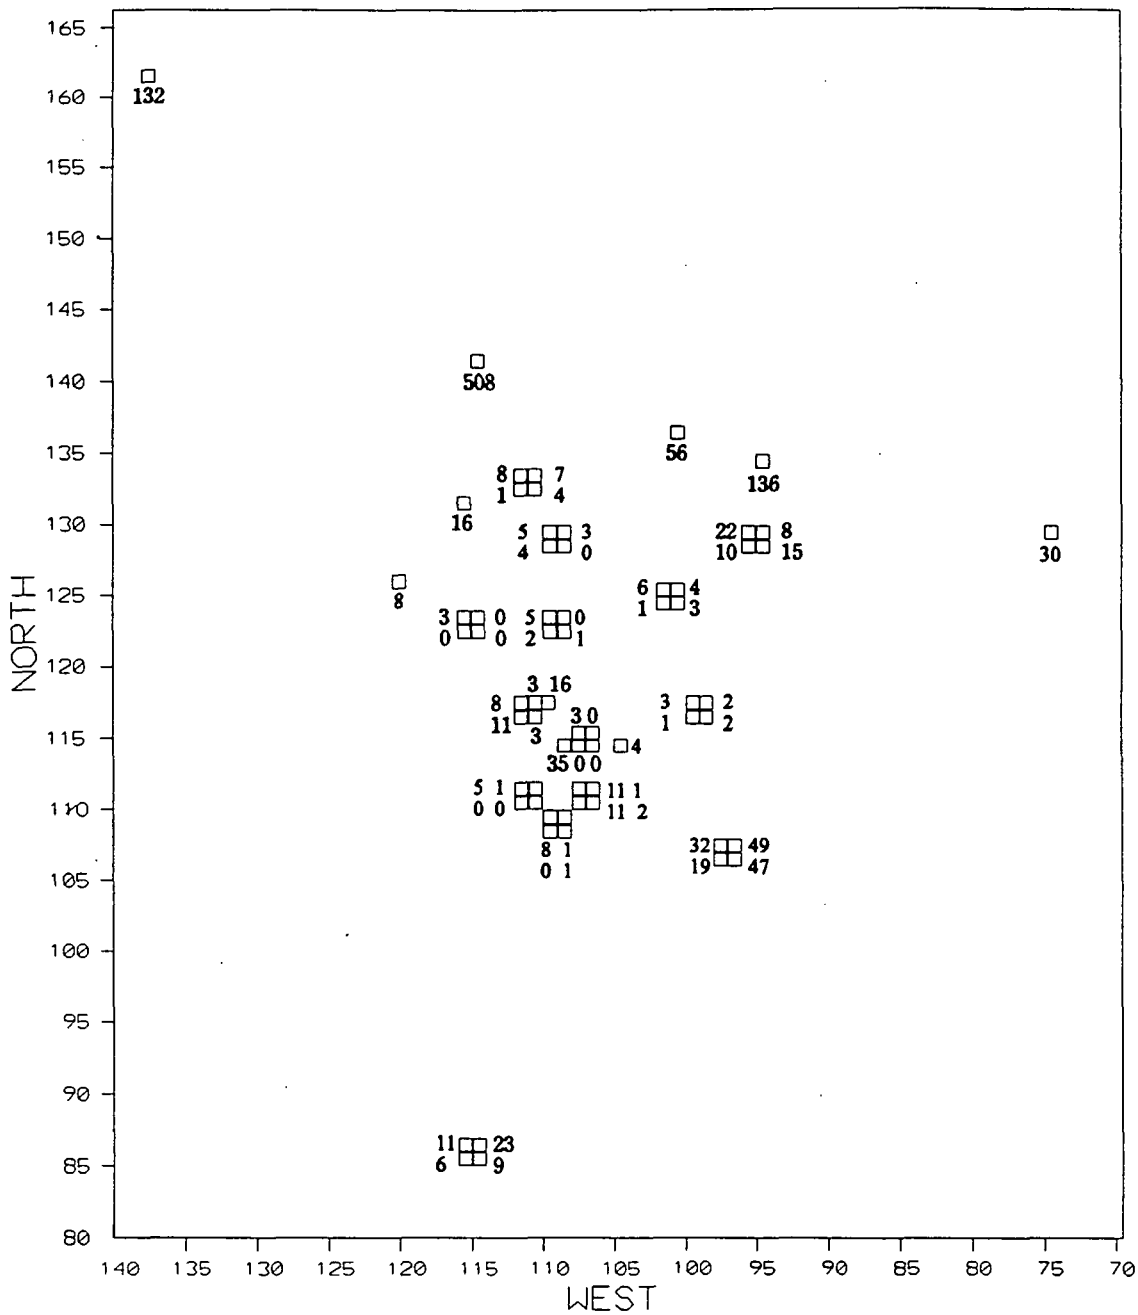

Source: Engineering Science

Kettering Park Site

Figure 48
Quartz Debitage
from the A2 Horizon

The possibility that bipolar technology varied according to depositional context was tested. The percentage of bipolar debitage in relation to the total amount of debitage within the A1 and A2 horizons was calculated. The results showed debitage present in virtually equal percentages of the total lithic assemblage in the A1 (8%) and the A2 (7%) horizons. Similarly, 43 bipolar cores were found within the A1 horizon, and 36 were found below. While horizontal patterns appeared to be expressed, these data do not provide potentially useful technological information among horizons.

Other Possible Lithic Manufacturing Areas

The highest concentration of quartz manufacturing debris in the A1 horizon was located in N132/W116 (n=115). Twelve of the 115 flakes found were decortication flakes; however no cores were found in this unit. Furthermore, no cores were found in adjacent units despite the fact that in N134/W112, 18 of the 44 flakes recovered within a 2x2-meter square were decortication flakes. However 4 m south of Unit 1, in N130/W110, a total of 4 cores, 8 decortication flakes, and 33 pieces of debitage were found. This suggests that this general sector was a potential stone tool manufacturing area.

In addition, 19 other units (counting 2x2s as single unit) had concentrations of flakes associated with cores and cortical flakes. In fact, only unit N137/W101 contained only non-cortical material (n=5 flakes). Furthermore, 7 of the 19 units that contained cortical flakes also had cores. Table 11 presents the location and quantity of these three types of materials.

Table 11: Quartz Manufacturing Materials From Possible Activity Areas in the A1 Horizon

Location	Number of Cores	Flakes and Chunks (non-cortical)	Decortication Flakes
N162/W138	2	26	18
N130/W110	4	33	8
N124/W116	1	11	2
N118/W100	1	11	4
N126/W102	1	7	3
N130/W96	1	59	11
N87/W115	2	59	10

All but one of the units measured 2x2-meters; only N87/W115 measured 1.5 by 1.5 meters. This may indicate that 1x1-meter units with high debitage concentrations such as N132/W116 would yield cores if the excavation area were expanded. The associations presented in the above table suggests that there may have been several quartz-working areas. Moreover, these areas were present throughout the site with the highest concentrations located in the center of the large excavation block. Since most units contained flakes of all production stages, it is probable that the areas indicated by the above table were a product of the sampling technique. The low quantities of these materials in N126/W102 may indicate that the first stages of manufacture occurred in that location and the tool was finished elsewhere, or that plowing and other disturbances at the site displaced the additional debitage.

Previously it was stated that Unit N142/W115 was the location of the highest concentration of quartz debitage at the site. Of the 508 quartz fragments located there, 494 were quartz chunks (95.6%). A single multifacial flake core was found with 9 decortication flakes, 2 primary flakes, 10 secondary flakes, and 2 tertiary flakes. The small size of this core (maximum length was 34 mms, and maximum width was 32 mms) does not account for the large quantity of chunks found in this 1x1-meter unit.

All areas of the site that had more than 20, and less than 100 flakes, also contained both decortication flakes and cores. Areas of the site with very high concentrations of quartz debitage (over 100 pieces) tended to have high quantities of chunks, and no cortical material. The only exception to this pattern was at N135/W95 where, of a total of 135 pieces of debitage, only 9 were chunks. In total, 33 decortication flakes were found in this assemblage, and consequently the area appears to have been a tool manufacturing area. The distribution of the quartz debitage and associated cores clearly indicates that a great deal of tool manufacturing was carried out at this site. Table 12 quantifies the relationship between cores, decortication flakes, and other flake debris.

Table 12: Quartz Manufacturing Materials from Possible Activity Areas in the A2 Horizon

Location	Number of Cores	Flakes and Chunks (non-cortical)	Decortication Flakes
N162/W138	1	132	14
N142/W115	1	499	9
N137/W101	2	41	15
N87/W115	1	45	4
N130/W110	2	18	7
N118/W100	2	76	51
N126/W102	1	14	3

Several potential quartz-working areas associated with decortication flakes and cores were identified (Figures 49 and 50). The horizontal distribution of the activity areas is different, and they do not overlap. The vertical location of the potential activity areas are similar within the two horizons.

Two possible quartzite working areas in the A2 horizon were also detected. The areas contained a relatively high concentration of quartzite flakes, a few decortication flakes, and a core. The excavations at Unit N130/W110 revealed 3 decortication flakes, and 67 flakes produced during the later stages of manufacture (19 primary, 30 secondary, 13 tertiary, 3 unidentifiable flake fragments, and 2 chunks). It should be noted that level 2 immediately above this unit contained 76 flakes and 3 cores, but it was heavily disturbed by burrows and washes. It is likely that the disturbances carried this material upward because level 3 was relatively intact, but due to the quantity of disturbance it is difficult to state with certainty. The second area, Unit N130/W96, had 1 core, 3 decortication flakes, and 31 flakes pertaining to the later stages of manufacture (6 primary, 18 secondary, 8 tertiary, and 4 chunks). Given the low overall quantities of materials present in these areas, it appears that only part of an activity area was visible, and that the surrounding unexcavated areas could potentially contain more manufacturing materials.

Comparative Artifact Distributions

Among the activity areas that were identified were those associated with lithic production, which have high concentrations of discrete material types and debitage. It should be noted that an attempt was made to determine which artifacts were made at the various activity areas. There

were no distinct correlations between the location of bifaces and lithic manufacturing areas, the only definite association found was the location of a chert unifacial tool in association with chert flakes. The provenience of the hammerstones recovered also did not correlate with the activity areas.

The overall artifact patterning at the site indicates an apparent inverse relationship between the location of manufacturing debitage and clusters of ceramic fragments. This inversion is particularly true of the A2 horizon, where the areas of highest lithic scatter tend to have the lowest quantity of ceramics (N142/W115 contained only one sherd). Although there were no features discovered at the site, the distribution pattern suggests a segregation of activities during the Early Woodland occupation, indicating that lithic reduction and food preparation and storage occurred in separate areas of the site. The highest concentration of ceramics was in the site center, and the lithic distributions clustered north and south of the N120 line.

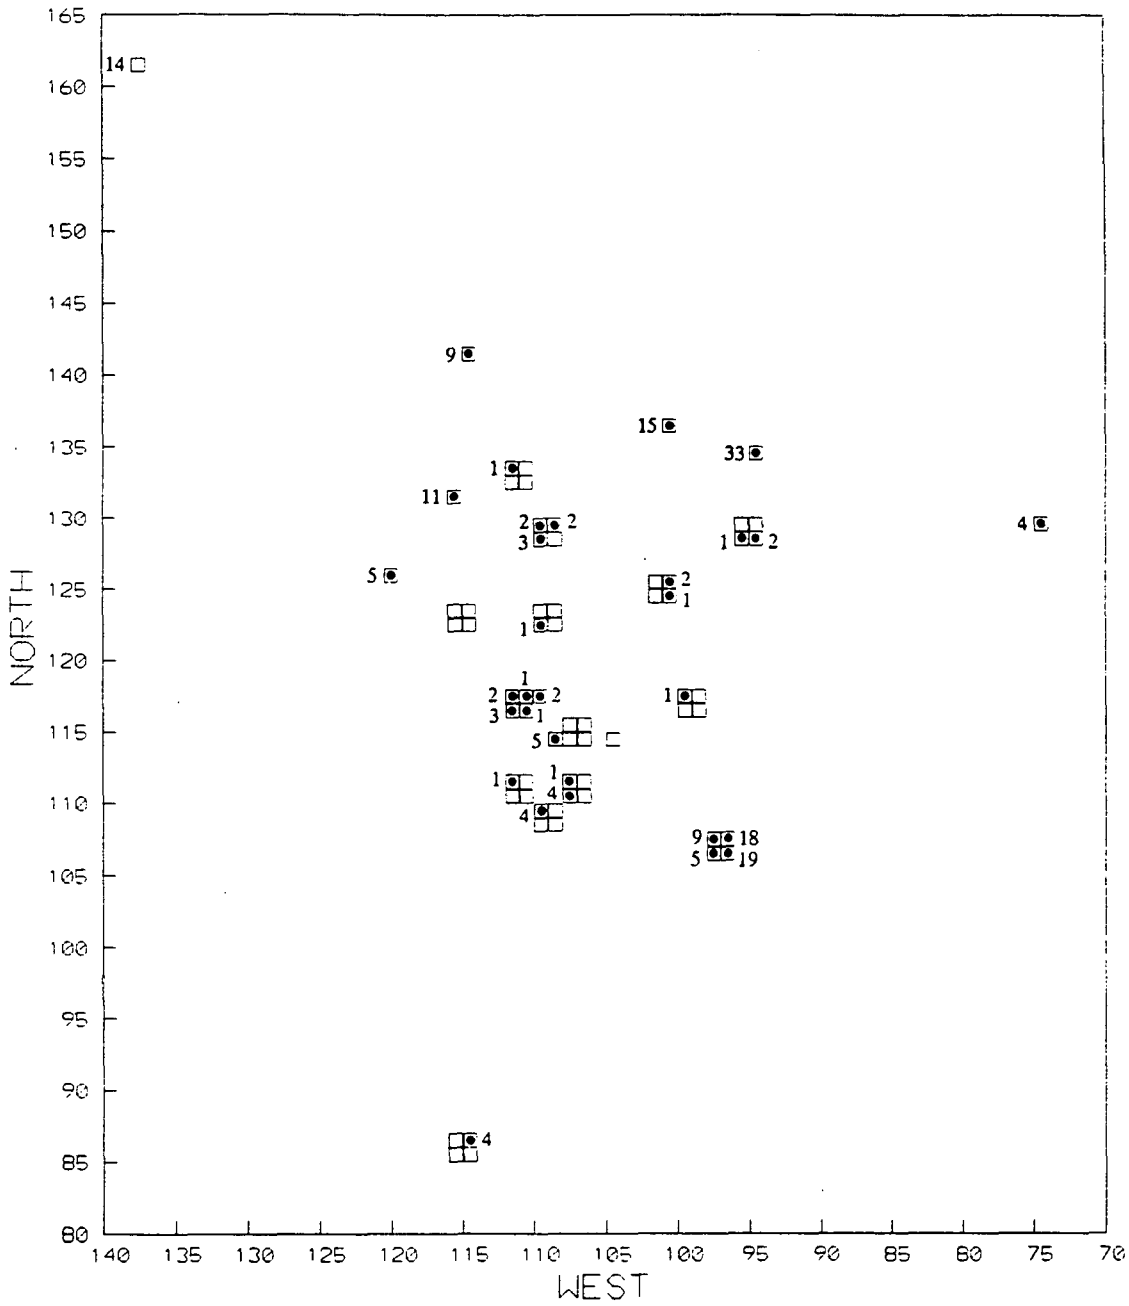

Source: Engineering-Science

Kettering Park Site

Figure 49
Quartz Decortication Flakes
from the A2 Horizon

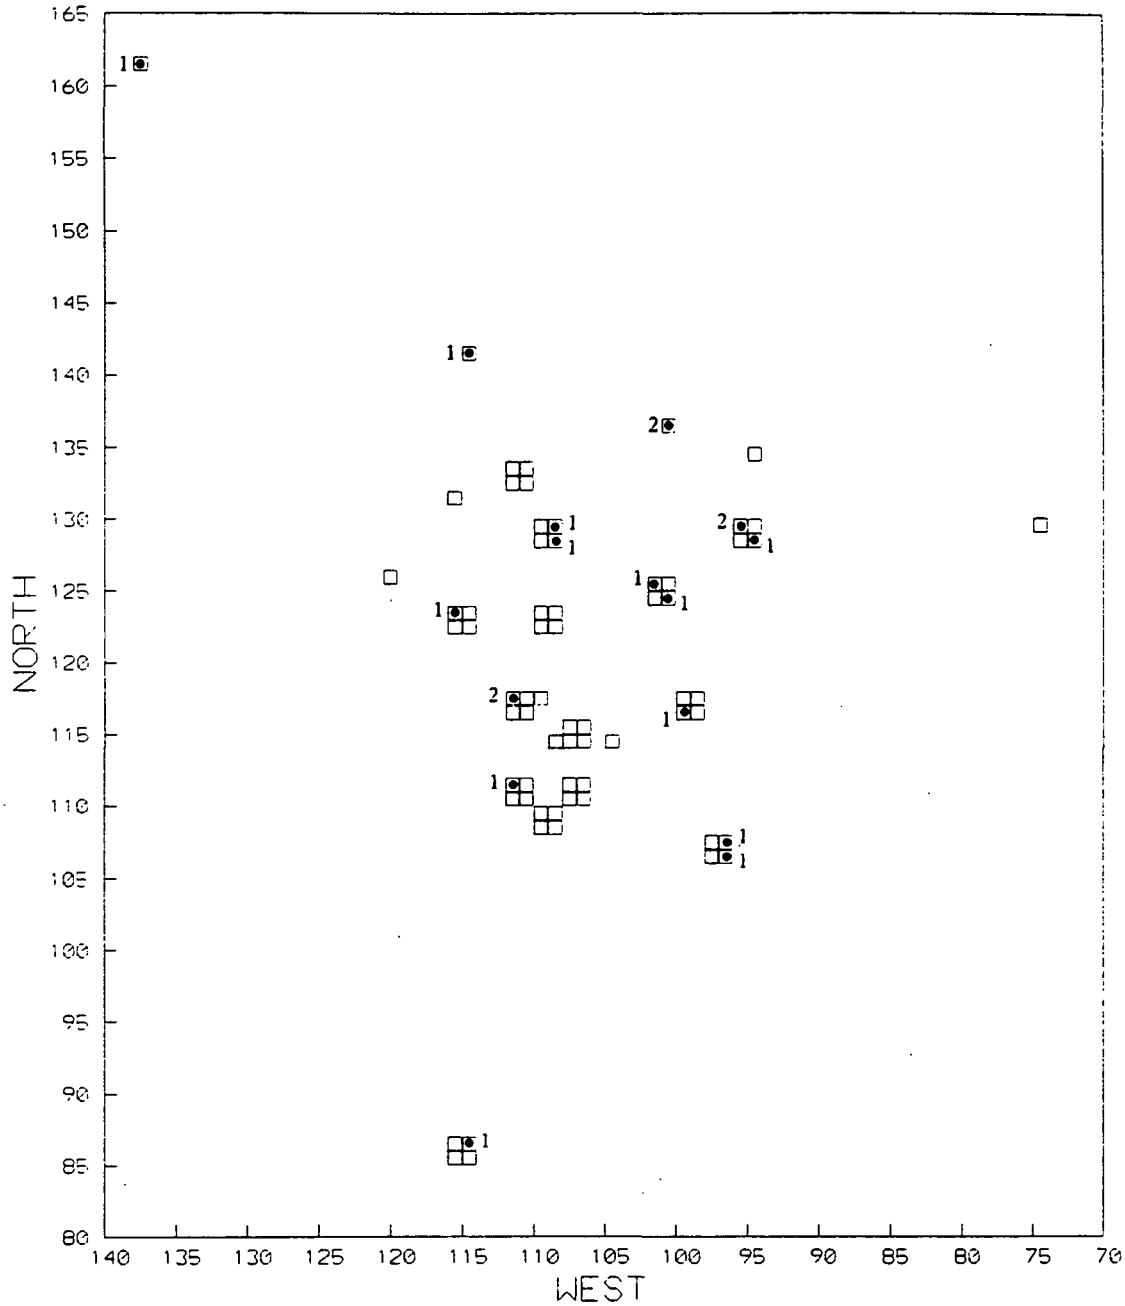

Multifacial Cores and
Unidentifiable Core Fragments

Source: Engineering-Science

Kettering Park Site

Figure 50
Quartz Cores
from the A2 Horizon

X. GENERAL CONCLUSIONS

Synthesis

Archaeological evidence from the Kettering Park Site indicated intermittent site use beginning as early as the Early Archaic Period and extending into the Late Woodland. Evidence from the early portions of the Archaic was scant, consisting of the distal section of a projectile point with serrated blade edges judged to be Early Archaic, and four Middle Archaic points. The relative lack of material attributable to these periods suggests that site use was sporadic or ephemeral. More extensive site use occurred during the Late Archaic. Site use increased in the Early Woodland, during which period activity appeared to have been both complex and intensive. A limited amount of evidence of Middle Woodland occupation was recovered. The Late Woodland Period saw a resumption of activity, though at a less intensive level than in the earlier portion of the Woodland.

The horizontal extent of the site was defined by the current 21.5-22 m contour line. The western, southern, and eastern site limits are defined by the paleo-channels of the Northeastern and Western Branches, which are tributary drainages of the Patuxent River. The northern edge of the site is obscured by Maryland Route 214 and a sewer line north of the highway right-of-way. Nonetheless, sloping ground immediately north of the road probably represents the northernmost limit of site use.

The uppermost depositional unit, designated A1, appeared to have been a disturbed layer consisting of a complex of plowed and alluvial and sheetwash sediments. As discussed earlier, there is evidence that in some areas the lowest levels of the A1 horizon were relatively intact, yet it is apparent from the vertical distribution of artifacts in most units that the bulk of the materials from this time period were disturbed by tillage. Furthermore, although the A2 horizon was considered intact, there was probably postdepositional disturbance and intrusions of material from upper levels.

Chronology

A study of the Patuxent River drainage conducted by Steponaitis (1980) is one of the only comprehensive chronological surveys undertaken in the region, and is used here as a basis for the assessment of chronology at the Kettering Park Site (Table 13). The study consisted of a typological analysis of artifact collections from 89 sites in Anne Arundel, Prince George's, Calvert and St. Marys Counties, in southern Maryland. The resulting chronological sequence

was based on the presence of diagnostic lithic and ceramic artifacts dated at regional and often extra-regional locales. Table 13 summarizes the latter portion of the Patuxent River Survey chronology, beginning with the Late Archaic Period, during which occupation of the Kettering Park Site was most intensive. The list includes the characteristic artifacts used to define each subperiod, as well as corresponding diagnostic artifact types recovered at the Kettering Park Site and their frequencies of occurrence.

It should be noted that the Steponaitis's study was an appraisal of existing artifact collections, some of which were poorly documented or incomplete. The resulting chronology was based solely on changes in projectile point form and, for the Woodland period, in ceramic wares. In the seriation, no overlap was seen in point types between cultural phases. Such direct equating of point types (and, by extension, ceramic wares) with exclusive cultural phases is an example of the so-called "Coe axiom," enunciated by Brennan (1967), which holds that single point types occurred during particular cultural periods and were unique to those periods. Recent work has brought this perspective into question, indicating the contemporaneity of certain morphological types (Custer and Bachman 1986; Rue and Bergman 1991). Thus the detail and exclusivity with which Steponaitis originally attempted to refine her chronology may be unwarranted. A revised chronology published several years later did in fact acknowledge temporal overlap in several point types, although without radiocarbon dates, the Vernon and Piscataway types remained ill-defined chronologically (Steponaitis 1986).

A recent statistical analysis of the Patuxent drainage data attempted to evaluate the chronology based on the spatial distribution of each type (Reeve 1992). The analysis generally supported the Steponaitis's outline, though there were discrepancies. For example, Piscataway was placed with Calvert and Fishtail points in the Transitional Archaic/Early Woodland, while Vernon was placed with Broadspears and Holmes in the Late Archaic (Reeve 1992:123). The association of Vernon with Late Archaic types was statistically weak. Other associations were obviously incorrect, considering accepted radiocarbon data. For example, Kirk and Palmer, firmly dated to the Early Archaic at several locales, were placed in the Late Archaic; Guilford and Jack's Reef, radiocarbon dated to the Middle Archaic and Middle Woodland Periods respectively, was placed in the Transitional Archaic/Early Woodland. These results highlight the problems inherent with single dimensional analyses, in this instance using only spatial distribution data, assuming that types closely related in space will be closely related in time. The actual correlation between point types and temporal periods is considerably more complex than may be described by simple models.

Table 13. Comparison of Patuxent River Survey Chronology with Temporal Diagnostics from the Kettering Park Site

Patuxent River Survey	Kettering Park Site	Frequency
Late Archaic I (4000-3000 B.C.)		
Piscataway	Piscataway	8
Late Archaic II (3000-2200 B.C.)		
Vernon	Vernon	4
Brewerton Side-Notched	Brewerton Eared-Notched	2
Brewerton Corner-Notched		
Brewerton Eared-Notched		
Brewerton Eared-Triangle		
Late Archaic III (2200-1900 B.C.)		
Holmes		
Late Archaic IV (1900-1700 B.C.)		
Savannah River Stemmed	steatite bowl fragment	1
Koens-Crispin		
steatite bowls		
Late Archaic V (1700-1500 B.C.)		
Perkiomen Broadspear	Susquehanna Broadspear	2
Susquehanna Broadspear		
steatite bowls		
Fishtail Tradition (1500-750 B.C.)		
Orient Fishtail	Orient Fishtail	1
Drybrook Fishtail	Drybrook Fishtail	1
Marcey Creek	Marcey Creek	2
steatite bowls		
Accokeek Phase (750-400 B.C.)		
Calvert	Calvert	1
Accokeek Cord-Marked	Accokeek Cord-Marked	449
	Untyped Early Woodland	150
Selby Bay (A.D.200-800)		
Selby Bay Lanceolate	Mockley	26
Selby Bay Stemmed		
Mockley		
Little Round Bay (A.D.800-1250)		
Levanna	Levanna	8
Rappahannock Series		
Jack's Reef Pentagonal		
Jack's Reef Corner-Notched		
Sullivan Cove (A.D.1250-1600)		
Madison	Madison	1
Rappahannock Series	Townsend	50
Townsend Series	Potomac Creek	26
Sullivan	Moyaone	6
Potomac Creek		
Moyaone		

In terms of specific correlations, the Patuxent River chronology subdivides the Late Archaic Period into five phases. The data for Late Archaic I and II indicated a great deal of overlap in the sites occupied. Botanical information from the Rowe site (McNett and Gardner n.d.), with an Archaic II component, indicated the importance of nut procurement in addition to hunting, while shellfish remains are reported at sites spanning both phases in Kent County, on the Eastern Shore of the Chesapeake (Wilke and Thompson 1977 cited in Steponaitis 1980).

The use of steatite for bowl manufacture is recognized in the Patuxent sequence in Late Archaic IV and is noted as continuing through the Fishtail Tradition. Yet the overall frequency of occurrence of the material was relatively low: the number of sites from which steatite was reported was considerably below that of sites reported with diagnostic lithics from any of the three phases. The single fragment recovered at the Kettering Park Site appeared to reflect this generally low incidence. The specimen could not be associated contextually with a specific projectile point type, and so it was arbitrarily placed in the table opposite the first occurrence of steatite in the Patuxent River chronology. Other Late Archaic points recovered at the Kettering Park Site did not appear in the Patuxent sequence. One point was identified as Lamoka, a stemmed point dated in central New York to the early portions of the Late Archaic, and three points were identified as Bare Island, a stemmed type associated with the mid-to-late portions of the Late Archaic (Ritchie 1971).

The first Early Woodland phase in the Patuxent sequence was a transitional Late Archaic/Early Woodland phase referred to as the Fishtail Tradition. This tradition was marked by Orient and Dry Brook Fishtail points and the manufacture of Marcey Creek ceramics. Steatite bowls continued in use. Lifeways during the Fishtail Tradition are believed to have been very similar to those of the preceding Late Archaic V, exhibiting a riverine focus and, in particular, taking advantage of the ongoing stabilization of estuarine environments.

The second subperiod of the Early Woodland is referred to as the Accokeek phase, defined by the presence of Accokeek Cord-Marked ceramics. A key concept in Steponaitis's evaluation of Early Woodland settlement patterns is a distinct change in lifeways between the Fishtail Tradition and the succeeding Accokeek phase, marked by a shift to a more sedentary settlement pattern. An apparent increase in the intensity of occupation at the Kettering Park Site during this period is suggested by the high frequency of occurrence of ceramic fragments. The Patuxent River artifact sample included 578 Early Woodland sherds in its entirety. The Accokeek Cord-Marked type, as employed by Steponaitis, includes all the Accokeek types discussed in this report: Accokeek Cord-Marked, Accokeek Coarseware, and Accokeek Mica-Tempered. The total of Accokeek ceramics with identifiable surface treatment from the

Kettering Park Site is 449 sherds, while an additional 150 untyped Early Woodland sherds were recovered. The combined figure of 599 was slightly greater than the number recovered for the total survey area studied by Steponaitis. Part of this discrepancy may be attributed to recovery rates in the surface collections which accounted for most of the material studied by Steponaitis, rates that may have been influenced by problems with artifact visibility and recognition. Yet the relative magnitude of site use during the Accokeek phase at the Kettering Park Site is apparent.

The associated projectile point type for this phase in the Patuxent chronology was the small, straight-stemmed Calvert type, of which only a single fragmentary example was recovered from the Kettering Park Site. The point was recovered from a mixed plowzone layer, and consequently, no definite ceramic association could be established. All of the Calvert points from the Patuxent survey were recovered from similarly mixed contexts. Yet others have been excavated from well-provenienced Accokeek contexts, as at the type site for the ceramic, Accokeek Creek (Stephenson and Ferguson 1963), and at the King I site on the Severn River (Wright 1973). One additional Early Woodland point type recovered at Kettering Park, the Potts Corner-Notched, did not appear in the collections from the Patuxent survey. The occurrence of Potts is more common in Virginia, suggesting the possibility of contacts with western populations. The high incidence of Accokeek wares and absence of Calvert points at Kettering Park may indicate that the correlation between Accokeek and Calvert is not as tight as suggested by the Patuxent data, and that other point types, such as Piscataway or Vernon, found in the same contexts at Kettering Park, were associated with the ceramics. In addition, the finding reveals the methodological problems inherent in assessing the intensity of site use for a given time period based on the occurrence of projectile points alone.

Like the Early and Middle Archaic components at Kettering Park, the Middle Woodland component was small, and of insufficient size and variety for comparative purposes. In the succeeding Late Woodland Period, site use again appeared relatively intensive. In the Patuxent River sequence, Rappahannock and Townsend are seen as indigenous complexes, while Potomac Creek and Moyaone, which occur along the Western Shore of the Chesapeake, are accepted as evidence of interaction with populations to the west. Sullivan wares were not recovered at Kettering Park, while small samples of Shepard and Riggins wares were recorded. The latter wares are characteristic of the Great Valley and Piedmont of northwestern Virginia, western Maryland and southern Pennsylvania, and of southern New Jersey, serving as additional evidence of contacts with western and, in this case, northern populations. The absence of Rappahannock series ceramics and Jack's Reef projectile points at Kettering Park suggest that extensive site use did not resume until the later portion of the Late Woodland. In contrast, the

incidence of triangular points at the site suggests an alternative interpretation: Levanna points, which fall earlier in the sequence, occurred at greater frequency than the later Madison. As seen with the Early Woodland materials at the site, projectile point totals may not provide the most complete picture of the intensity of site use.

If the Patuxent River model were accepted as it stands, the artifactual material from the A2 horizon at the Kettering Park Site would represent seven phases of occupation and two distinct lifeways during the Late Archaic-Early Woodland transition. While multiple occupations over this period of time are a reasonable explanation for the artifactual patterning at the site, the contextual data suggest different associations between lithic and ceramic data. A key example is the temporal placement of the Piscataway type. There are no regional examples of Piscataways with firmly associated radiocarbon assays. A range of dates has been assigned to the type based on contexts of varying validity, including the Late Archaic Period, along the Potomac (McDowell 1972; Evans 1984), the Early Woodland, in southern Virginia (Mouer *et al.* 1981), and the Early Woodland-Middle Woodland transition in northern Virginia (Moore 1990, 1992). Many of the Piscataway points at the Kettering Park Site were recovered from the A2 horizon, in apparent association with Accokeek ceramics. If the Piscataway type were in fact indicative of Early Woodland occupation, the stratigraphic position of the points at the Kettering Park Site would be more readily explained.

The Late Woodland data from the Kettering Park Site also exhibit variation from the findings of the Patuxent River survey. However, Steponaitis (1980:34) noted an increasing degree of ceramic variability apparent during the Late Woodland, particularly in the late phase. Townsend and Potomac Creek wares were predicted to be more prevalent in the northern portion of the Patuxent Valley, but in fact the distribution of Townsend, Rappahannock, and Potomac Creek wares appeared to be fairly even throughout the drainage. The Late Woodland sample from the Kettering Park Site does to some degree conform to her expected results, with the complete absence of Rappahannock wares and the dominance of the Townsend series wares. Ceramic diversity is seen in the presence of non-indigenous wares such as Potomac Creek, Shepard, and Riggins, which, as noted, may be indicative of external contacts.

Settlement

Gardner's (1982) model for settlement patterns in the Middle Atlantic region is one of the most widely cited settlement models advanced for the area. During the Early Woodland Period on the Coastal Plain, he suggests a network of interconnected sites that form a site system. According to the model, large macro-social unit base camps were located along the shorelines

of major streams. These large camps were connected with smaller, micro-social unit camps functioning as resource procurement stations and located at seasonally determined, inland sites. A prime focus of the subsistence round was the harvesting of anadromous fish at inland stream sites in spring and early summer, and shellfish in the estuaries of high-order streams later in the season.

Gardner describes the macro-social unit base camps as "characterized by a diverse range of artifacts and a relatively large use area, and ... inhabited by a relatively large population" (Gardner 1982:56). Among the artifact assemblages indicative of these sites were comparatively high numbers of ceramics. In contrast, micro-social unit camps were inhabited by much smaller groups, and "artifacts from these locations occupy a much smaller space and are consistently made from cobble cores and core fragments, cobble core reduction debitage, bifaces, broken projectile points (generally unfinished), and infrequent ceramics" (Gardner 1982:56). These micro-social unit camps could have been small base camps or procurement outposts, such as fishing stations.

The data from the Kettering Park Site are far from conclusive, but appeared to conform with the model on a general level. The site is situated inland, in a locale expected for a small, resource procurement camp. The artifact assemblages are characterized by evidence of expedient lithic tool manufacture. Bipolar technology at the site appeared to have been fairly extensive relative to other lithic technologies: while bipolar debitage represented only 10% of the total quartz and quartzite debitage recovered at the site, 75.8% of the cores were bipolar, suggesting that a larger proportion the debitage than was originally catalogued in fact resulted from bipolar reduction. Most of the formal tools were finished products, presumably brought to the site ready-made, while relatively few manufacturing rejects were recovered. Bifaces in general represented less than 1% of the total artifact assemblage, suggesting that *ad hoc* lithic tools or, perhaps, non-lithic tools were relied on heavily. The absence of features further suggests short-term site use.

The use of ceramics, and the presence of significant quantities of non-local lithic raw materials, more closely fits Gardner's definition of a macro-social base camp. Problems with stratigraphic mixing at Kettering Park, inhibited analysis of the extent to which Early Woodland deposits at the site were the result of relatively continuous occupation or a succession of resource procurement episodes. Such a distinction is a critical factor in Gardner's model, in which base camps were occupied on a more continuous and intensive level, while procurement camps saw more contained and episodic use.

The data from the Kettering Park Site seem to generally conform to a model proposed by Custer (1989) for the Delmarva Peninsula. Custer (1989:142) proposes that the Late Archaic and Early Woodland Period were part of a single, overarching phase referred to as Woodland I. Woodland I is characterized by relatively sedentary lifeways in comparison with the more mobile, foraging settlement-subsistence pattern of the earlier portions of the Archaic. The peoples of this period had less portable storage technologies, larger population aggregates, and participated in elaborate exchange systems. The concept of cultural continuity between the Late Archaic and Early Woodland Periods was originally proposed by scholars such as Sears (1948) and Willey and Phillips (1958), all of whom proposed that the main difference in the lifeways of the Archaic and the Early Woodland was the addition of ceramics into the artifact inventory (Egloff 1991:248). Witthoft (1953) identified a transitional Late Archaic-Early Woodland artifact assemblage, which has become codified as the Transitional Period in some regions of the Middle Atlantic and the Northeast (Kinsey 1972; McLearen 1991). It appears that Custer's model is supported by data from the Kettering Park Site; the artifact inventory from the A2 horizon includes a relatively large variety of projectile point types that are traditionally attributed to the Late Archaic and Early Woodland and were found in apparent association with a large assemblage of Accokeek ceramics.

In terms of comparative data, few sites have been investigated in this portion of the Patuxent drainage at the resolution represented by the material from Kettering Park. The O'Barr site (18PR317), located several miles north of the Kettering Park Site on an unnamed tributary of the Patuxent, contained similar Early and Late Woodland components. Following Phase II significance testing at the site in the late 1980s, O'Barr was assessed as a small procurement camp focused on hunting. No direct evidence for fishing at the site was found. As at the O'Barr site, direct evidence of fishing was not recovered at the Kettering Park Site. No fish bone was recovered at the site, yet bone preservation in general was poor--the entire sample of bone consisted of unidentifiable fragments of avian or mammalian species. Nonetheless, based on the site location at the confluence of two tributary streams, it seems reasonable to suppose that fish represented an important resource for the Early Woodland inhabitants, and may have been a major focus of resource procurement. While no specific linkages may be proposed with the evidence at hand, the site may have served as a spring or early summer fishing camp associated with a larger base camp along the main stem of the Patuxent River.

A similar pattern of Late Archaic-Early Woodland site use was documented at the Higgins site (18AN489), on a ridge above tributaries of the Patapsco River (Ebright 1992). Echoing earlier researchers, Ebright concluded:

> At an interior site on the Western Shore such as the Higgins site, Early Woodland lifeways are not expected to be appreciably different than those of the preceding Late and Terminal Archaic subperiods. Although pottery is obviously a new addition to the material culture, stone tool kits are not expected to be significantly different in terms of tool generalization or diversity, than previous Archaic tool kits. The exploitation of fish resources may again be the focus of the settlement pattern (Ebright 1992:232).

The pattern in the Late Archaic-Early Woodland transition at the Higgins site included relatively high percentages of quartz in the artifact inventory, the combined use of bipolar and freehand percussion technologies, and resource procurement focused on fresh-water fishing, particularly in the later portions of the period.

The artifact assemblage and site location of the Kettering Park Site are comparable to Late Archaic-Early Woodland transition sites in Virginia as well. Assemblages from sites of the Elk Island Tradition of the southwestern Virginia Piedmont have ceramics and lithics which are similar to those of the Kettering Park Site (Mouer *et al.* 1981; Mouer 1991). Similarities include the predominance of Piscataway points in the lithic assemblage, the use of friable, cord-marked pottery, and relatively high incidences of bipolar debitage. General settlement and economic patterns described for the Early Woodland Period, such as an intensive riverine focus (Klein and Klatka 1991; McLearen 1991), are consistent with the data from the Kettering Park Site.

The Late Woodland Period of the Middle Atlantic region is marked by a change to a more sedentary lifestyle and a breakdown, at the end of the Middle Woodland Period, in the exchange system that distributed rhyolite (Custer 1984). The more sedentary lifeways of the Late Woodland peoples includes an increased dependence on agriculture, and an increase in site size. However, smaller, less permanent resource procurement sites continued to be used (Gardner 1982). The apparent decrease in the quantity of rhyolite in the Late Woodland horizon at the Kettering Park Site would certainly fit this pattern. Given that the Late Woodland occupation of the site appears to be smaller than that of the Early Woodland Period, it is possible that this site functioned as a less permanent procurement area.

In terms of intra-site use, data was obtained which suggested that potential activity areas were present. Among the activity areas that could be identified were those associated with lithic production. The isolation of areas with high concentrations of discrete material types and debitage related to production stages allowed for the identification of these areas. Excavation of the site into random units, however, precludes detailed discussion of horizontal distributions.

Lithic Raw Material Utilization and Implications for Trade and Exchange

The presence of non-local or so-called exotic lithic materials at a site indicates that the residents had access to these materials either through exchange or trips to the source of the material. As a general rule, parsimonious use of raw materials tends to be a reliable indicator of the value of that material in the economy of an occupation. Furthermore, evidence of the acquisition of non-local materials implies a knowledge of, or contact with, geographically diverse regions. The two exotic materials found in greatest quantity at the site were rhyolite and chert. The differential use of these materials may have chronological as well as economic and settlement implications.

Stewart's (1987) survey of rhyolite sources in Maryland and Pennsylvania found that rhyolite was imported from the Blue Ridge Mountains into southern Maryland and most of Virginia during the Late Archaic through Middle Woodland Periods. The general pattern in evidence in these areas is of a sharp drop in the percentage of rhyolite in lithic assemblage during the Late Woodland period, presumably a result of an increasingly sedentary lifeway (Stewart 1987). This decrease in usage is not ubiquitous, since the material continued to be important in portions of the western Maryland Piedmont through the Late Woodland Period. Sites in the inland coastal plain, such as the Kettering Park Site, are believed to follow the more generalized pattern.

Researchers in central Virginia noted a steady decrease in the use of rhyolite for projectile point manufacture: 9% of Middle Archaic points were made from exotic materials. During the Late Archaic the frequency drops to 6%, and during the Early Woodland 2% (Klein and Klatka 1991:166). The conclusion reached stated that "though exchange may have accounted for the redistribution of some raw materials, it is assumed... that the temporal patterns in lithic choice evident in the [Virginia] sample reflect trips to the source of the materials" (Klein and Klatka 1991:166). This view contrasts with that of Stewart (1987:53) who suggested that the use of rhyolite coincides with what appeared to be the first convincing evidence of trade in the Middle Atlantic. He found that most common artifacts recovered at quarry sites are those diagnostic of the Late Archaic to Middle Woodland Period. The question which remains is whether only certain groups were travelling to the source and then trading procured blanks, or whether each group was procuring its own material. As has been stated it is likely that some combination of these activities were carried out in this area.

The data from Kettering Park were difficult to interpret due to contextual mixing and the resulting lack of temporal controls on non-diagnostic artifacts. The frequency of occurrence of

rhyolite and chert debitage indicated the mixed nature of the deposits: in the A1 Horizon non-local raw materials constituted 14.9% of the total lithic material (9.8% chert and jasper, 5.1% percent rhyolite); the percentage for the A2 horizon was 8.3% (3% chert and jasper, 5.3% rhyolite). As Figure 51 indicates, rhyolite accounted for 9.9% of the bifaces at the site. Most of these were Late Archaic-Early Woodland projectile points, often small and heavily reworked. In total, 78% of these diagnostics were found buried beneath the plowzone (at level 4 N137/W101 -- a large quarry blank, and level 5 N130/W96 -- a weathered projectile point tip). Rhyolite debitage occurred in size and frequency consistent with tool refurbishing. Based on the incidence of rhyolite diagnostics, it may be that a substantial percentage of the rhyolite debitage was associated with the same Late Archaic-Early Woodland site use. The relative absence of rhyolite among Late Woodland diagnostics supports a general conformance to the accepted Middle Atlantic model of the decline in rhyolite use during the late portions of the Woodland Period.

Chert and jasper debitage was largely confined to the A1 horizon, and thus temporal associations were problematic. While this was the case, the production of Late Woodland projectile points of chert, especially a particular mustard color type, suggested that this raw material was used with some frequency during this period. Presumably much of the material was derived from external sources, probably from the nearest outcrops, in southeastern Pennsylvania. Local gravels would have provided an alternative, if not especially prolific, source. A low incidence of pebble cortex recorded in the debitage from the site suggested that, while local stream gravels were quarried for quartz pebbles, they were not an important source of crypto-crystalline material.

Figure 51: Material Utilization for Bifaces of All Types

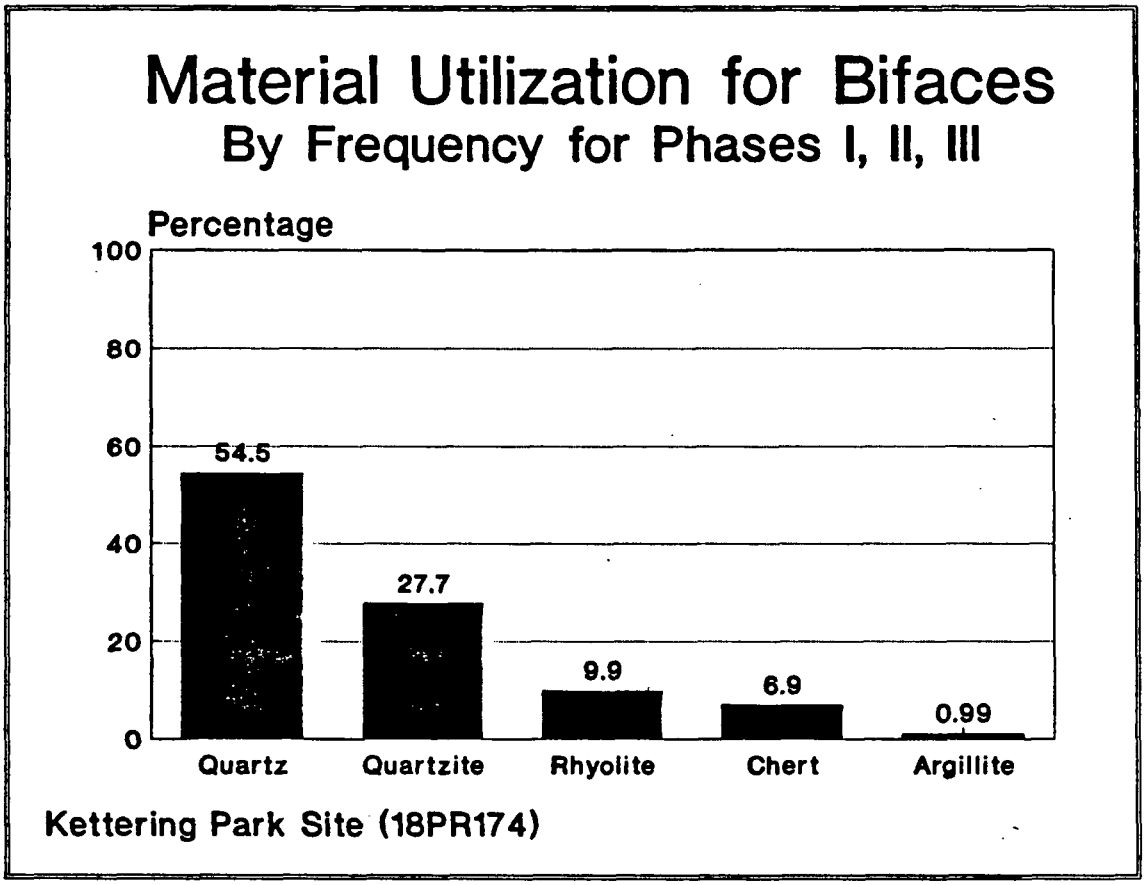

Assessment of Phase II Testing

The objectives of the Phase II testing program were to determine site integrity, site boundaries, cultural affiliation, and to evaluate the Kettering Park Site's eligibility for inclusion in the National Register of Historic Places. Based on systematic shovel testing, geomorphological information, and ground conditions, the boundaries of the Kettering Park Site were well established. Phase II testing at the Kettering Park site determined the presence of relatively intact prehistoric deposits underlying the A1 horizon, which were a humus, mixed plowzone, and sheetwash deposit. The testing established the presence of the relatively intact A2 horizon, which contained Late Archaic/Early Woodland materials. Although no features were identified, the site contained abundant evidence of lithic and ceramic materials in relatively intact deposits. Included in the prehistoric assemblage was a large sample of Accokeek ceramics. For these reasons, the Kettering Park Site could contribute to the settlement and technology themes of the Maryland Comprehensive Historic Preservation Plan. In addition, the

site was considered to be eligible for listing in the National Register of Historic Places under Criterion D because it has potential to yield important prehistoric information. In particular, the site was considered an important representative of occupation of the inland Maryland Coastal Plain during the Archaic and Woodland Periods.

Assessment of Phase III Research Goals

The 10% sampling (13 2x2-meter units) strategy of the Phase III excavations was a viable strategy, certainly obtaining a representative sample of ceramics and lithics from the A1 horizon and the intact A2 horizon. Most notably, the excavations at the Kettering Park Site obtained the largest sample of Accokeek ceramics of any site on the Patuxent drainage. The excavations also obtained a large sample of lithics from the A2 horizon. Particularly notable in this sample was the recovery of bipolar cores.

The data obtained through the Phase III excavations identified lithic manufacturing areas. The absence of features prevented a more detailed analysis of activity areas and the ability to determine whether the ceramics were brought into the site or manufactured there; however, the presence of a large ceramic sample indicated that food preparation activities probably took place.

The use pattern of non-local or exotic materials at the Kettering Park Site indicated that its Late Archaic, Early Woodland, and Late Woodland inhabitants had access to rhyolite and chert. Given the lack of precise contextual controls for much of the rhyolite and chert artifacts, determination of the mode of artifact movement (trade or direct procurement), was difficult to establish. Based on temporal diagnostics, during the Late Archaic/Early Woodland Periods, rhyolite was the preferred material. By the Late Woodland Period, there was a decrease in rhyolite frequency, and increase in the frequency of chert use. As has been discussed, this pattern is consistent with the general patterns known for the Middle Atlantic region as a whole. The shift in material presence between these periods is thought to be indicative of both a change in lifeways (to a more sedentary settlement pattern in the Late Woodland), and in the patterns of trade (Custer 1989).

Although the ceramic sample was relatively large for the area, it was too small for the formal definition of three varieties of Accokeek ceramics (Maureen Kavanagh, pers. comm., 1993). Instead, what has been provided is the outline for defining three wares: Accokeek Cord-Marked, Accokeek Mica-Tempered, and Accokeek Coarseware. Future research at sites with a larger sample of more complete vessels may provide and opportunity to further define three

Accokeek types. The Kettering research goals were met, thereby contributing to the Phase III research design objectives and to the settlement and technology themes of the Maryland Comprehensive Historic Preservation Plan.

Assessment of Impact and Recommendations

The location of the proposed right-of-way as indicated in Figure 3 had a direct impact on approximately 66% of the site. The Phase III mitigation obtained a statistically significant sample from the site (10%), thereby adequately mitigating the adverse affects of construction to the site. The State Highway Administration completed construction on the project.

REFERENCES CITED

Barber, R.
1979 *A Summary and Analysis of Cultural Resource Information on the Continental Shelf from the Bay of Fundy to Cape Hatteras, Final Report.* Institute for Conservation Archaeology, Peabody Museum, Harvard University.

Blaker, M.C.
1950 Pottery Types from the Townsend Site, Lewes, Delaware. *Eastern States Archaeological Federation Bulletin*, No. 9, July.

Boyce, H.L., and L.A. Frye
1986 Radiocarbon Dating of Archaeological Samples from Maryland. *Department of Natural Resources, Maryland Geological Survey, Archaeological Studies*, No. 4

Brennan, L.A.
1967 The Taconic Tradition and the Coe Axiom. *Bulletin of the New York State Archaeological Association* 14:12-25.

1982 A Compilation of Fluted Points of Eastern North America by Count and Distribution: An AENA Project. *Archaeology of Eastern North America* 10:27-46.

Callahan, E.
1979 The Basics of Biface Flintknapping in the Eastern Fluted Point Tradition: A Manual for Flintknappers and Lithic Analysts. *Archaeology of Eastern North America* 7:1-180.

Carbone, V.
1986 *Environment and Prehistory in the Shenandoah Valley.* Unpublished Ph.D. Dissertation, Catholic University, Washington, D.C.

Coe, J.L.
1964 *The Formative Cultures of the Carolina Piedmont.* Transactions of the American Philosophical Society 54(5).

Cooke, C.W., and E. Cloos
1951 *Geologic Map of Prince Georges County and the District of Columbia*, Maryland Department of Geology, Mines, and Water Resources.

Custer, J.F.

1984 *Delaware Prehistoric Archeology: An Ecological Approach.* University of Delaware Press, Newark.

1986 Late Woodland Cultural Diversity in the Middle Atlantic: An Evolutionary Perspective. In *Late Woodland Cultures of the Middle Atlantic Region*, edited by J. Custer, pp. 143-168. University of Delaware Press, Newark.

1989 *Prehistoric Cultures of the Delmarva Peninsula.* University of Delaware Press, Newark.

Custer, J.F., and D. Bachman

1986 Analysis of Projectile Point Morphology, Use Wear, and Activity Areas at the Hawthorn Site (7NC-E-46), New Castle County, Delaware. *Journal of Middle Atlantic Archaeology* 2:37-62.

Custer, J.F., and C.A. DeSantis

1985 Preliminary Investigations at the Mitchell Farm Site (7NC-A-2), New Castle County, *Pennsylvania Archaeologist* 55(4):30-40.

Custer, J.F., J. Ilgenfritz, and K.R. Doms

1988 Application of Blood Residue Analysis Techniques in the Middle Atlantic Region. *Journal of Middle Atlantic Archaeology* (4):99-104.

Delcourt, P.A., and H.R. Delcourt

1981 Vegetation Maps for Eastern North America: 40,000 yr B.P. to the Present. In *Geobotany II*, edited by R.C. Romans, pp. 123-165. Plenum Press, New York.

Dinnel, K.J. and M. Kavanagh

1990 Ceramics at the Kettering Park Site, a manuscript prepared for the current report.

Ebright, C.A.

1985 *Final Report on Prehistoric Investigations at Four Sites in Texas Valley, Rocky Mountain Pumped Storage Project, Floyd County, Georgia.* Report submitted to the Georgia Power Company.

1991 *Archeological Teting at the O'Barr Site, Prince George's County, Maryland.* Maryland State Highway Administration, Archeological Report Number 10. Maryland Geological Survey, Division of Archeology, File Report Number 252.

1992 *Early Native American Prehistory in the Maryland Western Shore: Archeological Investigations at the Higgins Site.* Maryland State Highway Administration, Archeological Report Number 1, Report Prepared for the Maryland State Railroad Administration.

Egloff, K.
1991 Development and Impact of Ceramics in Virginia. In *Late Archaic and Early Woodland Research in Virginia: A Synthesis*, edited by T.R. Reinhart and M.E.N. Hodges, pp. 243-252. Virginia Archaeological Society, Special Publication No. 23.

Egloff, K.T., and S.R. Potter
1982 Indian Ceramics from Coastal Plain Virginia. *Archaeology of Eastern North America* 10:95-117.

Epperson, T.W.
1979 *Archeological Reconnaissance of Central Avenue (Maryland Route 214) From the Capital Beltway (I-495) To Hall, Prince Georges County, Maryland.* Report submitted to the Maryland State Highway Administration. Maryland Geological Survey, Division of Archaeology, File Report Number 150.

Evans, J.
1984 Late Archaic Projectile Points in the Middle Atlantic: What's in a Name? Paper presented at the Middle Atlantic Archeological Conference, Rehoboth Beach.

Froomer, N.L.
1980 Sea Level Changes in the Chesapeake Bay During Historic Times. *Marine Geology* 36:289-305.

Gardner, W.M.
1974 The Flint Run Complex: Pattern and Process During the Paleo-Indian to Early Archaic. In *The Flint Run Paleo-Indian Complex: A Preliminary Report 1971-73 Seasons*, edited by W.M. Gardner, pp. 5-47. Occasional Publication Number 1, Archeology Laboratory, Department of Anthropology, The Catholic University of America.

1979 Paleo-Indian Settlement Patterns and Site Distribution in the Middle Atlantic. Paper presented to the Anthropological Society of Washington, D.C., Washington, D.C.

1982 Early and Middle Woodland in the Middle Atlantic: An Overview. In *Practicing Environmental Archaeology: Methods and Interpretations*, edited by R.W. Moeller, pp. 53-86. American Indian Archaeological Institute, Washington, Connecticut.

1989 An Examination of Cultural Change in the Late Pleistocene and Early Holocene (circa 9200 to 6800 B.C.). In *Paleoindian Research in Virginia: A Synthesis*, edited by J.M. Wittkofski and T.R. Reinhart, pp. 5-51. Archeological Society of Virginia, Special Publication No. 19.

Gleach, F.W.
1985 A Compilation of Radiocarbon Dates with Applicability to Central Virginia. *Quarterly Bulletin, Archeological Society of Virginia* 40:180-200.

1987 A Working Projectile Point Classification for Central Virginia. Archeological Society of Virginia, *Quarterly Bulletin, Archeological Society of Virginia* 42(2):80-120.

Griffith, D.R.
1982 Prehistoric Ceramics in Delaware (An Overview). *Archaeology of Eastern North America* 10:46-68

Handsman, R.G., and C.W. McNett
1974 The Middle Woodland in the Middle Atlantic: Chronology, Adaptation and Contact. Paper presented at the Middle Atlantic Archeological Conference, Baltimore.

Hranicky, W.J.
1991 *Projectile Point Typology and Nomenclature for Maryland, Virginia, West Virginia and North/South Carolina.* Archeological Society of Virginia, Special Publication Number 26.

Hranicky, W.J., and F. Painter
1988 *A Guide to the Identification of Virginia Projectile Points.* Special Publication No. 17, Archaeological Society of Virginia, Richmond, Virginia.

Humphrey, R.L., and M.E. Chambers
1977 *Ancient Washington: American Indian Cultures of the Potomac Valley.* George Washington University Studies No. 6, Second edition.

Inashima, P.Y.
1989 *Archeological Excavations at Seven South District Sites in Shenandoah National Park, Virginia.* National Park Service, Denver Service Center, Eastern Team, Applied Archeology Center, Rockville, Maryland.

Johnson, A.F.
1968 New Dates for the Archaic. *Quarterly Bulletin, Archeological Society of Virginia* 22:172.

Johnson, M.F.

1985 *Prehistory of Fairfax County, Virginia: The Piscataway Point Type in Hunters Branch, Site 44FX266 and Others.* Fairfax County Archaeological Survey, Office of Comprehensive Planning, Fairfax, Virginia.

1986 *The Prehistory of Fairfax County: An Overview.* Heritage Resources Branch, Falls Church, Virginia.

Joyce, A.A.

1988 Early/Middle Holocene Environments in the Middle Atlantic Region: A Revised Reconstruction. In *Holocene Human Ecology in Northeastern North America*, edited by G.P. Nicholas, pp. 185-214. Plenum Press, New York.

Kavanagh, M.

1982 *Archaeological Resources of the Montgomery River Region, Frederick and Carroll Counties, Maryland.* Maryland Geological Survey, Division of Archeology, File Report No. 164.

n.d. Phase II Archeological Investigations at the Kettering Park Site (18PR174), Prince Georges County, Maryland. Draft report, Maryland Geological Survey, Division of Archeology.

Kavanagh, M., and C.A. Ebright

1988 *Archaeological Testing of Four Prehistoric Sites in Town Creek Valley, Allegheny County Maryland.* Report Submitted to the Maryland State Highway Administration. Maryland Geological Survey, Division of Archeology, File Report Number 216.

Kinsey, W.F.

1959 Recent Excavations on Bare Island in Pennsylvania, The Kent-Halley Site. *Pennsylvania Archaeologist* 29:109-133.

1972 *Archeology in the Upper Delaware Valley.* The Pennsylvania Historical and Museum Commission, Harrisburg.

Kirby, R.M, M.S. Mathews, and M.A. Bailey

1967 *Soil Survey of Prince Georges County, Maryland.* Soil Conservation Service.

Klein, M.J., and T. Klatka

1991 Late Archaic and Early Woodland Demographic Patterns. In *Late Archaic and Early Woodland Research in Virginia: A Synthesis*, edited by T.R. Reinhart and M.EN. Hodges, pp. 139-184. Virginia Archaeological Society, Special Publication No. 23.

Kondolf, G.M.
1983 *Pedology and Geomorphology of the Kettering Site Prince Georges County, Maryland*, Report appended to this volume. Johns Hopkins University, Baltimore, Maryland.

Kraft, J.C., and C.J. John
1978 Paleographic Analysis of Coastal Archaeological Settings in Delaware. *Archaeology of Eastern North America* 6:41-60.

LeeDecker, C.H., B. Koldehoff, C.A. Holt, D.P. Wagner, G.S. Brush, and M. Newman
1991 *Excavation of the Indian Creek V Site: An Archaic Gathering Camp in the Maryland Coastal Plain*. Louis Berger and Associates, Inc., prepared for Wallace, Roberts and Todd and Washington Metropolitan Area Transit Authority.

Lippson, A.F., M.S. Haire, A.F. Holland, F. Jacobs, J. Jensen, R.L. Moran-Johnson, T.T. Polgar, and W.A. Richkus
1979 *Environmental Atlas of the Potomac Estuary*. Environmental Center, Martin Marietta Corporation.

Lopez, J.
1971 Pottery from the Mispillion Site. In *Foundations of Pennsylvania Prehistory*. edited by B.C. Kent, I.F. Smith and C. McCann, pp. 339-379. Anthropological Series of the Pennsylvania Historical and Museum Commission, Number 1, Harrisburg.

Mack, F.K.
1966 *Ground Water in Prince Georges County*. Maryland Geological Survey, Bulletin 29.

Manson, C.
1948 Marcey Creek Site: An Early Manifestation in the Potomac Valley. *American Antiquity* 13:223-227.

McCary, B.C.
1953 The Potts Site, Chickahoming River, New Kent County, Virginia. *Quarterly Bulletin*, Archeological Society of Virginia 8:1.

McDowell, E.E.
1972 *The Archaic Stage of the Potomac River Piedmont: A Techno-Ecological Approach to Archeological Data*. Unpublished Ph.D. Dissertation, American University, Washington, D.C.

McLearen, D.C.
1991 Late Archaic and Early Woodland Material Culture in Virginia. In *Late Archaic and Early Woodland Research in Virginia: A Synthesis*, edited by T.R. Reinhart and M.E.N. Hodges, pp. 1-88. Virginia Archaeological Society, Special Publication No. 23.

McNamara, J.M.
1981 *Guidelines for Archeological Investigations in Maryland.* Maryland Historical Trust Technical Report Number 1.

McNett, C.W., and W. Gardner
n.d. Archeology in the Lower and Middle Potomac. On file, Department of Anthropology, American University, Washington, D.C.

Moore, L.E.
1990 The Early Prehistory of the Upper Wolf Trap Drainage. Paper presented at the Middle Atlantic Archeological Conference, Ocean City.

1992 Down in the Uplands. *Quarterly Bulletin, Archeological Society of Virginia* 47(3):129-139.

Mouer, L.D.
1991 The Formative Transition in Virginia. In *Late Archaic and Early Woodland Research in Virginia: A Synthesis*, edited by T.R. Reinhart and M.E.N. Hodges, pp. 1-88. Virginia Archaeological Society, Special Publication No. 23.

Mouer, L.D., R.L. Ryder, and E.G. Johnson
1981 *The Elk Island Tradition: An Early Woodland Regional Society in the Virginia Piedmont.* Paper presented at the Middle Atlantic Archeological Conference, Ocean City.

National Preservation Institute
1983 *Barney Circle Freeway Modification Study: Archaeology. Final Technical Report Number 12.* Prepared for District of Columbia Department of Transportation and United States Department of Transportation Federal Highway Administration.

Neill, E.D. (editor)
1876 *A Brief Journal of a Voyage Made in the Bark Warwick to Virginia and other Parts of the Continent of America by Henry Fleet in the Founders of Maryland.* Joel Munsell, Albany.

Peck, D., and T. Bastian
1977 Test Excavations at the Devilbiss Site, Frederick County, Maryland. *Maryland Archeology* 13(2):1-10.

Potter, S.R.
1982 *An Analysis of Chicoan Settlement Patterns.* Unpublished Ph.D. Dissertation, University of North Carolina, Chapel Hill.

Redman, C.L.
1975 Productive Sampling Strategies for Archaeological Sites. In *Sampling in Archaeology*, edited by J.W. Mueller, pp. 147-154. University of Arizona Press, Tucson.

Reeve, S.A.
1992 Changes in Time: A Seriation Chronology for Southern Maryland Projectile Points. *Journal of Middle Atlantic Archaeology* 8:107-137.

Ritchie, W.A.
1959 The Stony Brook Site and Its Relation to Archaic and Transitional Cultures on Long Island. *New York State Museum and Science Service Bulletin* 372.

1965 *The Archaeology of New York State.* Natural History Press, Garden City, New York.

1971 *A Typology and Nomenclature for New York Projectile Points*, New York State Museum and Science Bulletin No. 384, Albany, New York.

1979 Some Regional Ecological Factors in the Prehistory of Man. *The Bulletins of the New York State Archeological Association* 75:14-23.

Rue, D.J., and C.A. Bergman
1991 Contemporaneity of Late Archaic Piedmont Projectile Point Forms: The Woodward Site (36-CH-374), Chester County, Pennsylvania. *Journal of Middle Atlantic Archaeology* 7:127-154.

Sears, W.H.
1948 What is the Archaic? *American Antiquity* 14:122-124.

Snow, D.
1978 Late Prehistory of the East Coast. In *Northeast*, edited by W.C. Sturtevant, pp. 58-69. Handbook of North American Indians, Vol. 15. Smithsonian Institution, Washington, D.C.

Snyder, K., and W. Gardner
1979 *A Preliminary Archaeological Resource Reconnaissance of Proposed Sewer Lines in the Rock Run Area, Montgomery County, Maryland.* Thunderbird Research Corporation, Front Royal, Virginia.

Stephenson, R.L., and A.L.L. Ferguson
1963 The Accokeek Creek Site: A Middle Atlantic Seaboard Culture Sequence. *Anthropological Papers, Museum of Anthropology, University of Michigan* No. 20.

Steponaitis, L.C.
1980 *A Survey of Artifact Collections from the Patuxent River Drainage, Maryland.* Maryland Historical Trust Monograph Series No. 1, Annapolis, Maryland.

1986 *Prehistoric Settlement Patterns in the Lower Patuxent River Drainage, Maryland.* Unpublished Ph.D. Dissertation, SUNY Binghamton.

Stewart, R.M.

1982 Prehistoric Ceramics of the Great Valley of Maryland. *Archaeology of Eastern North America* 10:69-94.

1987 Rhyolite Quarry and Quarry-Related Sites in Maryland and Pennsylvania. *Archaeology of Eastern North America* 15:47-57.

Stuvier, M., and J.J. Daddario
1963 Submergence of the New Jersey Coast. *Science* 142:951.

Turner, E.R.
1978 An Intertribal Deer Exploitation Buffer Zone for the Virginia Coastal Plain-Piedmont Regions. *Quarterly Bulletin, Archeological Society of Virginia* 32(3):45-64.

Wanser, J.C.
1982 A Survey of Artifact Collections from Central Southern Maryland. *Maryland Historical Trust Manuscript Series* 3.

Waselkov, G.A.
1982 *Shellfish Gathering and Shell Midden Archaeology.* Unpublished Ph.D. Dissertation, University of North Carolina. Chapel Hill.

Wesler, K.W.
1983 Typology and Sequence in the Maryland Archaic. *Southeastern Archaeology* 2(1):21-29

Wesler, K.W., D.J. Pogue, A. Luckenbach, G.F. Fine, P.A. Sternhammer, and E. G. Furguson
1981 The M/Dot Archaeological Resource Survey, Volume 2: Western Shore. *Maryland Historical Trust Monograph Series 6.*

Willey G.R., and P. Phillips
1958 *Method and Theory in American Archaeology.* University of Chicago Press, Chicago.

Winfree, R.W.
1967 The T. Gray Haddon Site, King William County, Virginia (44KW04). *Quarterly Bulletin, Archeological Society of Virginia* 22:2-26.

Witthoft, J.
1953 Broad Spearpoints and the Transitional Period Cultures. *Pennsylvania Archaeologist* 23(1):4-31.

Wright, C.
1977 *Port O' Bladensburg: A Brief History of a 1742 Town.* Bicentennial Committee of the Town of Bladensburg.

Wright, H.T.
1973 *An Archeological Sequence in the Middle Chesapeake Region, Maryland.* Maryland Geological Survey, Archeological Studies No. 1.

APPENDICES

Appendix A
List of Personnel

DIVISION OF ARCHEOLOGY

Field Directors

Maureeen Kavanagh, M.A.
Silas Hurry, B.A.

Field Crew

Stephanie Crockett
Katherine Dinnel
Timothy Doyle
Elizabeth Leigh Hutchenson
William Huser
Janet Gillis
Alison Helms
Timothy Sara

Ceramic Analysts

Katherine Dinnel, M.A.
Maureen Kavanagh, M.A.

Lithic Analyst

Carol Ebright, M.A.

ENGINEERING-SCIENCE

Program Manager

Janice G. Artemel, M.A.

Project Manager

Michael D. Petraglia, Ph.D.

Project Archaeologists

Heidy Fogel, Ph.D.

Laboratory Archaeologist

Carter Shields

Graphics

Sulah Lee

Typist

Monica Puebla

Technical Editors

Mary Pickens
Roberta Brown

Biographical Data

MICHAEL D. PETRAGLIA, Ph.D.

Senior Archaeologist

EXPERIENCE SUMMARY

Eleven years of experience as an archaeologist in the eastern and western United States in compliance with Section 106 of the National Historic Preservation Act, as amended, and other federal, state and local legislation, as well as work in France and India. Responsibilities have included project direction, design and implementation, field and laboratory supervision, artifact analysis, archival research and report writing. Technical responsibilities include environmental and site compiance assessments, NEPA documentation of cultural resources as part of environmental assessments (EAs) and environmental impact statements (EISs), cultural resource reviews and plans, baseline surveys, and site characterizations.

EXPERIENCE RECORD

1988-Date Engineering-Science. **Project Manager/Senior Archaeologist**. Responsible for project management, research design, archival research, field direction, analysis and report writing in compliance with Section 106 of the National Historic Preservation Act and the National Environmental Protection Act (NEPA). He has directed projects in the United States, including urban and rural areas for private clients and public agencies. These projects have included Phase I, II and III investigations of both historic and prehistoric sites.

Representative projects include: Phase I, II and III work at the South River Colony in Anne Arundel County, Maryland; for the CNG Transmission Corporation in Loudoun, Prince William and Fauquier Counties, Virginia, and Beaver, Butler, and Armstrong Counties, Pennsylvania; the Potomac Interceptor Pipeline in Loudoun County, Virginia, and the Russett Development project in Maryland; Phase I surveys at Camp Stanley and Kelly and Lackland Air Force Bases, all in Texas; for the Maryland DOT on the Westminster Bypass; for the Transcontinental Gas Pipe Line Corporation at the M & R Station in South Carolina; Kirtland Air Force Base in New Mexico; the PEPCO Pipeline project in Montgomery County, Maryland; the Martin State Airport project in Baltimore County, Maryland; and the Baltimore-Washington International Airport in Anne Arundel County, Maryland. Phase I/II testing program for the CSX Rail Yards in Alexandria, Virginia; and Phase II surveys at Mexico Farms in Allegeny County, Maryland, and at Dulles International Airport, Fairfax and Loudoun Counties, Virginia.

1987-Date National Museum of Natural History, Department of Anthropology, Smithsonian Institution, Washington, D.C..**Research Associate**. Research on African, European, and Asian collections, Archaeological investigation in India.

1982-1987 University of New Mexico, Department of Anthropology, Albuquerque, New Mexico. **Instructor, Teaching Assistant, and Research Aide.**

1986 University of New Mexico, Department of Anthropology, Albuquerque, New Mexico. **Field Supervisor and Researcher**. Excavation of the Abri Dufaure, France, and laboratory analysis at the Musee D'Arthous, France.

1979-83 **Crew Member.** Projects in Nevada, New York, New Mexico, and Montana.

EDUCATION

B.A. in Anthropology (honors), Minor History, 1982, New York University, New York
M.A. in Anthropology, 1984, University of New Mexico, Albuquerque
Ph.D. in Anthropology, 1987, University of New Mexico, Albuquerque

PAPERS AND PUBLICATIONS (selected)

"Formation Processes and the Prehistoric Record in India," presented at the International Society for Prehistoric and Quaternary Studies meeting, 1992.

"Survey and Excavation of Prehistoric Sites in Northern Virginia," presented at the Eastern States Archeological Federation, 1991.

"Archaeological Survey and Excavations at the South River Colony: A Look Beyond Annapolis," presented at the Anne Arundel Archaeology Conference, 1991.

"Natural Formation Processes and the Archaeological Record in the Middle Atlantic Region," presented at the Middle Atlantic Archaeological Conference, 1991.

"Stone Artifact Refitting: Quarry Processing and Tool Manufacture in Prehistoric Sites in Maryland and Virginia," presented at the Middle Atlantic Archaeological Conference, 1991.

"Archaeological Survey, Testing, and Excavation of Prehistoric Sites at Russett, Maryland," presented at the Anne Arundel County Archaeology Conference, 1991.

"Archaeological Investigations near Leesburg, Virginia," presented at the Middle Atlantic Archaeological Conference, 1990.

"Taphonomy of Experimental Faunal Assemblages: A Case Study from Jemez, New Mexico," presented at the International Conference on Archaeozoology, 1990.

"An Artist's Palette from the Grotte de Tarte, Haute Garonne, France," *Bulletin de la Societe Prehistorique de L'Ariege et Pyrenees*, 1992 (coauthors Dr. R. Potts and Dr. P. Vandiver).

Formation Processes in Archaeological Context, Prehistory Press, in prep, 1993 (coeditors Dr. P. Goldberg and D. Nash).

"The Old World Paleolithic Collections of the Department of Anthropology, National Museum of Natural History," *Smithsonian Contributions to Anthropology*, in prep, 1993 (coauthor Dr. R. Potts).

"Processus de Formation du Gisement," *L'Abri Dufaure: Un Gisement Tardiglaciaire en Gascogne*, edited by Dr. L.G. Straus, Societe Prehistoire Francaise, monograph in press, 1992.

"Remontages," *L'Abri Dufaure: Un Gisement Tardiglaciaire en Gascogne*, edited by Dr. L.G. Straus, Societe Prehistoire Francaise, monograph in press, 1992.

"Stone Artifact Refitting and Formation Processes at the Abri Dufaure, An Upper Paleolithic Site in Southwestern France," *Piecing Together the Past: Applications of Refitting Studies in Archaeology*, edited by J.L. Hofman and J.G. Enloe. British Archaeological Reports, International Series, Oxford, 1992.

"The Genesis and Alteration of Archaeological Patterns at the Abri Dufaure: An Upper Paleolithic Rockshelter and Slope in Southwestern France," *Formation Processes in Archaeological Context*, Prehistory Press, in prep, 1993 (coeditors Dr. P. Goldberg and D. Nash).

"Water Flow and the Formation of Early Paleolithic Sites in Olduvai Gorge, Tanzania," to be submitted to the *Journal of Archaeological Science*, in preparation, 1992 (coauthor Dr. R. Potts)

"Two Mortars from La Madeleine, Dordogne, France," *L'Anthropologie*, 1991 (coauthor Dr. R. Potts).

"Terminal Pleistocene Adaptations in Pyrenean France: The Nature and Role of the Abri Dufaure Site (Sorde L'Abbaye, Les Landes)," *World Archaeology* 19(3): 328-348, 1988 (coauthors Dr. L.G. Straus, K. Akoshima, and M. Seronie-Vivien).

"Preface," *Natural Formation Processes and the Archaeological Record*, edited by D.T. Nash and M.D. Petraglia, pp. v-vi. British Archaeological Reports, International Series, Oxford, 352, 1987.

"The Impact of Fluvial Processes on Experimental Sites," *Natural Formation Processes and the Archaeological Record*, edited by D.T. Nash and M.D. Petraglia, pp. 108-130. British Archaeological Reports, International Series, Oxford, 352, 1987.

Site Formation Processes at the Abri Dufaure: A Study of Upper Paleolithic Rockshelter and Hillslope Deposits in Southwestern France. Ph.D. Dissertation, University of New Mexico. University Microfilms International, Ann Arbor, Michigan, 1987.

"Site Formation Processes and Lithic Refitting at the Abri Dufaure," *Anthroquest* 34: 15-16, 1986.

"Abri Dufaure Prehistoric Project, 1985," *Old World Archaeology Newsletter* 9(3): 10-13, 1985 (coauthor Dr. L.G. Straus).

"Natural Disturbance Processes: A Preliminary Report on Experiments in Jemez Canyon, New Mexico". *Haliksai: University of New Mexico Contributions to Anthropology* 3: 129-147 , 1984 (coauthor D. Nash).

"The History of Welwyn Preserve," *Long Island Forum* 46(8): 150-157, 1983.

Natural Formation Processes and the Archaeological Record. British Archaeological Reports, International Series, Oxford, 352 ,1987 (coauthor D.T. Nash).

Biographical Data

HEIDY FOGEL, Ph.D.

Senior Archaeologist

EXPERIENCE SUMMARY

More than fourteen years of experience in prehistoric and historical archaeological projects in the United States, South America and the Middle East. Cultural resource projects have been conducted in compliance with Section 106 of the National Historic Preservation Act of 1966 and other federal, state and local legislation. Responsibilities have included the design, direction, organization, and implementation of large-scale archaeological projects; field and laboratory supervision, curatorial experience, artifact analysis, site interpretation, report writing and archaeological illustration.

EXPERIENCE RECORD

1993-Date	Engineering-Science. **Senior Archaeologist** Responsibilities include the supervision and direction of historical and prehistoric archaeological projects in the eastern United States. Studies include those in compliance with Section 106 of the National Historic Preservation Act and National Environmental Protection Act, as well as state and local legislation. Currently preparing Phase III report for Kettering site, Prince Georges County, Maryland.
1992	Yale University, Peabody Museum of Natural History, New Haven, Connecticut. **Curatorial Assistant.** Researched and wrote the preliminary text for exhibition of North American Indian Weaponry, catalogued collections from North, South and Central America, and researched the publication of the museum's North American Indian collection.
1991	Dumbarton Oaks (Trustee for Harvard University), Washington, DC. **Junior Research Fellow.** Dissertation research.
1990	**Fulbright Scholar**, Trujillo, Peru. Director of the Gallinazo Occupation of the Moche Valley Project.
1988-1990	NEH Grant, New Haven, Connecticut. **Archaeological Illustrator** for Tell-Leilan Project (Syria). Illustrated artifacts, maps and plans; coordinated authors in the preparation of publications, grants and documents for meetings.
1987-1988	Ernie Wiggand Associates, Connecticut. **Archaeologist.** Conducted several prehistoric and historical archaeological projects in New England.
1987	Yale University, New Haven, Connecticut. **Director** for archaeological survey of the Viru Valley, Peru.
1986-1987	Raber Associates, Glastonbury, Connecticut. **Archaeologist.** Conducted a several prehistoric and historical archaeological projects in Massachusetts, Connecticut and New York.
1985	Yale University, New Haven, Connecticut. **Director** for archaeological survey of the Viru Valley, Peru.
1983-1988	Yale University, Peabody Museum of Natural History, New Haven, Connecticut. **Curatorial Assistant.** Participated in a variety of projects associated with the cataloguing and maintenance of collections.

1982	Proyecto Chimu Sur Project, Casma, Peru. **Staff Artist and Archaeologist.** Acted as staff artist illustrating stratigraphy, features, maps and artifacts and conducted archaeological excavation.
1980-1982	Harvard University, Peabody Museum, Institute for Conservation Archaeology, Cambridge, Massachusetts. **Archaeological Illustrator.** Illustrated artifacts, features, profile drawings and plan views and site maps for numerous prehistoric and historical archaeological projects conducted in compliance with Section 106 of the National Historic Preservation Act of 1966.
1980	Smithsonian Institution, Lamb Spring Project, Littleton, Colorado. **Archaeologist.** Participated in the excavation of this site.
1979	Harvard University, Peabody Museum, Mount Jasper Project, New Hampshire. **Crew Chief.** Supervised the survey and mapping of a quarry site in northern New Hampshire.
1979	Rockefeller and Israel Museums, Jerusalem, Israel. **Crew Chief.** Supervised the survey and mapping of sites in Israel.
1978	Grosvenor Museum, Chester, England. **Archaeological Illustrator and Exhibits Assistant.** Illustrated artifacts and assisted in the preparation of exhibits.

EDUCATION

Ph.D., Anthropology, 1993, Yale University, New Haven, Connecticut

M.Phil., Anthropology, 1987, Yale University, New Haven, Connecticut

M.A., Anthropology, 1987, Yale University, New Haven, Connecticut

Special Graduate Student, Department of Anthropology, 1981, Harvard University, Cambridge, Massachusetts

B.F.A., 1978, Rhode Island School of Design, Providence, Rhode Island

PUBLICATIONS AND PAPERS PRESENTED (SELECTED)

"The Gallinazo Group," "The Gallinazo Culture," and "The Vicus Culture," entries for the *Encyclopedia of Latin American History*, Charles Scribner & Sons, New York. In press.

"Reconsidering the Chronology and Political Organization of the Gallinazo Culture" Manuscript in preparation solicited by *Latin American Antiquity*, a journal of the Society of American Archaeology.

Review of *The Northern Dynasties: Kingship and Statecraft in Chimor*, ed. by Michael E. Moseley and Alana Cordy Collins. *Journal of Field Archaeology*, 1992.

"The Gallinazo Occupations of the Viru and Moche Valleys, Peru." Paper presented at Dumbarton Oaks, 1990.

"Reconsidering the Chronology and Political Organization of the Gallinazo Culture" Paper presented at the Northeast Conference on Andean Archaeology and Ethnohistory, 1989.

Biographical Data

DENNIS A. KNEPPER

Archaeologist

EXPERIENCE SUMMARY

Ten years of experience as an archaeologist in the Southeast, Southwest and Mid-Atlantic regions of the United States, including numerous prehistoric and historical survey (Phase I), testing (Phase II), and data recovery (Phase III) projects in compliance with Section 106 of the National Historic Preservation Act as amended for regulatory compliance with FHWA, FERC, GSA, USACOE and other federal and state agencies. Responsibilities have included project design and implementation, field and laboratory supervision, artifact analysis, archival research and report writing.

EXPERIENCE RECORD

1986-Date Engineering-Science. **Archaeologist**. Served as project archaeologist, principal investigator, field director, project manager, crew chief and excavator on more than 40 archaeological Phase I, II and III projects within the northeastern and southeastern states. These projects included both historic and prehistoric sites, in urban and rural areas, including deeply buried sites along riverbanks and under twentieth-century urban fill. Responsibilities have included project design and administration, field direction and supervision, artifact analysis, historical research and report writing.

Representative projects include Phase I, II, and III investigations of historical and prehistoric sites along a 56-mile natural gas transmission line corridor in western Pennsylvania; Phase I, II, and III investigations of prehistoric sites along a 30-mile natural gas transmission line in northern Virginia; Phase III maritime data recovery at Keith's Wharf, Alexandria, Virginia; Phase III study of Lanes Mill, Fairfax County, Virginia; Phase I and II surveys of prehistoric sites at proposed federal courthouse site in Prince Georges County, Maryland; Phase III excavations at the prehistoric and historical sites of the new correctional treatment facility in Washington, D.C.

1985 Virginia Research Center for Archaeology/Mt. Vernon. **Field Crew/Laboratory Analyst.** Data recovery excavations within the North Grove/Blacksmith's Shop at Mt. Vernon.

1983 University of Texas at San Antonio Colha Project/Northern Belize **Crew Chief.** Mayan lithic tool production site; assisted in directing excavations within two separate ceremonial centers.

1982 University of Texas at San Antonio **Field Crew and Lab Analyst.** CAR Blue Bayou Project -- late prehistoric burial site, South Texas; CAR East Chacon/Exxon Survey, prehistoric site survey of 30,000-acre tract, South Texas; CAR Brooks County/Chevron Survey, Phase I prehistoric site survey, South Texas.

Southern Texas Archaeological Association. **Crew Chief.** Kendall County Survey -- Phase I survey of prehistoric site.

University of Texas at San Antonio/CAR Fort Sam Houston Cemetery Survey -- **Field Crew.** Phase I backhoe testing. Center for Archaeological Research Guenther's Mill Project --**Field Crew** Phase III mitigation and conservation of mill race on San Antonio River.

1981 University of Texas at San Antonio Field School. **Field School Student.** Phase III excavations at Late Prehistoric occupation site within Choke Canyon Resevoir, South Texas.

EDUCATION

B.A. in History (summa cum laude), 1977, Texas Christian University, Fort Worth, Texas

PROFESSIONAL AFFILIATIONS

Alexandria Archaeology
Archaeological Society of Virginia
Archaeological Society of Maryland
Eastern States Archaeological Federation
Northern Virginia Chapter/ASV
Phi Beta Kappa
Society for American Archaeology
Society for Historical Archaeology
Texas Archeological Society

PAPERS AND PUBLICATIONS

"Test Excavations at Lanes MIll (44FX46), Fairfax County, Virginia," *Quarterly Bulletin of the Archaeological Society of Virginia*, 47(4):145-161, 1992.

"Further Notes on the Lithics from the Plainview Occupation at the St. Mary's Hall Site, South Central Texas," *La Tierra, Quarterly Journal of the Southern Texas Archaeological Association*, 18(3):1-6, 1991 (coauthor Thomas R. Hester).

Wharves, Barges and Railways: An 18th and 19th Century Site in Alexandria, Virginia,. presented at the annual meeting of the Society for Historical Archaeology, 1991 (coauthors Janice G. Artemel and Marilyn Harper).

"Test Excavations at Operation 2036," *Interim Report of the Colha Project: 1983 Season*, Thomas R. Hester, Richard E.W. Adams and Jack D. Eaton eds. Center for Archaeological Research, The University of Texas at San Antonio.

Appendix B
Soil Report

G. MATHIAS KONDOLF
GEOLOGY • HYDROLOGY • WATER RESOURCES

PEDOLOGY AND GEOMORPHOLOGY
of the
KETTERING SITE
Prince Georges County, Maryland

submitted 18 May 1983

Dept. of Geography and Environmental Engineering
The Johns Hopkins University
Baltimore, MD 21218
Phone (301) 366-6639
Messages: (301) 338-7092

SITE DESCRIPTION

The Kettering site is located on a low alluvial terrace, about 60 x 80 m, on the south side of Maryland Rte. 214 between Largo and Kolbes Corner (Figure 1). The site, at the confluence of the Western and Northeastern Branches of the Patuxent river, is underlain by Quaternary fluvial sands and gravels of the Wicomico Formation (Cooke and Cloos, 1951). The surrounding coastal plain uplands are underlain largely by the Tertiary Aguia greensand (a green glauconitic sand) and by less extensive outcrops of the Tertiary Chesapeake group (light grey diatomaceous earth and fine pebble sand) <Cooke and Cloos, 1951>. Soils developed on the uplands are mapped as Collington fine sandy loams (Kirby et al, 1967). Stream gradients are gentle and relief is subdued. The site was once farmed, reforested, and recently partially cleared to leave an open, park-like stand of trees, primarily Beech, of typically 25-30 cm diameter.

PARENT MATERIAL

The parent material upon which soil has formed consists primarily of well sorted fine and medium sand, with lesser occurrences of gravelly sand, sandy gravel, and silty sand. The deposits are interpreted as fluvial deposits of the Western and Northeastern Branches, and possibly of a small tributary that drained the upland to the north and once joined the Northeastern Branch near the eastern margin of the site. A road now occupies this draw, so it is difficult to reconstruct the paleodrainage to assess the possible contribution of sediment from this stream to the alluvium at the site.

Changes in parent material size are believed to be responsible for the sharp contacts observed in some profiles (from sand to gravel, and from sand to silty sand). However, most soil development has occurred on a massive fine-medium well-sorted sand that extends to depths of 1 m in most profiles. This sand lacks evidence of primary sedimentary structure or textural change. Fine sands deposited in the backwaters of major floods could be responsible for a massive primary depositional structure. Conceivably, the sand could have been deposited as one event. Alternately, sequential events could be responsible, with all primary stratification since lost to soil development.

Stratigraphic relations below the sand are complex. Gravels suggest that paleochannels (former channels) crisscrossed the site, but more deep holes would be required to map these former

channels. A more recent gravel occurs at a depth of 40 cm in auger hole N80 W100. A fresh-looking fragment of glass was found here at a depth of 70 cm; it was dated as post 1923 on the basis of its lettering (a portion of "reuse of this bottle is prohibited ...") and probably post 1950 on the basis of the quality of glass (Silas Hurry, pers. comm.). This gravel is overlain by 40 cm of thickened A horizon and appears to have been inset into the sloping terrace edge by a recent flood (see Plate 1). Other gravels underlie the primary sandy unit and thus predate the sand and its pedogenesis.

PROCEDURE

To obtain the most usable information most efficiently, existing archeological pits were described and soil profile descriptions logged from shovel test pits (s.t.p.'s) on a 5m grid were adapted for use in stratigraphic cross sections. One line of auger holes was drilled along the W100 transect. In order to use the auger hole and s.t.p. data, 4 transects were levelled, two N-S (W100 and W115) and two E-W (N101 and N121). Locations of auger holes, s.t.p.'s, and soil pits used in this analysis are shown on Figure 2. Although s.t.p.'s are shallow and thus do not yield data on underlying stratigraphy, they are important for determining the lateral extent of soil units.

Soils were described in the field for color, texture, and consistency. Given the scope of the project, no size analyses or other laboratory tests were performed.

Textural descriptions recorded by Cavanaugh were adjusted to reflect the higher sand fractions observed in nearby holes; these adjusted textures are used in Plates 1-4.

PEDOGENIC DEVELOPMENT

The soil at the site is mapped as Bibb Silt-loam in the Prince Georges County Soil Survey (Figure 3; Kirby et al, 1967). The description of this unit includes mention that, "In a few areas the surface layer contains medium sized sand and feels gritty" (Kirby et al, 1967, p. 19). The Kettering site is such an area. The soils here are loamy sands and sandy loams. In most pits a cambic B and argillic B are developed. Parent material usually changes at the base of the B horizon.

Colors are quite red in the argillic B horizons, although color can vary dramatically from pit to pit. For example, pit N115 W105 is only a few meters from pit N118 W110, yet it is strikingly redder. Occasional thin clay skins are visible in the argillic B. Structure is generally weak to moderate in A, cambic B and argillic B horizons. Sands and gravels that underly or overly the soil may be massive and structureless.

A representative profile N118 W110 is shown in Figure 4. Recall that there is substantial variation from hole to hole, especially below about 80 cm depth.

Mottles are common below 80 cm depth, indicating that this site is poorly drained. Iron oxide cemented concretions (usually 80-100 cm) reflect the abundance of iron available from the weathering of the glauconite derived from the greensands of the uplands deposited at the site.

AGE AND STABILITY OF SOIL

Aside from the recently inset gravel (N80 W100), and the possibly recent deposition of sand over a now buried B horizon at N130 W75, the site appears to have been stable long enough that an argillic B horizon could develop. How long is that? To answer this question, we can refer to studies by other workers who have used independent means (such as C-14 isotopes) to date soils of varying stages of development. We must bear in mind, however, the rates of soil formation are influenced by climate, microclimate, drainage, parent material size and minerology, vegetation, and erosional or depositional modifications after onset of pedogenesis.

Many studies of soil formation rates are reviewed by Hall et al (in press). Table 1, taken from their report, indicates that translocation of clay can occur in as little as 100 years or less (Hallberg et al, 1978). More comparable are the data of Bilzi and Ciolkosz (1977), indicating that illuvial clay is found after 2000 years of development on alluvium in the Pennsylvania Appalacians. Taken as a whole, these studies suggest that about 2000 years minimum are needed to develop an argillic B horizon.

At the Kettering site, the parent material is extremely sandy. This would serve to acclerate pedogenesis because the surface area to be weathered is less than in a finer grained parent material. However, the site's low topographic position and consequent poor

drainage would serve to slow pedogenesis by preventing optimal aeration.

The combination of red color and argillic B development suggest an age of 10,000 years B.P. $\pm$ 4,000 (Jacobson, pers. comm., 1983) for the main body of the site.

EROSION OF THE SITE

Pronounced thinning and thickening of the A horizon is apparent in Plate 1. Several factors may have contributed to this phenomenon: erosion of the surface by sheet wash, trapping of sediment by tree roots, disturbance by plowing, and disturbance by heavy equipment.

Plow scars indicate that the site was once farmed, but it is now forested, primarily by Beech trees 25-30 cm in diameter.

A cut stump of unknown species (not Beech) and about 30 cm in diameter is located near the highway. Its 120 annual rings suggest that the present stand is well over a century in age. Some trees in the North-central and eastern part of the site are on mounds about 20 cm above the surrounding ground surface (see Plate 2). Roots are fully or partially exposed on the mounds. It is unclear whether these mounds indicate lowering of the surrounding surface by erosion or raising of the mound by 1) accumulation of soil at the base of the tree or by 2) growth of tree roots and heaving the soil. Mounds are found not only under Beeches, but under other trees as well. If the Beech mound located at N131 W100 (Plate 1) is representative, the thickening is restricted to the A horizon, suggesting either erosion of the surrounding surface or trapping soil at the tree base, <u>not</u> heaving.

Only 12 km east of the District of Columbia, the site is in an area that has undergone rapid urbanization over the past 25 years.

Early 1960s aerial photography of the site (for SCS) shows the site and the adjacent floodplains of the Western and Northeastern Branches of the Patuxent were heavily forested. When the Kettering development was constructed, much of the floodplain was cleared of trees. On the alluvial terrace at the site, trees were thinned and the underbrush cleared out (Richard Naegele, surveyor, pers. comm., 11 May 1983). A park now exists on the site. The heavy equipment used in creation of the park and removal of trees probably disturbed upper soil horizons.

EROSION OF SITE EDGE

The edge of the stable surface at the site is determined primarily by 1) road construction (on the north edge) and 2) fluvial erosion by the Northeast Branch (SE edge) and by the Western Branch (W edge). Paleocourses of the two streams are shown in Figure 1. They are taken from the Lanham 7.5' Quadrangle, photorevised in 1979(?). It is clear that these channels formerly abutted the edges of the site. The old mill over the Western Branch and its mill pond (Figure 1) do not appear on aerial photography from the early 1960s (photo base for Kirby et al, 1967) and are reported to have been put there as part of the landscaping for the Kettering development (Richard Naegele, surveyor, pers. comm.). Thus, it appears that the present channels are artificial and that prior to development, the streams flowed along the edge of the site, where they could be expected to erode and deposit during high flows.

Pits, auger holes, and s.t.p. descriptions were examined for holes at the edges of the site. By correlating the described and dated gravel in hole N80 W100 with gravel and sand in s.t.p. descriptions, the extent of inset fluvial gravel and sand is reconstucted in Figure 2, depicted by the solid line. The correlation is uncertain since the gravels and sands in the s.t.p.'s and described by Cavanaugh (unpubl. data) were not observed by the author. If this correlation is correct, the landward edge of the inset gravel represents the edge of erosion

of the site. If the gravels described in s.t.p.'s are not modern and thus not correlative, then the edge of erosion of the site is farther south, depicted by the dashed line in Figure 2.

SUMMARY AND CONCLUSIONS

The Kettering site, located on a low alluvial terrace, is underlain primarily by fine-medium well sorted fluvial sands, derived from greensand outcrops of the uplands. Occasional gravels underlie and predate the principal sandy unit, and modern gravels are inset along the Southeast margin of the site, suggesting erosion of the bank and emplacement of a point bar by high flows on the Northeast Branch. A fresh fragment of glass (probably ca. 1950s or later) found in the gravel indicates that the event was recent.

Most pits show development of an argillic B horizon, with occasional thin clay skins and weak-moderate structure. The redness of these soils and the presence of an argillic horizon suggests a minimum age of 2000 years B.P., more probably 10,000 years B.P. $\pm$ 4000 years.

As mentioned above the Southeast edge of the site has been eroded by the Northeast Branch. The A horizon of the site has been disturbed by plowing, heavy equipment, and possible sheetwash erosion or colluvial movement.

REFERENCES CITED

Cooke, C.W. and Cloos, E., 1951, Geologic map of Prince Georges County and the District of Columbia, Maryland Dept. Geology, Mines, and Water Resources.

Hall, G.F., Daniels, R.B., and Foss, J.E., (in press), Soil formation and renewal rates in the U.S., preprint.

Kirby, R.M., Matthews, E.D., and Baily, M.A., 1967, Soil Survey of Prince Georges County, Maryland, SCS.

Location	Criteria	Age	Source
Iowa	Illuvial clay	100 yrs	Hallberg, Wollenhaupt and Miller, 1978
Pennsylvania	Clay films	450 yrs	Cunningham et al., 1971
Iowa	Illuvial clay	1100 to 1800 yrs	Daniels and Jordon, 1966
Iowa	Clay films-argillic	<2000 yrs	Dietz and Ruhe, 1965
Pennsylvania	Illuvial clay	2000 yrs	Bilzi and Ciolkosz, 1977b
Iowa	Clay films	2500 yrs	Parsons, Scholtes and Riecken, 1962
Oregon	Clay firms - argillic	2350 yrs to 5250 yrs	Parsons and Herriman, 1976 Balster and Parsons, 1968
New Mexico	Argillic	>5000 yrs	Gile and Grossman, 1968; Gile and Hawley, 1968

Table 2. Rates of clay migration and accumulation and rates of argillic horizon formation.

Reproduced from Hall et al. (in press)

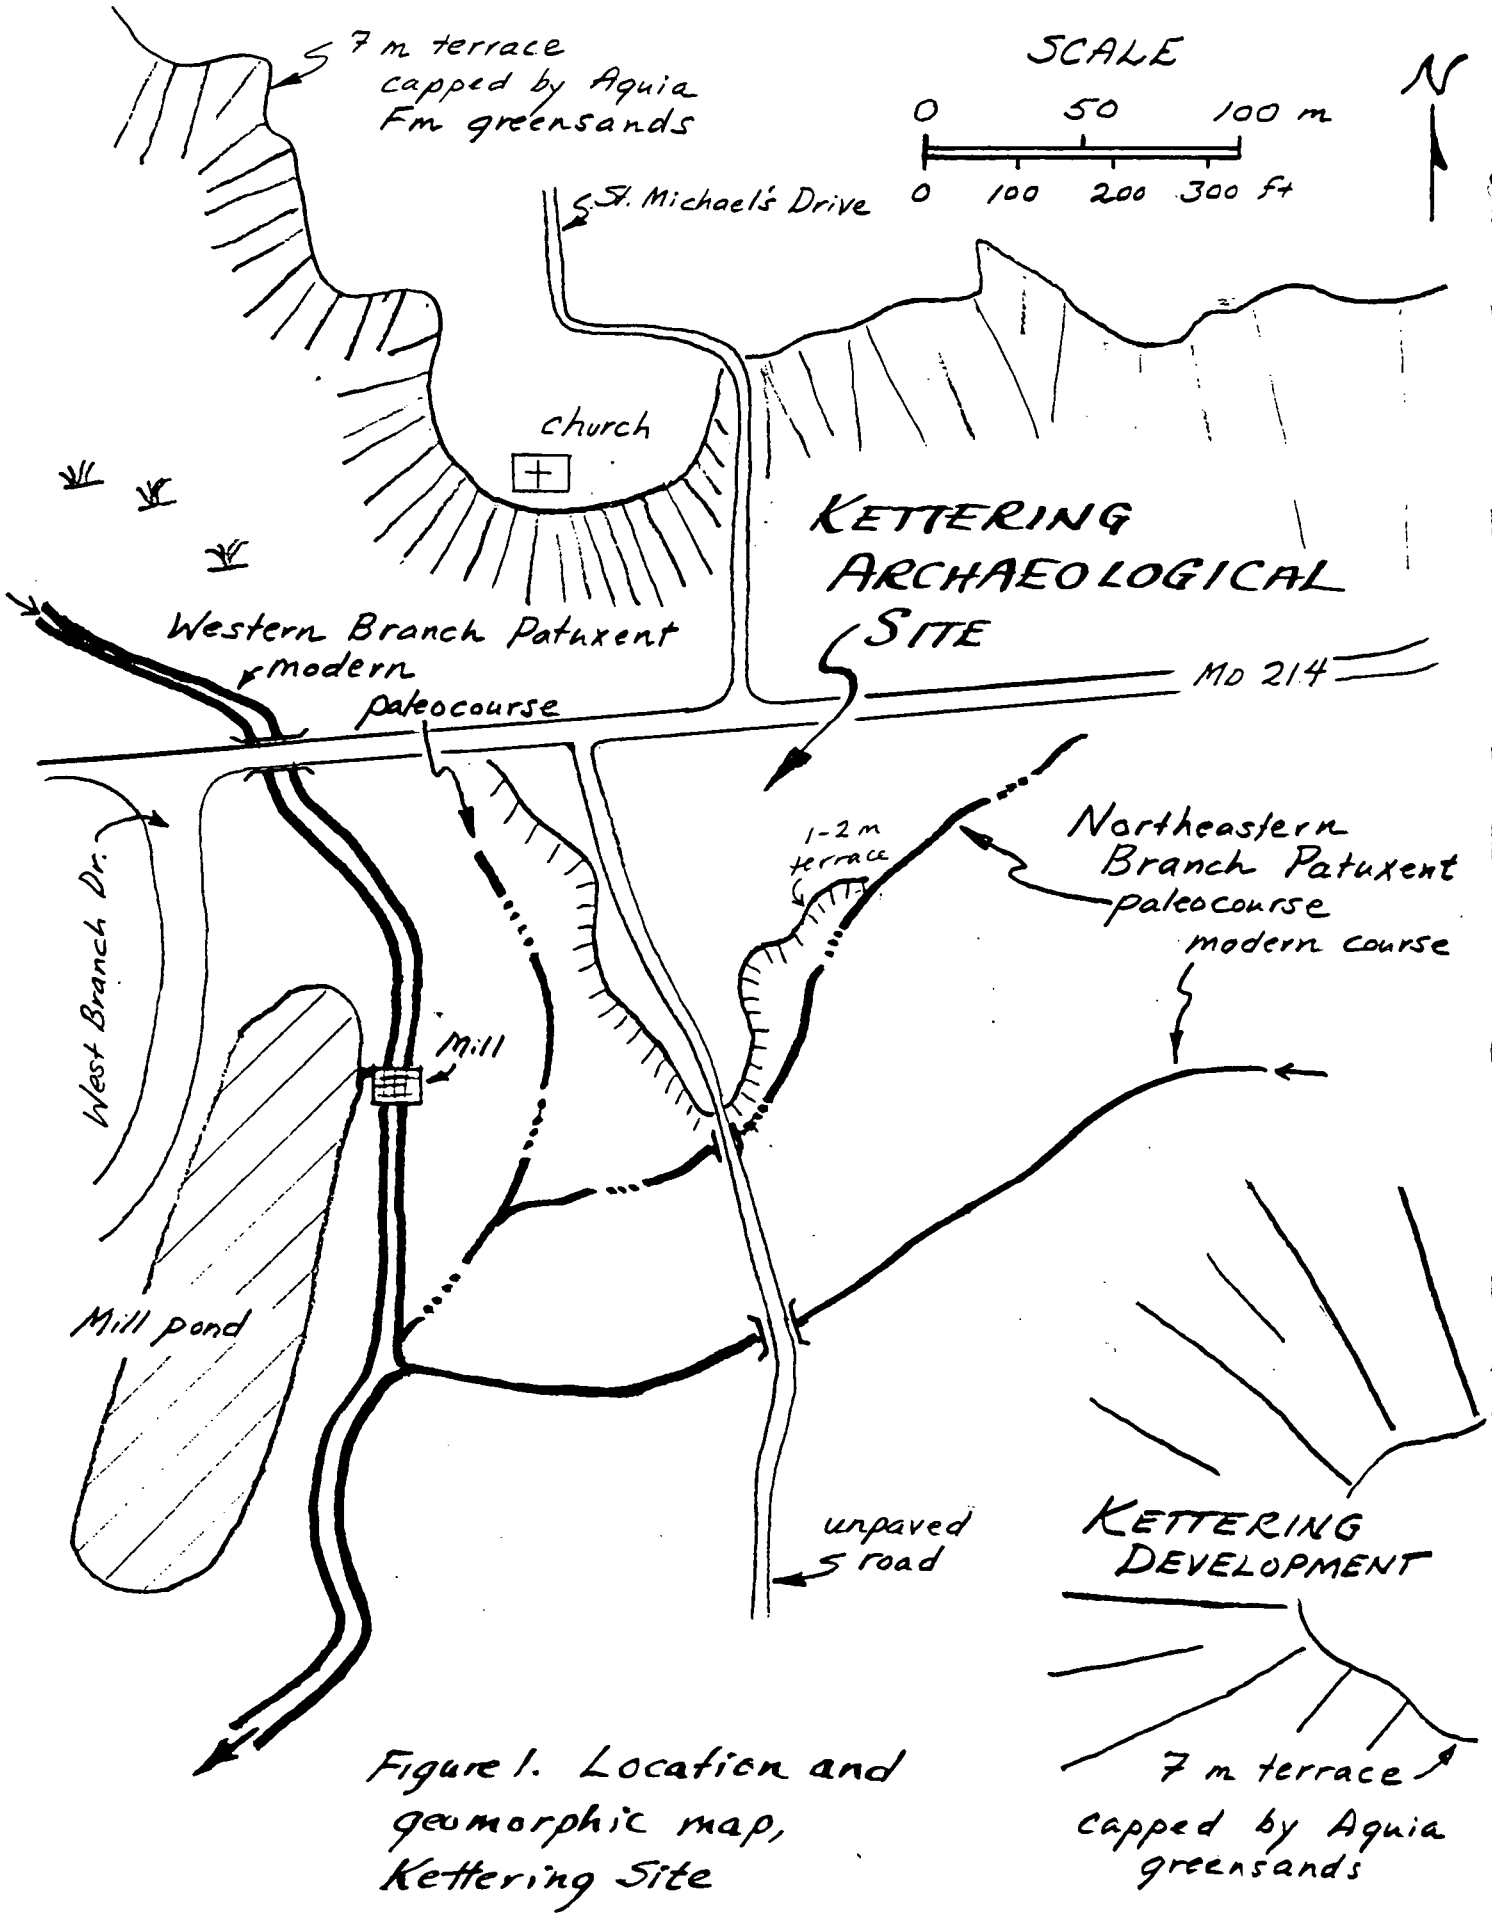

Figure 1. Location and geomorphic map, Kettering Site

KETTERING SITE
Pit N118 W110
described 5-11-83

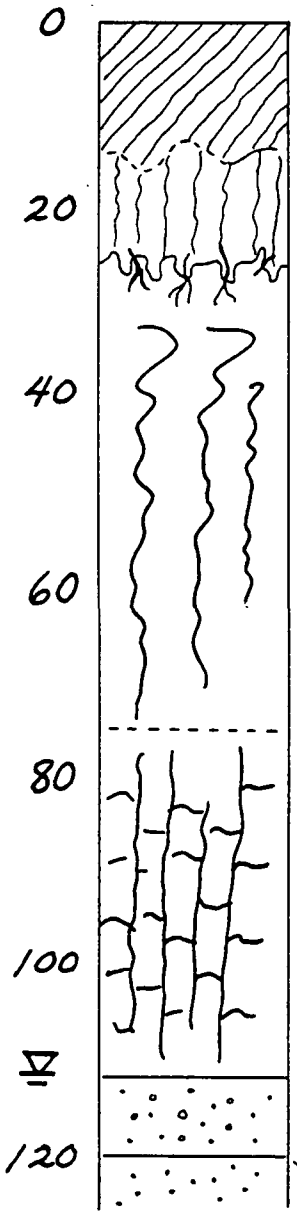

A1 dark brown fine sandy loam
weak-moderate subangular blocky

A2 dark brown fine loaming sand, moderate platy-subang. blocky, very friable, non sticky, non-plastic - slighty plastic, with mottles of greenish grey and dark red. roots at base.

B_c light red-yellow fine Loamy sand, massive, very friable, non sticky, non plastic

B_t orange brown fine sandy loam with increasing clay percent to base. occaisional thin clay skins. weak-moderate, coarse, friable, non sticky, nonplastic - sl. plastic

II B_c yellow-brown gravelly sand ~ saturated
non plastic, non sticky

III B_c r-br loamy sand
non plastic, non sticky

Figure 4. Soil profile at pit N118 W110, Kettering Site

GMK 5/13/83

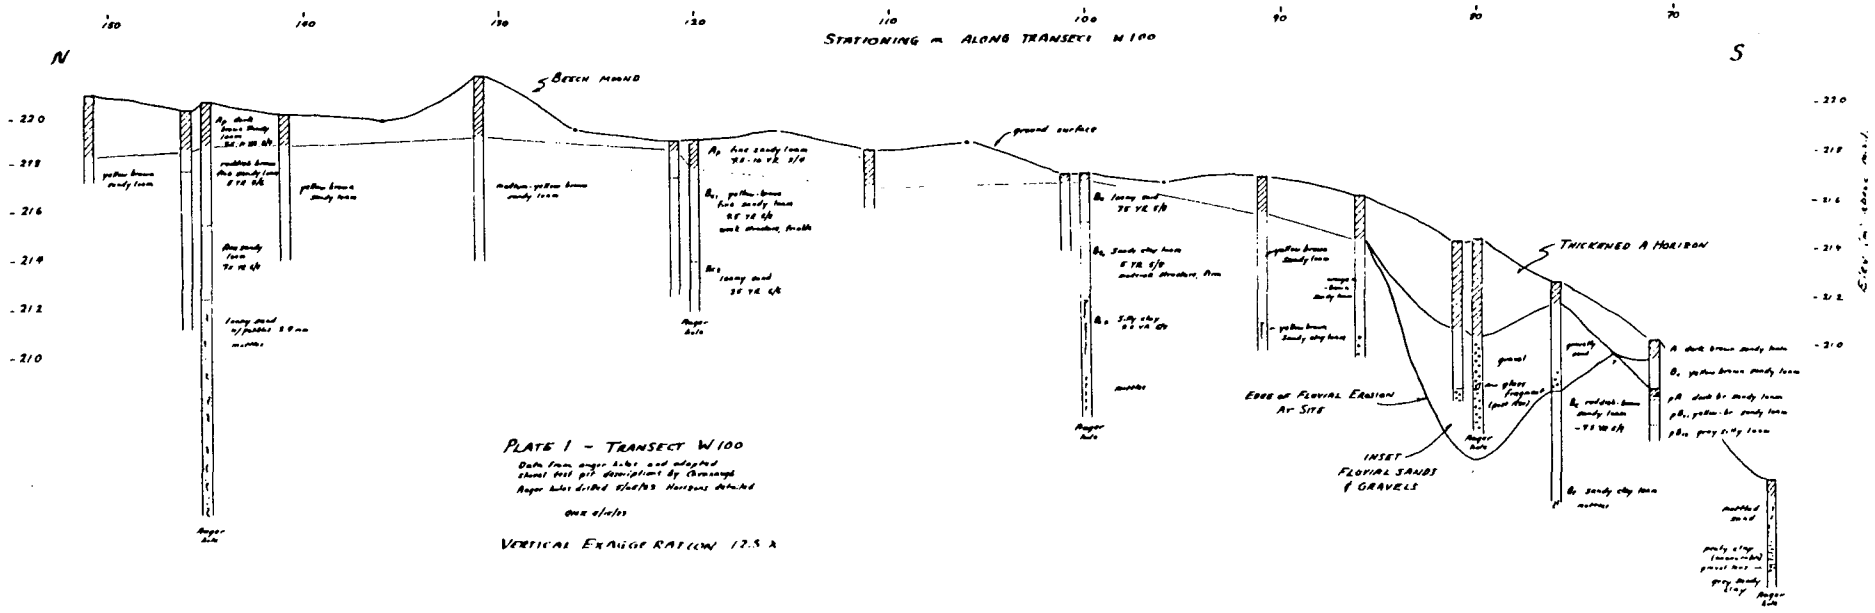

PLATE 1 - TRANSECT W100

Data from auger holes and adapted shovel test pit descriptions by Cavanaugh

Auger holes drilled 5/08/93 Horizons detailed

VERTICAL EXAGGERATION 12.5 X

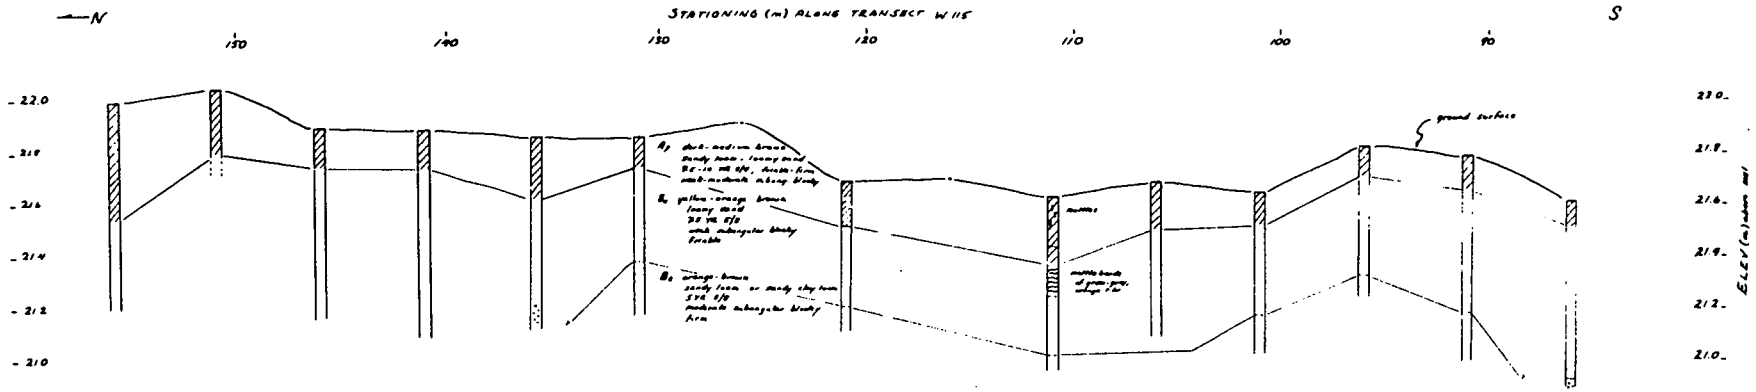

PLATE 2. W115 TRANSECT, KETTERING SITE
data adapted from Cavanaugh's shovel test pit descriptions (unpub) Harrison generalized

VERTICAL EXAGGERATION 12.5 x

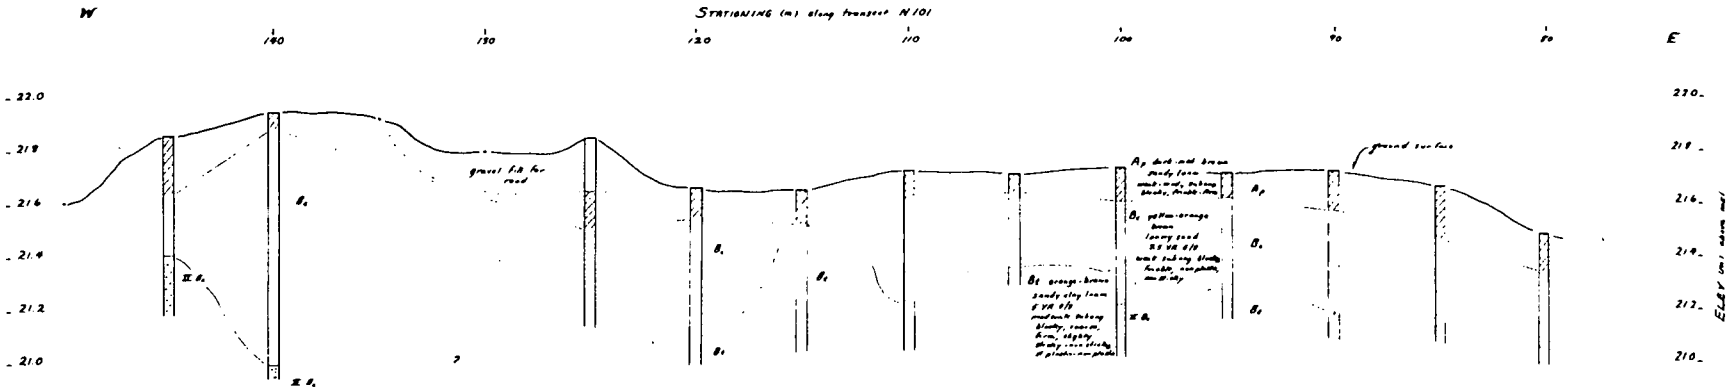

PLATE 3 N101 TRANSECT, KETTERING SITE

data adapted from Cavanough's descriptions of shovel test pits. Horizons generalized

GMK 8-15-83

VERTICAL EXAGGERATION 12.5X

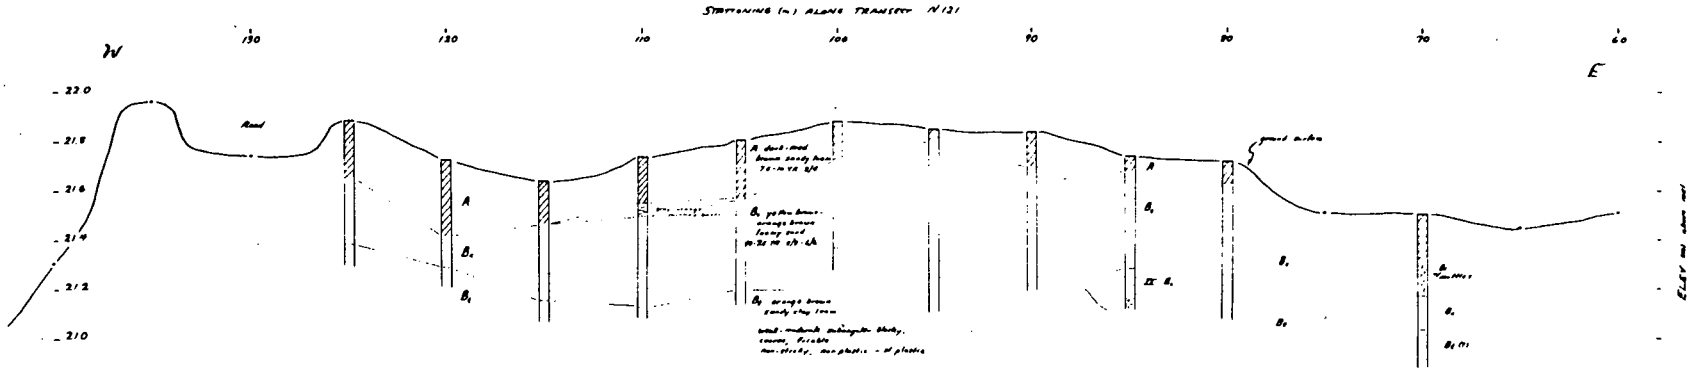

PLATE 4 TRANSECT N121 KETTERING SITE

Data adapted from Cavanaugh's descriptions of shovel test pit data. Horizons generalized

GMK 6-15-93

VERTICAL EXAGGERATION 12.6 x

Appendix C
Artifact Inventory Codes

APPENDIX C

ARTIFACT INVENTORY CODES

Inventory Format

The artifact inventories which follow are presented in column form. The first inventory lists the provenience and a description of each artifact recovered in the three phases of investigation. The following inventories list detailed measurements and descriptions of the ceramics, bifaces, ground/use-modified artifacts, cores and unifaces respectively.

Database Codes

Most of the inventory entries consist of words which are self-explanatory. Other entries were too lengthy to fit into the fields of the inventory format, and have been abbreviated. Explanations of the abbreviations follow.

Abbreviated Headings:

LV	Level
LYR	Layer
#	Number of specimens
SUBTYPE	Surface treatment (ceramics) / Raw material type (lithics)
WT(g)	Weight in grams
AUX1	Specimen segment
AUX2	Decoration (ceramics) / Heat treatment (lithics)
DISC(Y/N)	Discarded (yes/no)

Abbreviated Entries:

UNIT	
PPLOT	Piece-plotted
STP	Shovel Test Pit
UNPROV	Unprovenienced

GROUP	
CER	Ceramic
FAUN	Fauna
FLOR	Flora
HIST	Historic
LITH	Lithic
SAMP	Sample

CLASS	
PEK/GRND	Pecked/Ground
USE-MODI	Use-modified

SUBTYPE	
CRYS QUARTZ	Crystal Quartz
FERRUG SANDS	Ferruginous sandstone
SMOOTH	Smoothed/Plain
SURF	Surface treatment
UNCLAS	Unclassified
UNDETR	Undetermined

COLOR	
/T	Translucent
BAN	Banded
BRN	Brown
CRM	Cream
DRK	Dark
GRN	Green
GRY	Grey
LT	Light
MED	Medium
MOT	Mottled
VARIEG	Variegated
WHT	White
YEL	Yellow

AUX2	
ALTER	Altered
DECOR	Decorated
DAMMG	Damaged
PSEUD	Pseudo
UNDECOR	Undecorated
UNDET	Undetermined

Appendix D
Artifact Inventory
Phase I, II and III

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE I

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNPROV	0.00	0.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				1.000		
UNPROV	0.00	0.00	0	2 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				1.000		
UNPROV	0.00	0.00	0	1 HIST	OTHER	UNDETERMINED						1.000		N
UNPROV	0.00	0.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1.000		
UNPROV	0.00	0.00	0	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				1.000		
UNPROV	0.00	0.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK GRY	CHERT				1.000		
UNPROV	0.00	0.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	1.001		
UNPROV	0.00	0.00	0	1 LITH	BIFACE	STAGE 1 BIFACE		QUARTZ		WHOLE		1.002		
UNPROV	0.00	0.00	0	1 LITH	BIFACE	SIDE-NOTCHED POINT		QUARTZ		BASE		1.003		
UNPROV	0.00	0.00	0	1 LITH	BIFACE	TRIANGULAR POINT		QUARTZ		BASE		1.004		
UNPROV	0.00	0.00	0	1 LITH	BIFACE	TRIANGULAR POINT		QUARTZ		BASE		1.005		
UNPROV	0.00	0.00	0	1 LITH	BIFACE	STAGE 2 BIFACE		QUARTZ		BASE		1.006		
UNPROV	0.00	0.00	0	1 LITH	BIFACE	UNCLASSIFIABLE POINT	BLACK	CHERT		TIP		1.007		
UNPROV	0.00	0.00	0	1 LITH	UNIFACE	RETOUCHED PRIMARY FLAKE	DRK YEL	CHERT		FRAG		1.008		
STP	0.00	0.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				2.000		
STP	0.00	0.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				2.000		
STP	0.00	0.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				2.000		
STP	0.00	0.00	0	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				2.000		
STP	0.00	0.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				2.000		
STP	0.00	0.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	8			2.000		Y
STP	0.00	0.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				2.000		
STP	0.00	0.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				2.000		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		RIM	UNDECOR	2.001		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		RIM	UNDECOR	2.002		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	2.003		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	2.004		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	2.005		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	2.006		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	2.007		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	2.008		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	2.009		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	2.010		
STP	0.00	0.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		UNKNOWN	UNDECOR	2.011		
STP	0.00	0.00	0	1 CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	2.012		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE I

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	0.00	0.00	0		1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	2.013		
STP	0.00	0.00	0		1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		RIM	UNDECOR	2.014		
STP	0.00	0.00	0		1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	2.015		
STP	0.00	0.00	0		1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	2.016		
STP	0.00	0.00	0		1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	2.017		
STP	0.00	0.00	0		1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		RHYOLITE		LATERAL		2.018		
STP	0.00	0.00	0		1	LITH	UNIFACE	END SCRAPER		QUARTZ		WHOLE		2.019		
STP	0.00	0.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				3.000		
STP	0.00	0.00	0		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				3.000		
STP	0.00	0.00	0		2	LITH	DEBITAGE	CHUNK		QUARTZ				3.000		
STP	0.00	0.00	0		2	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	64			3.000		Y
STP	0.00	0.00	0		1	LITH	USE-MODI	CORE/HAMMERSTONE		QUARTZ		WHOLE		3.001		
STP	0.00	0.00	0		4	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	122			4.000		Y
STP	0.00	0.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				4.000		
STP	0.00	0.00	0		3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				4.000		
STP	0.00	0.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE				4.001		
STP	0.00	0.00	0		2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				5.000		
STP	0.00	0.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	2			5.000		Y
STP	0.00	0.00	0	0	1	LITH	DEBITAGE	UNCLASSIFIABLE CORE	MOT GRY	CHERT				5.001		
STP	0.00	0.00	0	0	1	CER	VESSEL	COARSE OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	5.002		
STP	0.00	0.00	0	0	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	5.003		
STP	0.00	0.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				6.000		
STP	0.00	0.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	34			6.000		Y
STP	0.00	0.00	0		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	6.001		
STP	0.00	0.00	0		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	6.002		
STP	0.00	0.00	0		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	6.003		
STP	0.00	0.00	0		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	6.004		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH	0.00 / WEST	0.00													
UNPROV	0.00	0.00	0		1	LITH	BIFACE	TRIANGULAR POINT		QUARTZITE		WHOLE		7.001	Grab sample # A	
UNPROV	0.00	0.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				353.000		
UNPROV	0.00	0.00	0		2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				353.000		
UNPROV	0.00	0.00	0		1	HIST	CERAMIC	19TH CENTURY						353.000		N
UNPROV	0.00	0.00	0		1	HIST	OTHER	UNDETERMINED						353.000		N
UNPROV	0.00	0.00	0		1	FAUN	BONE	UNDETERMINED				WHOLE	UNBURNED	353.000		
UNPROV	0.00	0.00	0		2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				353.000		
UNPROV	0.00	0.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				353.000		
UNPROV	0.00	0.00	0		1	CER	VESSEL	COARSE OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	353.001		
UNPROV	0.00	0.00	0		1	LITH	UNIFACE	RETOUCHED PRIMARY FLAKE		QUARTZ		WHOLE		353.001		
UNPROV	0.00	0.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	MOT GRY	CHERT			HEAT DAMMG	354.000		
UNPROV	0.00	0.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	354.001		
UNPROV	0.00	0.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	354.002		
UNPROV	0.00	0.00	0		1	LITH	BIFACE	UNCLASSIFIABLE BIFACE	MOT GRY	CHERT		TIP		354.003		
UNPROV	0.00	0.00	0		1	LITH	BIFACE	STAGE 1 BIFACE		QUARTZ		WHOLE		354.004		
**	NORTH	81.00 / WEST	100.00													
STP	81.00	100.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				118.000		
STP	81.00	100.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	3			118.000		Y
**	NORTH	81.00 / WEST	105.00													
STP	81.00	105.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				103.000		
STP	81.00	105.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				103.000		
STP	81.00	105.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE	DRK YEL	CHERT				103.000		
**	NORTH	81.00 / WEST	110.00													
STP	81.00	110.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				88.000		
STP	81.00	110.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				88.000		
**	NORTH	81.00 / WEST	115.00													
STP	81.00	115.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	8			72.000		Y
STP	81.00	115.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	72.000		
STP	81.00	115.00	0		1	CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	72.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH	81.00 / WEST 120.00												
STP	81.00	120.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				56.000		
STP	81.00	120.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	MED GRY	CHERT			HEAT DAMMG	56.000		
STP	81.00	120.00	0	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	78			56.000		Y
**	NORTH	81.00 / WEST 125.00												
STP	81.00	125.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE				41.000		
STP	81.00	125.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				41.000		
STP	81.00	125.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				41.000		
STP	81.00	125.00	0	3 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				41.000		
STP	81.00	125.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				41.000		
STP	81.00	125.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				41.000		
STP	81.00	125.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				41.000		
STP	81.00	125.00	0	5 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	70			41.000		Y
STP	81.00	125.00	0	1 CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BASE	UNDECOR	41.001		
STP	81.00	125.00	0	1 CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	41.002		
**	NORTH	86.00 / WEST 90.00												
STP	86.00	90.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				144.000		
STP	86.00	90.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				144.000		
STP	86.00	90.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				144.000		
STP	86.00	90.00	0	1 LITH	UNIFACE	RETOUCHED CHUNK	BLACK/T	CHERT		WHOLE		144.001		
STP	86.00	90.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	144.002		
**	NORTH	86.00 / WEST 95.00												
STP	86.00	95.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	88			131.000		Y
STP	86.00	95.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	MOT BRN	CHERT				131.000		
STP	86.00	95.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				131.000		
STP	86.00	95.00	0	1 CER	VESSEL	SAND & SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	131.001		
STP	86.00	95.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	131.002		
STP	86.00	95.00	0	1 LITH	UNIFACE	RETOUCHED SECONDARY FLAKE		QUARTZ		WHOLE		131.003		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH	86.00 / WEST 100.00														
STP	86.00	100.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				117.000		
STP	86.00	100.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				117.000		
STP	86.00	100.00	0		1	CER	VESSEL	STEATITE-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	117.001		
STP	86.00	100.00	0		1	CER	VESSEL	SAND-TEMPERED		NET-SURF		RIM	UNDECOR	117.002		
STP	86.00	100.00	0		1	LITH	OHTER	FIRE-CRACKED ROCK		SANDSTONE				117.003		
**	NORTH	86.00 / WEST 105.00														
STP	86.00	105.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				102.000		
STP	86.00	105.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	14			102.000		Y
STP	86.00	105.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				102.000		
STP	86.00	105.00	0		1	LITH	UNIFACE	RETOUCHED SECONDARY FLAKE	BLACK	CHERT		FRAG		102.001		
STP	86.00	105.00	0		1	CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	102.002		
STP	86.00	105.00	0		1	LITH	BIFACE	TRIANGULAR POINT		QUARTZITE		BASE		102.003		
**	NORTH	86.00 / WEST 110.00														
STP	86.00	110.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				87.000		
STP	86.00	110.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				87.000		
STP	86.00	110.00	0		1	LITH	OTHER	UNMODIFIED		IGNEOUS				87.000		Y
STP	86.00	110.00	0		3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				87.000		
STP	86.00	110.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				87.000		
STP	86.00	110.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				87.000		
STP	86.00	110.00	0		3	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	33			87.000		Y
STP	86.00	110.00	0		1	CER	VESSEL	SAND & SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	87.001		
STP	86.00	110.00	0		1	LITH	BIFACE	SIDE-NOTCHED POINT		QUARTZITE		WHOLE		87.002		
**	NORTH	86.00 / WEST 115.00														
STP	86.00	115.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE	MED BRN	CHERT				71.000		
STP	86.00	115.00	0		3	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	71.000		
STP	86.00	115.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				71.000		
STP	86.00	115.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				71.000		
STP	86.00	115.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				71.000		
STP	86.00	115.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				71.000		
STP	86.00	115.00	0		1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	86.00	115.00	0	1 LITH	UNIFACE	RETOUCHED CHUNK		QUARTZITE		WHOLE		71.001		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.002		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.003		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.004		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.005		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.006		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.007		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.008		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.009		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.010		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.011		
STP	86.00	115.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	71.012		
STP	86.00	115.00	0	1 LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				71.013		
UNIT	86.00	115.00	1 A	1 HIST	OTHER	MODERN						269.000	N 1/2	Y
UNIT	86.00	115.00	1 A	1 LITH	DEBITAGE	SECONDARY FLAKE	MED GRY	CHERT				270.000	N 1/2	
UNIT	86.00	115.00	1 A	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				270.000	N 1/2	
UNIT	86.00	115.00	1 A	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				270.000	N 1/2	
UNIT	86.00	115.00	1 A	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				270.000	N 1/2	
UNIT	86.00	115.00	1 A	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				270.000	N 1/2	
UNIT	86.00	115.00	1 A	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	270.000	N 1/2	
UNIT	86.00	115.00	1 A	1 LITH	DEBITAGE	CHUNK		QUARTZITE				270.000	N 1/2	
UNIT	86.00	115.00	1 A	1 HIST	OTHER	MODERN						270.000	N 1/2	Y
UNIT	86.00	115.00	1 A	2 LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				270.000	N 1/2	
UNIT	86.00	115.00	1 A	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				270.001	N 1/2	
UNIT	86.00	115.00	1 A	1 LITH	BIFACE	STAGE 1 BIFACE		QUARTZITE		BASE		270.002	N 1/2	
PPLOT	86.00	115.00	1 A	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	271.001	N 1/2, Artifact # 1	
UNIT	86.00	115.00	2 C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				272.000	N 1/2	
UNIT	86.00	115.00	2 C	7 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	80			272.000	N 1/2	Y
UNIT	86.00	115.00	2 C	2 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				272.000	N 1/2	
UNIT	86.00	115.00	2 C	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK RED	CHERT			HEAT ALTER	272.000	N 1/2	
UNIT	86.00	115.00	2 C	1 LITH	DEBITAGE	TERTIARY FLAKE	MOT GRY	CHERT				272.000	N 1/2	
UNIT	86.00	115.00	2 C	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				272.000	N 1/2	
UNIT	86.00	115.00	2 C	1 CER	VESSEL	(SHERDLET)		CORD-SURF			UNDECOR	272.000	N 1/2	
UNIT	86.00	115.00	2 C	7 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				272.000	N 1/2	

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	86.00	115.00	2	C	15 LITH	DEBITAGE	CHUNK		QUARTZ				272.000	N 1/2	
UNIT	86.00	115.00	2	C	1 LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				272.000	N 1/2	
UNIT	86.00	115.00	2	C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	272.001	N 1/2	
UNIT	86.00	115.00	2	C	1 LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				272.002	N 1/2	
PPLOT	86.00	115.00	2	C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	273.001	N 1/2, Artifact # 1	
PPLOT	86.00	115.00	2	C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	274.001	N 1/2, Artifact # 2	
PPLOT	86.00	115.00	2	C	1 LITH	BIFACE	STAGE 3 BIFACE		QUARTZITE		BASE		275.001	N 1/2, Artifact # 3	
PPLOT	86.00	115.00	2	C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	276.001	N 1/2, Artifact # 4	
PPLOT	86.00	115.00	2	C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	277.001	N 1/2, Artifact # 5	
PPLOT	86.00	115.00	2	C	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	278.001	N 1/2, Artifact # 6	
PPLOT	86.00	115.00	2	C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	279.001	N 1/2, Artifact # 7	
PPLOT	86.00	115.00	2	C	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	280.001	N 1/2, Artifact # 8	
UNIT	86.00	115.00	3	C	2 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				281.000	N 1/2	
UNIT	86.00	115.00	3	C	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				281.000	N 1/2	
UNIT	86.00	115.00	3	C	2 LITH	DEBITAGE	CHUNK		QUARTZ				281.000	N 1/2	
UNIT	86.00	115.00	3	C	2 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	14			281.000	N 1/2	Y
UNIT	86.00	115.00	3	C	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZITE				281.000	N 1/2	
UNIT	86.00	115.00	3	C	1 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				281.000	N 1/2	
UNIT	86.00	115.00	3	C	1 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				281.000	N 1/2	
UNIT	86.00	115.00	3	C	1 LITH	DEBITAGE	TERTIARY FLAKE	MOT GRY	CHERT				281.000	N 1/2	
UNIT	86.00	115.00	3	C	4 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				281.000	N 1/2	
UNIT	86.00	115.00	3	C	1 LITH	DEBITAGE	CHUNK		QUARTZITE				281.000	N 1/2	
UNIT	86.00	115.00	3	C	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				281.000	N 1/2	
UNIT	86.00	115.00	3	C	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				281.000	N 1/2	
**	NORTH	86.00 / WEST 116.00													
UNIT	86.00	116.00	1	C	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				217.000	NE 1/4	
UNIT	86.00	116.00	1	C	1 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				217.000	NE 1/4	
UNIT	86.00	116.00	1	C	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				217.000	NE 1/4	
UNIT	86.00	116.00	1	C	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	8			217.000	NE 1/4	Y
UNIT	86.00	116.00	1	C	1 HIST	OTHER	MODERN						217.000	NE 1/4	Y
UNIT	86.00	116.00	1	C	1 LITH	BIFACE	CONTRACTING-STEMMED DRILL		RHYOLITE		WHOLE		217.001	NE 1/4	
UNIT	86.00	116.00	2	C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				218.000	NE 1/4	
UNIT	86.00	116.00	2	C	1 LITH	DEBITAGE	SECONDARY FLAKE	MOT GRY	CHERT				218.000	NE 1/4	

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	86.00	116.00	2	C	2 LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				218.000	NE 1/4	
UNIT	86.00	116.00	2	C	1 LITH	DEBITAGE	CHUNK	DRK YEL	CHERT				218.000	NE 1/4	
UNIT	86.00	116.00	2	C	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	12			218.000	NE 1/4	Y
UNIT	86.00	116.00	2	C	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				218.000	NE 1/4	
UNIT	86.00	116.00	2	C	5 LITH	DEBITAGE	CHUNK		QUARTZ				218.000	NE 1/4	
UNIT	86.00	116.00	2	C	2 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				218.000	NE 1/4	
UNIT	86.00	116.00	2	C	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				218.000	NE 1/4	
UNIT	86.00	116.00	2	C	3 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				218.000	NE 1/4	
UNIT	86.00	116.00	2	C	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				218.000	NE 1/4	
UNIT	86.00	116.00	2	C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				218.001	NE 1/4	
PPLOT	86.00	116.00	2	C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	219.001	NE 1/4, Artifact # 1	
PPLOT	86.00	116.00	2	C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	220.001	NE 1/4, Artifact # 2	
PPLOT	86.00	116.00	2	C	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	221.000	NE 1/4, Artifact # 3	
PPLOT	86.00	116.00	2	C	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	221.001	NE 1/4, Artifact # 3	
PPLOT	86.00	116.00	2	C	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	150			222.000	NE 1/4, FCR	Y
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE	VARIEG	CHERT			HEAT DAMMG	223.000	NE 1/4	
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	3 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	4			223.000	NE 1/4	Y
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	PRIMARY FLAKE	MED RED	CHERT				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	DECORTICATION FLAKE	DRK YEL	CHERT				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	3 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	1 LITH	DEBITAGE	CHUNK		QUARTZ				223.000	NE 1/4	
UNIT	86.00	116.00	3	C	1 LITH	OTHER	UNMODIFIED		QUARTZITE	165			223.000	NE 1/4	Y
UNIT	86.00	116.00	4	C	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				224.000	NE 1/4	
UNIT	86.00	116.00	4	C	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				224.000	NE 1/4	
UNIT	86.00	116.00	4	C	2 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				224.000	NE 1/4	
UNIT	86.00	116.00	4	C	1 LITH	DEBITAGE	DECORTICATION FLAKE	DRK YEL	CHERT				224.000	NE 1/4	

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	86.00	116.00	4 C	3 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				224.000	NE 1/4	
UNIT	86.00	116.00	4 C	1 LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				224.000	NE 1/4	
UNIT	86.00	116.00	4 C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				224.000	NE 1/4	
UNIT	86.00	116.00	4 C	4 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				224.000	NE 1/4	
UNIT	86.00	116.00	4 C	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				224.000	NE 1/4	
**	NORTH	86.00 / WEST 120.00												
STP	86.00	120.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				55.000		
STP	86.00	120.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				55.000		
STP	86.00	120.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				55.000		
STP	86.00	120.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	17			55.000		Y
STP	86.00	120.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				55.000		
STP	86.00	120.00	0	1 CER	VESSEL	SHELL-TEMPERED		NET-SURF		BODY	UNDECOR	55.001		
**	NORTH	86.00 / WEST 125.00												
STP	86.00	125.00	0	2 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				40.000		
STP	86.00	125.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				40.000		
STP	86.00	125.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				40.000		
STP	86.00	125.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				40.000		
STP	86.00	125.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				40.000		
STP	86.00	125.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				40.000		
STP	86.00	125.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				40.000		
STP	86.00	125.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZITE				40.000		
STP	86.00	125.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	2			40.000		Y
STP	86.00	125.00	0	1 CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	40.001		
**	NORTH	87.00 / WEST 115.00												
UNIT	87.00	115.00	1 A	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				235.000		
UNIT	87.00	115.00	1 A	4 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	235.000		
UNIT	87.00	115.00	1 A	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				235.000		
UNIT	87.00	115.00	1 A	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				235.000		
UNIT	87.00	115.00	1 A	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	235.001		
UNIT	87.00	115.00	1 A	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	235.002		
UNIT	87.00	115.00	1 A	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	235.003		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	235.004		
UNIT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	235.005		
UNIT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	235.006		
PPLOT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	236.001	Sherds at 6 cm bd	
PPLOT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	236.002	Sherds at 6 cm bd	
PPLOT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	236.003	Sherds at 6 cm bd	
PPLOT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	236.004	Sherds at 6 cm bd	
PPLOT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	236.005	Sherds at 6 cm bd	
PPLOT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	236.006	Sherds at 6 cm bd	
PPLOT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	236.007	Sherds at 6 cm bd	
PPLOT	87.00	115.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	236.008	Sherds at 6 cm bd	
UNIT	87.00	115.00	2	C	3	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				237.000		
UNIT	87.00	115.00	2	C	9	LITH	DEBITAGE	CHUNK		QUARTZ				237.000		
UNIT	87.00	115.00	2	C	4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				237.000		
UNIT	87.00	115.00	2	C	1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				237.000		
UNIT	87.00	115.00	2	C	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				237.000		
UNIT	87.00	115.00	2	C	1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				237.000		
UNIT	87.00	115.00	2	C	3	LITH	DEBITAGE	CHUNK		QUARTZITE				237.000		
UNIT	87.00	115.00	2	C	2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				237.000		
UNIT	87.00	115.00	2	C	1	LITH	DEBITAGE	SECONDARY FLAKE	MOT GRY	CHERT				237.000		
UNIT	87.00	115.00	2	C	1	LITH	DEBITAGE	PRIMARY FLAKE	MOT GRY	CHERT				237.000		
UNIT	87.00	115.00	2	C	5	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	237.000		
UNIT	87.00	115.00	2	C	8	HIST	OTHER	MODERN						237.000		Y
UNIT	87.00	115.00	2	C	9	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	106			237.000		Y
UNIT	87.00	115.00	2	C	1	LITH	DEBITAGE	SECONDARY FLAKE	BLACK	CHERT				237.000		
UNIT	87.00	115.00	2	C	4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				237.000		
UNIT	87.00	115.00	2	C	9	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				237.000		
UNIT	87.00	115.00	2	C	5	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				237.000		
UNIT	87.00	115.00	2	C	2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				237.000		
UNIT	87.00	115.00	2	C	2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				237.000		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	237.001		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	237.002		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	237.003		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	237.004		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	237.005		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	237.006		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	237.007		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	237.008		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	INCISED	237.009		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	237.010		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	237.011		
UNIT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	237.012		
UNIT	87.00	115.00	2	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				237.013		
UNIT	87.00	115.00	2	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				237.014		
UNIT	87.00	115.00	2	C	1	LITH	UNIFACE	RETOUCHED DECORTICATN FLAKE	BLACK	CHERT		FRAG		237.015		
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	238.001	Sherd # 1	
PPLOT	87.00	115.00	2	C	1	LITH	BIFACE	SIDE-NOTCHED POINT		QUARTZ		WHOLE		239.001	Projectile point # 1	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	240.001	Sherds at 6-7 cm bd	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	240.002	Sherds at 6-7 cm bd	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	240.003	Sherds at 6-7 cm bd	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	241.001	Sherd # 2	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	242.001	Sherd # 3	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	243.001	Sherd # 4	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	244.001	Sherd # 5	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	245.001	Sherd # 6	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	246.001	Sherd # 7	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	247.001	Sherd # 8	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	248.001	Sherd # 9	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	249.001	Sherd # 10	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	250.001	Sherd # 11	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	251.001	Sherd # 12, 8-9cm bd	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	252.001	Sherd # 13	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	253.001	Sherd # 14	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	254.001	Sherd # 15	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	255.001	Sherd # 16	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	256.001	Sherd # 17	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	257.001	Sherd # 18	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	258.001	Sherd # 19	

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	259.001	Sherd # 20	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	260.001	Sherd # 21	
PPLOT	87.00	115.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		RIM	UNDECOR	261.001	Sherd # 22	
PPLOT	87.00	115.00	2	C	1	LITH	BIFACE	CORNER-NOTCHED POINT		QUARTZ		WHOLE		262.001	Projectile point # 2	
PPLOT	87.00	115.00	2	C	1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	84			263.000	FCR, 12 cm bd W wall	Y
UNIT	87.00	115.00	3	C	4	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				264.000		
UNIT	87.00	115.00	3	C	2	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				264.000		
UNIT	87.00	115.00	3	C	1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	13			264.000		Y
UNIT	87.00	115.00	3	C	15	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				264.000		
UNIT	87.00	115.00	3	C	2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				264.000		
UNIT	87.00	115.00	3	C	3	LITH	DEBITAGE	CHUNK		QUARTZ				264.000		
UNIT	87.00	115.00	3	C	1	LITH	DEBITAGE	CHUNK		QUARTZITE				264.000		
UNIT	87.00	115.00	3	C	1	LITH	DEBITAGE	SECONDARY FLAKE	DRK RED	CHERT				264.000		
UNIT	87.00	115.00	3	C	4	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				264.000		
UNIT	87.00	115.00	3	C	3	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				264.000		
UNIT	87.00	115.00	3	C	2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				264.000		
UNIT	87.00	115.00	3	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				264.000		
UNIT	87.00	115.00	3	C	5	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				264.000		
UNIT	87.00	115.00	3	C	1	LITH	DEBITAGE	CHUNK		RHYOLITE				264.000		
UNIT	87.00	115.00	3	C	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				264.000		
PPLOT	87.00	115.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	265.001	Sherd # 1	
PPLOT	87.00	115.00	3	C	2	LITH	DEBITAGE	CHUNK		QUARTZITE				266.000	FCR	
PPLOT	87.00	115.00	3	C	5	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	132			266.000	FCR	Y
UNIT	87.00	115.00	4	C	2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				267.000		
UNIT	87.00	115.00	4	C	1	LITH	DEBITAGE	CHUNK		RHYOLITE				267.000		
UNIT	87.00	115.00	4	C	4	LITH	DEBITAGE	CHUNK		QUARTZ				267.000		
UNIT	87.00	115.00	4	C	3	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				267.000		
UNIT	87.00	115.00	4	C	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				267.000		
UNIT	87.00	115.00	4	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				267.000		
UNIT	87.00	115.00	4	C	13	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				267.000		
UNIT	87.00	115.00	4	C	5	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				267.000		
UNIT	87.00	115.00	4	C	1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	16			267.000		Y
UNIT	87.00	115.00	4	C	1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				267.000		
UNIT	87.00	115.00	4	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				267.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	87.00	115.00	4 C	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		RHYOLITE				267.000		
UNIT	87.00	115.00	4 C	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	267.001		
UNIT	87.00	115.00	4 C	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		LATERAL		267.002		
UNIT	87.00	115.00	4 C	1 LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZ				267.003		
UNIT	87.00	115.00	5 C	3 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				268.000		
UNIT	87.00	115.00	5 C	1 LITH	DEBITAGE	CHUNK		RHYOLITE				268.000		
UNIT	87.00	115.00	5 C	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	2			268.000		Y
UNIT	87.00	115.00	5 C	1 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				268.000		
UNIT	87.00	115.00	5 C	1 LITH	DEBITAGE	CHUNK		QUARTZ				268.000		
UNIT	87.00	115.00	5 C	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				268.000		
UNIT	87.00	115.00	5 C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	268.001		
**	NORTH	87.00 / WEST 116.00												
UNIT	87.00	116.00	1 A	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				203.000	E 1/2	
UNIT	87.00	116.00	1 A	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				203.000	E 1/2	
UNIT	87.00	116.00	1 A	1 HIST	OTHER	20TH CENTURY						203.000	E 1/2	Y
UNIT	87.00	116.00	1 A	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BASE	UNDECOR	203.001	E 1/2	
UNIT	87.00	116.00	1 A	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	203.002	E 1/2	
UNIT	87.00	116.00	2 C	3 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				204.000	E 1/2	
UNIT	87.00	116.00	2 C	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				204.000	E 1/2	
UNIT	87.00	116.00	2 C	1 LITH	DEBITAGE	CHUNK	MED GRY	CHERT				204.000	E 1/2	
UNIT	87.00	116.00	2 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				204.000	E 1/2	
UNIT	87.00	116.00	2 C	1 LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				204.000	E 1/2	
UNIT	87.00	116.00	2 C	2 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				204.000	E 1/2	
UNIT	87.00	116.00	2 C	8 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				204.000	E 1/2	
UNIT	87.00	116.00	2 C	4 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				204.000	E 1/2	
UNIT	87.00	116.00	2 C	2 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				204.000	E 1/2	
UNIT	87.00	116.00	2 C	1 LITH	DEBITAGE	CHUNK		QUARTZITE				204.000	E 1/2	
UNIT	87.00	116.00	2 C	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				204.000	E 1/2	
UNIT	87.00	116.00	2 C	1 LITH	DEBITAGE	PRIMARY FLAKE	MOT YEL	CHERT				204.000	E 1/2	
UNIT	87.00	116.00	2 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				204.001	E 1/2	
PPLOT	87.00	116.00	2 C	1 LITH	BIFACE	TRIANGULAR POINT		QUARTZITE		FRAG		205.001	E 1/2, Artifact # 1	
PPLOT	87.00	116.00	2 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				206.001	E 1/2, Artifact # 2	
PPLOT	87.00	116.00	2 C	1 LITH	USE-MODI	EDGE/CENTER BATTRD HAMMERSTO		SANDSTONE		FRAG		207.001	E 1/2, Artifact # 3	

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	87.00	116.00	2	C	1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	INCISED	208.001	E 1/2, Artifact # 4	
PPLOT	87.00	116.00	2	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	209.001	E 1/2, Artifact # 5	
PPLOT	87.00	116.00	2	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	210.001	E 1/2, Artifact # 6	
PPLOT	87.00	116.00	2	C	1	LITH	BIFACE	EXPANDING-STEMMED POINT		QUARTZITE		WHOLE		211.001	E 1/2, Artifact # 7	
PPLOT	87.00	116.00	2	C	3	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	126			212.000	E 1/2, FCR	Y
UNIT	87.00	116.00	3	C	5	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				213.000	E 1/2	
UNIT	87.00	116.00	3	C	1	LITH	DEBITAGE	CHUNK	DRK GRY	CHERT				213.000	E 1/2	
UNIT	87.00	116.00	3	C	1	LITH	DEBITAGE	PRIMARY FLAKE	DRK RED	CHERT				213.000	E 1/2	
UNIT	87.00	116.00	3	C	1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	1			213.000	E 1/2	Y
UNIT	87.00	116.00	3	C	14	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				213.000	E 1/2	
UNIT	87.00	116.00	3	C	2	LITH	DEBITAGE	CHUNK		QUARTZ				213.000	E 1/2	
UNIT	87.00	116.00	3	C	3	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				213.000	E 1/2	
UNIT	87.00	116.00	3	C	1	LITH	DEBITAGE	CHUNK		RHYOLITE				213.000	E 1/2	
UNIT	87.00	116.00	3	C	1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				213.000	E 1/2	
UNIT	87.00	116.00	3	C	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				213.000	E 1/2	
UNIT	87.00	116.00	3	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				213.000	E 1/2	
UNIT	87.00	116.00	3	C	4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				213.000	E 1/2	
UNIT	87.00	116.00	3	C	1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	213.000	E 1/2	
UNIT	87.00	116.00	3	C	1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				213.000	E 1/2	
UNIT	87.00	116.00	3	C	1	LITH	DEBITAGE	DECORTICATION FLAKE	VARIEG	CHERT				213.000	E 1/2	
UNIT	87.00	116.00	3	C	2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				213.000	E 1/2	
UNIT	87.00	116.00	3	C	2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				213.000	E 1/2	
UNIT	87.00	116.00	3	C	3	LITH	DEBITAGE	CHUNK		QUARTZITE				213.000	E 1/2	
UNIT	87.00	116.00	3	C	1	LITH	BIFACE	UNCLASSIFIABLE POINT		QUARTZITE		TIP		213.001	E 1/2	
UNIT	87.00	116.00	3	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZITE				213.002	E 1/2	
UNIT	87.00	116.00	3	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	213.003	E 1/2	
PPLOT	87.00	116.00	3	C	1	LITH	BIFACE	EXPANDING-STEMMED POINT		QUARTZITE		FRAG		214.001	E 1/2, Artifact # 1	
UNIT	87.00	116.00	4	C	3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				215.000	E 1/2	
UNIT	87.00	116.00	4	C	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				215.000	E 1/2	
UNIT	87.00	116.00	4	C	1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				215.000	E 1/2	
UNIT	87.00	116.00	4	C	1	LITH	DEBITAGE	SECONDARY FLAKE	DRK RED	CHERT				215.000	E 1/2	
UNIT	87.00	116.00	4	C	1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				215.000	E 1/2	
UNIT	87.00	116.00	4	C	3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				215.000	E 1/2	
UNIT	87.00	116.00	4	C	2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				215.000	E 1/2	

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	87.00	116.00	4	C	1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	2			215.000	E 1/2	Y
UNIT	87.00	116.00	4	C	1	LITH	DEBITAGE	CHUNK		QUARTZ				215.000	E 1/2	
PPLOT	87.00	116.00	4	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		RIM	UNDECOR	216.001	E 1/2, Artifact # 1	
**	NORTH	91.00 / WEST	90.00													
STP	91.00	90.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				143.000		
STP	91.00	90.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				143.000		
STP	91.00	90.00	0		1	HIST	OTHER	UNDETERMINED						143.000		N
STP	91.00	90.00	0		2	LITH	DEBITAGE	CHUNK		QUARTZ				143.000		
STP	91.00	90.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				143.000		
STP	91.00	90.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				143.000		
**	NORTH	91.00 / WEST	95.00													
STP	91.00	95.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE	LT GRN	CHERT				130.000		
STP	91.00	95.00	0		3	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				130.000		
STP	91.00	95.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				130.000		
STP	91.00	95.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	238			130.000		Y
STP	91.00	95.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				130.000		
STP	91.00	95.00	0		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				130.000		
STP	91.00	95.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				130.000		
STP	91.00	95.00	0		1	LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZ				130.001		
**	NORTH	91.00 / WEST	100.00													
STP	91.00	100.00	0		1	LITH	DEBITAGE	CHUNK	MED GRY	CHERT				116.000		
**	NORTH	91.00 / WEST	105.00													
STP	91.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				101.000		
STP	91.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				101.000		
STP	91.00	105.00	0		2	LITH	DEBITAGE	CHUNK		QUARTZ				101.000		
STP	91.00	105.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE	BROWN/T	CHERT				101.000		
STP	91.00	105.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				101.000		
STP	91.00	105.00	0		2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	101.000		
STP	91.00	105.00	0		4	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	46			101.000		Y
STP	91.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				101.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	91.00	105.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK GRY	CHERT				101.000		
STP	91.00	105.00	0	1 CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	101.001		
STP	91.00	105.00	0	1 CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	101.002		
STP	91.00	105.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	101.003		
**	NORTH	91.00 / WEST 110.00												
STP	91.00	110.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZITE				86.000		
STP	91.00	110.00	0	3 LITH	DEBITAGE	CHUNK		QUARTZ				86.000		
STP	91.00	110.00	0	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	9			86.000		Y
STP	91.00	110.00	0	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	86.000		
STP	91.00	110.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				86.000		
STP	91.00	110.00	0	1 CER	VESSEL	(SHERDLET)		CORD-SURF			UNDECOR	86.000		
STP	91.00	110.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				86.000		
STP	91.00	110.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				86.000		
STP	91.00	110.00	0	1 CER	VESSEL	STEATITE-TEMPERED		CORD-SURF		BODY	UNDECOR	86.001		
STP	91.00	110.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	86.002		
STP	91.00	110.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	86.003		
STP	91.00	110.00	0	1 CER	VESSEL	SAND & SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	86.004		
STP	91.00	110.00	0	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				86.005		
**	NORTH	91.00 / WEST 115.00												
STP	91.00	115.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	BLACK	CHERT				70.000		
STP	91.00	115.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				70.000		
STP	91.00	115.00	0	3 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				70.000		
STP	91.00	115.00	0	3 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				70.000		
STP	91.00	115.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				70.000		
STP	91.00	115.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				70.000		
STP	91.00	115.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	6			70.000		Y
STP	91.00	115.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				70.000		
STP	91.00	115.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE	MOT GRN	CHERT				70.000		
STP	91.00	115.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				70.000		
STP	91.00	115.00	0	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				70.000		
STP	91.00	115.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				70.000		
STP	91.00	115.00	0	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	70.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	91.00	115.00	0	2 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				70.000		
STP	91.00	115.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				70.000		
STP	91.00	115.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				70.000		
STP	91.00	115.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	70.001		
STP	91.00	115.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	70.002		
STP	91.00	115.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	70.003		
STP	91.00	115.00	0	1 LITH	DEBITAGE	MULTIFACIAL FLAKE CORE	LT GRN	CHERT				70.004		
**	NORTH	91.00 / WEST	120.00											
STP	91.00	120.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				54.000		
STP	91.00	120.00	0	4 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				54.000		
STP	91.00	120.00	0	5 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				54.000		
STP	91.00	120.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				54.000		
STP	91.00	120.00	0	3 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				54.000		
STP	91.00	120.00	0	2 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				54.000		
STP	91.00	120.00	0	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				54.001		
STP	91.00	120.00	0	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				54.002		
**	NORTH	91.00 / WEST	125.00											
STP	91.00	125.00	0	1 CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	39.001		
**	NORTH	92.50 / WEST	110.00											
PPLOT	92.50	110.00	0	1 LITH	BIFACE	UNCLASSIFIABLE POINT	BLACK/T	CHERT		TIP		10.001	Grab sample # 3	
**	NORTH	96.00 / WEST	90.00											
STP	96.00	90.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				142.000		
STP	96.00	90.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	12			142.000		Y
STP	96.00	90.00	0	2 FLOR	WOOD			UNCARBON				142.000		N
STP	96.00	90.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	142.001		
STP	96.00	90.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	142.002		
STP	96.00	90.00	0	1 CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	142.003		
**	NORTH	96.00 / WEST	95.00											
STP	96.00	95.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				129.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	96.00	95.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	4			129.000		Y
STP	96.00	95.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				129.000		
STP	96.00	95.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				129.000		
STP	96.00	95.00	0	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				129.000		
STP	96.00	95.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				129.000		
STP	96.00	95.00	0	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				129.000		
STP	96.00	95.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				129.000		
STP	96.00	95.00	0	2 FLOR	WOOD			UNCARBON				129.000		N
STP	96.00	95.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	129.001		
STP	96.00	95.00	0	1 CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	129.002		
STP	96.00	95.00	0	1 CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	129.003		
**	NORTH	96.00 / WEST 100.00												
STP	96.00	100.00	0	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				115.000		
STP	96.00	100.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	BLACK	CHERT				115.000		
STP	96.00	100.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				115.000		
STP	96.00	100.00	0	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	164			115.000		Y
STP	96.00	100.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				115.000		
STP	96.00	100.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	LT GRY	CHERT				115.000		
STP	96.00	100.00	0	2 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	115.000		
STP	96.00	100.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				115.000		
STP	96.00	100.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				115.000		
STP	96.00	100.00	0	1 CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	115.001		
STP	96.00	100.00	0	1 CER	VESSEL	SHELL-TEMPERED		NET-SURF		BODY	UNDECOR	115.002		
STP	96.00	100.00	0	1 CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	115.002		
STP	96.00	100.00	0	1 CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	115.004		
**	NORTH	96.00 / WEST 105.00												
STP	96.00	105.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				100.000		
STP	96.00	105.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				100.000		
STP	96.00	105.00	0	2 FAUN	BONE	UNDETERMINED				FRAG	UNBURNED	100.000		
STP	96.00	105.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK RED	CHERT				100.000		
STP	96.00	105.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				100.000		
STP	96.00	105.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				100.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	96.00	105.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				100.000		
STP	96.00	105.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	6			100.000		Y
STP	96.00	105.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	100.001		
STP	96.00	105.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	100.002		
STP	96.00	105.00	0	1 CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	100.003		
**	NORTH	96.00 / WEST 107.50												
PPLOT	96.00	107.50	0	1 LITH	BIFACE	TRIANGULAR POINT		QUARTZ		WHOLE		9.001	Grab sample # 2	
**	NORTH	96.00 / WEST 110.00												
STP	96.00	110.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	1			85.000		Y
STP	96.00	110.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				85.000		
STP	96.00	110.00	0	4 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				85.000		
STP	96.00	110.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				85.000		
STP	96.00	110.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				85.000		
STP	96.00	110.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				85.000		
STP	96.00	110.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				85.000		
STP	96.00	110.00	0	1 CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	85.001		
STP	96.00	110.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	85.002		
STP	96.00	110.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	85.003		
STP	96.00	110.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	85.004		
STP	96.00	110.00	0	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				85.005		
**	NORTH	96.00 / WEST 115.00												
STP	96.00	115.00	0	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	21			69.000		Y
STP	96.00	115.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				69.000		
STP	96.00	115.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				69.000		
STP	96.00	115.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				69.000		
STP	96.00	115.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				69.000		
STP	96.00	115.00	0	3 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	69.000		
STP	96.00	115.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE	BLACK/T	CHERT				69.000		
STP	96.00	115.00	0	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				69.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH	96.00 / WEST 120.00														
STP	96.00	120.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				53.000		
STP	96.00	120.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE	MED GRY	CHERT				53.000		
STP	96.00	120.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				53.000		
STP	96.00	120.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE	LT GRN	CHERT				53.000		
STP	96.00	120.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	LT GRN	CHERT				53.000		
STP	96.00	120.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				53.000		
STP	96.00	120.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				53.000		
**	NORTH	96.00 / WEST 125.00														
STP	96.00	125.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				38.000		
STP	96.00	125.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				38.000		
STP	96.00	125.00	0		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	38.001		
**	NORTH	101.00 / WEST 80.00														
STP	101.00	80.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				160.000		
STP	101.00	80.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	160.000		
STP	101.00	80.00	0		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				160.000		
STP	101.00	80.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				160.000		
STP	101.00	80.00	0		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				160.000		
STP	101.00	80.00	0		1	CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	160.001		
**	NORTH	101.00 / WEST 85.00														
STP	101.00	85.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				152.000		
STP	101.00	85.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	MED GRY	CHERT				152.000		
STP	101.00	85.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZITE				152.000		
STP	101.00	85.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	152.000		
STP	101.00	85.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	152.001		
**	NORTH	101.00 / WEST 90.00														
STP	101.00	90.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				141.000		
STP	101.00	90.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE				141.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 101.00 / WEST 95.00															
STP	101.00	95.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				128.000		
STP	101.00	95.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				128.000		
STP	101.00	95.00	0		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				128.000		
STP	101.00	95.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				128.000		
STP	101.00	95.00	0		1	LITH	BIFACE	UNCLASSIFIABLE POINT		QUARTZITE		MID-SEC		128.001		
**	NORTH 101.00 / WEST 100.00															
STP	101.00	100.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				114.000		
STP	101.00	100.00	0		2	LITH	OTHER	FIRE-CRACKED ROCK		CHERT	3			114.000		Y
STP	101.00	100.00	0		1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BASE	UNDECOR	114.001		
**	NORTH 101.00 / WEST 105.00															
STP	101.00	105.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				99.000		
STP	101.00	105.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				99.000		
**	NORTH 101.00 / WEST 110.00															
STP	101.00	110.00	0		1	CER	VESSEL	(SHERDLET)		CORD-SURF			UNDECOR	84.000		
STP	101.00	110.00	0		2	LITH	DEBITAGE	CHUNK		QUARTZ				84.000		
STP	101.00	110.00	0		7	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	184			84.000		Y
STP	101.00	110.00	0		1	CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	84.001		
STP	101.00	110.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	84.002		
STP	101.00	110.00	0		1	LITH	OTHER	UNMODIFIED		QUARTZITE				84.003		
**	NORTH 101.00 / WEST 115.00															
STP	101.00	115.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				68.000		
STP	101.00	115.00	0		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				68.000		
STP	101.00	115.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	1			68.000		Y
STP	101.00	115.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				68.000		
STP	101.00	115.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				68.000		
STP	101.00	115.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE	DRK YEL	CHERT				68.000		
STP	101.00	115.00	0		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZITE				68.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 101.00 / WEST 120.00															
STP	101.00	120.00	0		2	LITH	DEBITAGE	CHUNK		QUARTZ				52.000		
STP	101.00	120.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	14			52.000		Y
STP	101.00	120.00	0		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZITE				52.001		
**	NORTH 101.00 / WEST 125.00															
STP	101.00	125.00	0		2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				37.000		
STP	101.00	125.00	0		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				37.000		
**	NORTH 101.00 / WEST 140.00															
STP	101.00	140.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				23.000		
STP	101.00	140.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				23.000		
STP	101.00	140.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				23.000		
STP	101.00	140.00	0		1	HIST	NAIL	20TH CENTURY						23.000		N
**	NORTH 101.00 / WEST 150.00															
STP	101.00	150.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK RED	CHERT				13.000		
STP	101.00	150.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				13.000		
STP	101.00	150.00	0		1	LITH	OTHER	UNMODIFIED		CHERT				13.000		Y
**	NORTH 104.00 / WEST 135.50															
PPLOT	104.00	135.50	0		1	LITH	BIFACE	SIDE-NOTCHED POINT		QUARTZITE		BASE		11.001	Grab sample # 4	
**	NORTH 106.00 / WEST 80.00															
STP	106.00	80.00	0		1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	159.001		
**	NORTH 106.00 / WEST 90.00															
STP	106.00	90.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				140.000		
STP	106.00	90.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				140.000		
STP	106.00	90.00	0		2	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				140.000		
STP	106.00	90.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				140.000		
STP	106.00	90.00	0		1	CER	VESSEL	QUARTZ & SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	140.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 106.00 / WEST 95.00															
STP	106.00	95.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				127.000		
STP	106.00	95.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				127.000		
**	NORTH 106.00 / WEST 100.00															
STP	106.00	100.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				113.000		
STP	106.00	100.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				113.000		
STP	106.00	100.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	2			113.000		Y
STP	106.00	100.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				113.000		
STP	106.00	100.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				113.000		
STP	106.00	100.00	0		1	FLOR	WOOD			CABONIZED				113.000		N
**	NORTH 106.00 / WEST 105.00															
STP	106.00	105.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				98.000		
STP	106.00	105.00	0		3	LITH	DEBITAGE	CHUNK		QUARTZ				98.000		
STP	106.00	105.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				98.000		
STP	106.00	105.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				98.000		
STP	106.00	105.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				98.000		
STP	106.00	105.00	0		3	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				98.000		
STP	106.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				98.000		
STP	106.00	105.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				98.000		
STP	106.00	105.00	0		1	CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	98.001		
**	NORTH 106.00 / WEST 110.00															
STP	106.00	110.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				83.000		
STP	106.00	110.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	141			83.000		Y
STP	106.00	110.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				83.000		
STP	106.00	110.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				83.000		
STP	106.00	110.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZITE				83.000		
STP	106.00	110.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				83.000		
**	NORTH 106.00 / WEST 115.00															
STP	106.00	115.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				67.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 106.00 / WEST 120.00															
STP	106.00	120.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				51.000		
STP	106.00	120.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				51.000		
**	NORTH 106.00 / WEST 125.00															
STP	106.00	125.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				36.000		
**	NORTH 107.00 / WEST 105.00															
PPLOT	107.00	105.00	0		1	LITH	BIFACE	LANCEOLATE POINT		QUARTZ		BASE		352.001	Grab sample # 7	
**	NORTH 108.00 / WEST 140.00															
PPLOT	108.00	140.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	12.001	Grab sample # 5	
**	NORTH 111.00 / WEST 80.00															
STP	111.00	80.00	0		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	158.001		
**	NORTH 111.00 / WEST 85.00															
STP	111.00	85.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				151.000		
STP	111.00	85.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				151.000		
STP	111.00	85.00	0		1	CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	151.001		
**	NORTH 111.00 / WEST 90.00															
STP	111.00	90.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				139.000		
STP	111.00	90.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	1			139.000		Y
STP	111.00	90.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				139.000		
STP	111.00	90.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				139.000		
STP	111.00	90.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				139.000		
STP	111.00	90.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				139.000		
STP	111.00	90.00	0		1	LITH	BIFACE	CONTRACTING-STEMMED POINT		QUARTZITE		BASE		139.001		
**	NORTH 111.00 / WEST 95.00															
STP	111.00	95.00	0		2	LITH	DEBITAGE	CHUNK		QUARTZ				126.000		
STP	111.00	95.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	1			126.000		Y
STP	111.00	95.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				126.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	111.00	95.00	0	1 CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	126.001		
**	NORTH 111.00 / WEST 100.00													
STP	111.00	100.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		CHERT	17			112.000		Y
STP	111.00	100.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				112.000		
STP	111.00	100.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				112.000		
STP	111.00	100.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				112.000		
STP	111.00	100.00	0	4 LITH	DEBITAGE	CHUNK		QUARTZ				112.000		
STP	111.00	100.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				112.000		
STP	111.00	100.00	0	1 CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	112.001		
**	NORTH 111.00 / WEST 105.00													
STP	111.00	105.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				97.000		
STP	111.00	105.00	0	1 CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	97.001		
**	NORTH 111.00 / WEST 110.00													
STP	111.00	110.00	0	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	82.000		
STP	111.00	110.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				82.000		
STP	111.00	110.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				82.000		
STP	111.00	110.00	0	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				82.000		
STP	111.00	110.00	0	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				82.000		
STP	111.00	110.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				82.000		
STP	111.00	110.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				82.000		
STP	111.00	110.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				82.000		
STP	111.00	110.00	0	1 CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	82.001		
STP	111.00	110.00	0	1 CER	VESSEL	SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	82.002		
**	NORTH 111.00 / WEST 115.00													
STP	111.00	115.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				66.000		
STP	111.00	115.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	76			66.000		Y
STP	111.00	115.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	66.001		
STP	111.00	115.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		FABRIC-SURF		BODY	UNDECOR	66.002		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 111.00 / WEST 120.00													
STP	111.00	120.00	0	2 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				50.000		
STP	111.00	120.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	48			50.000		Y
STP	111.00	120.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK RED	CHERT				50.000		
STP	111.00	120.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				50.000		
STP	111.00	120.00	0	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		LATERAL		50.001		
STP	111.00	120.00	0	1 CER	VESSEL	QUARTZ & SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	50.002		
**	NORTH 114.00 / WEST 101.50													
PPLOT	114.00	101.50	0	1 LITH	BIFACE	CONTRACTING-STEMMED POINT		QUARTZITE		BASE		351.001	Grab sample # 6	
**	NORTH 115.00 / WEST 105.00													
UNIT	115.00	105.00	1 A	4 LITH	OTHER	FIRE-CRACKED ROCK		CHERT	7			309.000		Y
UNIT	115.00	105.00	1 A	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				309.000		
UNIT	115.00	105.00	1 A	1 HIST	OTHER	MODERN						309.000		Y
UNIT	115.00	105.00	1 A	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				309.000		
UNIT	115.00	105.00	1 A	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	309.000		
UNIT	115.00	105.00	1 A	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				309.000		
UNIT	115.00	105.00	1 A	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	309.001		
UNIT	115.00	105.00	1 A	1 CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	309.002		
UNIT	115.00	105.00	1 A	1 CER	VESSEL	QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	309.003		
UNIT	115.00	105.00	2 B	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	310.000		
UNIT	115.00	105.00	2 B	3 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				310.000		
UNIT	115.00	105.00	2 B	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	310.000		
UNIT	115.00	105.00	2 B	3 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	6			310.000		Y
UNIT	115.00	105.00	2 B	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				310.000		
UNIT	115.00	105.00	2 B	1 CER	VESSEL	SHELL-TEMPERED		NET-SURF		BODY	UNDECOR	310.001		
UNIT	115.00	105.00	2 B	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	310.002		
UNIT	115.00	105.00	2 B	1 CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	310.003		
UNIT	115.00	105.00	2 B	1 LITH	BIFACE	TRIANGULAR POINT	MOT BLK	CHERT		FRAG		310.004		
UNIT	115.00	105.00	3 C	2 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	311.000		
UNIT	115.00	105.00	3 C	1 LITH	OTHER	FIRE-CRACKED ROCK		CHERT	1			311.000		Y
UNIT	115.00	105.00	3 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				311.000		
UNIT	115.00	105.00	3 C	1 LITH	DEBITAGE	SECONDARY FLAKE	BLACK	CHERT				311.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	115.00	105.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	311.001		
UNIT	115.00	105.00	4	C	1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				312.000		
UNIT	115.00	105.00	4	C	1	LITH	OTHER	FIRE-CRACKED ROCK		CHERT	2			312.000		Y
UNIT	115.00	105.00	4	C	2	LITH	DEBITAGE	CHUNK		QUARTZ				312.000		
UNIT	115.00	105.00	4	C	1	LITH	DEBITAGE	CHUNK		QUARTZITE				312.000		
UNIT	115.00	105.00	4	C	1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				312.000		
PPLOT	115.00	105.00	5	C	1	LITH	BIFACE	UNCLASSIFIABLE POINT		QUARTZ		TIP		314.001	Artifact # 1	
UNIT	115.00	105.00	6	C	2	LITH	OTHER	UNMODIFIED		QUARTZITE	1			315.000		Y
**	NORTH 115.00 / WEST 109.00															
UNIT	115.00	109.00	1	A	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				300.000		
UNIT	115.00	109.00	1	A	3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				300.000		
UNIT	115.00	109.00	1	A	1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				300.000		
UNIT	115.00	109.00	1	A	1	HIST	OTHER	MODERN						300.000		Y
UNIT	115.00	109.00	1	A	2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	300.000		
UNIT	115.00	109.00	1	A	2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	300.000		
UNIT	115.00	109.00	1	A	4	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	29			300.000		Y
UNIT	115.00	109.00	1	A	2	LITH	DEBITAGE	CHUNK		QUARTZ				300.000		
UNIT	115.00	109.00	1	A	1	FAUN	SHELL	OYSTER				FRAG	UNBURNED	300.000		
UNIT	115.00	109.00	1	A	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	300.001		
UNIT	115.00	109.00	2	B	3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				301.000		
UNIT	115.00	109.00	2	B	2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				301.000		
UNIT	115.00	109.00	2	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				301.000		
UNIT	115.00	109.00	2	B	3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				301.000		
UNIT	115.00	109.00	2	B	8	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	301.000		
UNIT	115.00	109.00	2	B	1	LITH	DEBITAGE	PRIMARY FLAKE	BLACK	CHERT				301.000		
UNIT	115.00	109.00	2	B	4	FAUN	SHELL	OYSTER				FRAG	UNBURNED	301.000		
UNIT	115.00	109.00	2	B	1	LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				301.000		
UNIT	115.00	109.00	2	B	4	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				301.000		
UNIT	115.00	109.00	2	B	4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				301.000		
UNIT	115.00	109.00	2	B	1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				301.000		
UNIT	115.00	109.00	2	B	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				301.000		
UNIT	115.00	109.00	2	B	5	LITH	DEBITAGE	CHUNK		QUARTZ				301.000		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	301.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	115.00	109.00	2	B	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				301.000		
UNIT	115.00	109.00	2	B	1	HIST	OTHER	MODERN						301.000		Y
UNIT	115.00	109.00	2	B	2	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	35			301.000		Y
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	301.001		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	301.002		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	301.003		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	301.004		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	301.005		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	301.006		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	301.007		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	301.008		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	301.009		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	301.010		
UNIT	115.00	109.00	2	B	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	301.011		
UNIT	115.00	109.00	2	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				301.012		
UNIT	115.00	109.00	3	C	2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				302.000		
UNIT	115.00	109.00	3	C	1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				302.000		
UNIT	115.00	109.00	3	C	2	FAUN	BONE	UNDETERMINED				FRAG	BURNED	302.000		
UNIT	115.00	109.00	3	C	2	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	31			302.000		Y
UNIT	115.00	109.00	3	C	5	LITH	DEBITAGE	CHUNK		QUARTZ				302.000		
UNIT	115.00	109.00	3	C	2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	302.000		
UNIT	115.00	109.00	3	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				302.000		
UNIT	115.00	109.00	3	C	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				302.000		
UNIT	115.00	109.00	3	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				302.000		
UNIT	115.00	109.00	3	C	2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				302.000		
UNIT	115.00	109.00	3	C	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				302.000		
UNIT	115.00	109.00	3	C	1	CER	VESSEL	(SHERDLET)		CORD-SURF			UNDECOR	302.000		
UNIT	115.00	109.00	3	C	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	302.001		
UNIT	115.00	109.00	3	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	302.002		
UNIT	115.00	109.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	302.003		
UNIT	115.00	109.00	3	C	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	302.004		
UNIT	115.00	109.00	3	C	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	302.005		
UNIT	115.00	109.00	3	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	302.006		
UNIT	115.00	109.00	3	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	302.007		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	115.00	109.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	303.001	Artifact # 1	
PPLOT	115.00	109.00	3	C	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	304.001	Artifact # 2	
PPLOT	115.00	109.00	3	C	1	CER	VESSEL	SAND-TEMPERED		NET-SURF		BODY	UNDECOR	305.001	Artifact # 3	
UNIT	115.00	109.00	4	C	1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				306.000		
UNIT	115.00	109.00	4	C	2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				306.000		
UNIT	115.00	109.00	4	C	2	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	60			306.000		Y
UNIT	115.00	109.00	4	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				306.000		
UNIT	115.00	109.00	4	C	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				306.000		
UNIT	115.00	109.00	4	C	8	LITH	DEBITAGE	CHUNK		QUARTZ				306.000		
UNIT	115.00	109.00	4	C	1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				306.000		
UNIT	115.00	109.00	4	C	4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				306.000		
UNIT	115.00	109.00	4	C	5	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	306.000		
UNIT	115.00	109.00	4	C	1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	306.000		
UNIT	115.00	109.00	4	C	1	CER	VESSEL	QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	306.001		
UNIT	115.00	109.00	4	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	306.002		
UNIT	115.00	109.00	4	C	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	306.003		
PPLOT	115.00	109.00	4	C	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	307.001	Artifact # 1	
UNIT	115.00	109.00	5	D	2	FAUN	BONE	UNDETERMINED				FRAG	BURNED	308.000		
UNIT	115.00	109.00	5	D	3	LITH	DEBITAGE	CHUNK		QUARTZ				308.000		
UNIT	115.00	109.00	5	D	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				308.000		
UNIT	115.00	109.00	5	D	1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	131			308.000		Y
UNIT	115.00	109.00	5	D	1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	308.000		
**	NORTH	116.00 /	WEST	75.00												
STP	116.00	75.00	0		1	LITH	UNIFACE	RETOUCHED PRIMARY FLAKE	DRK RED	CHERT		FRAG	HEAT DAMMG	164.001		
**	NORTH	116.00 /	WEST	85.00												
STP	116.00	85.00	0		3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				150.000		
STP	116.00	85.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				150.000		
**	NORTH	116.00 /	WEST	90.00												
STP	116.00	90.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZITE				138.000		
STP	116.00	90.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				138.000		
STP	116.00	90.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				138.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 116.00 / WEST 95.00															
STP	116.00	95.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				125.000		
STP	116.00	95.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				125.000		
STP	116.00	95.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				125.000		
STP	116.00	95.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	125.000		
STP	116.00	95.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				125.000		
STP	116.00	95.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				125.000		
**	NORTH 116.00 / WEST 100.00															
STP	116.00	100.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				111.000		
STP	116.00	100.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				111.000		
STP	116.00	100.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	1			111.000		Y
STP	116.00	100.00	0		1	CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	111.001		
STP	116.00	100.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	111.002		
**	NORTH 116.00 / WEST 105.00															
STP	116.00	105.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				96.000		
STP	116.00	105.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				96.000		
STP	116.00	105.00	0		1	CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	96.001		
**	NORTH 116.00 / WEST 110.00															
STP	116.00	110.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	81.000		
STP	116.00	110.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				81.000		
STP	116.00	110.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				81.000		
STP	116.00	110.00	0		2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	81.000		
STP	116.00	110.00	0		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	81.001		
STP	116.00	110.00	0		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	81.002		
STP	116.00	110.00	0		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	81.003		
STP	116.00	110.00	0		1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	81.004		
STP	116.00	110.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	81.005		
STP	116.00	110.00	0		1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		FRAG		81.006		
STP	116.00	110.00	0		1	LITH	UNIFACE	UNCLASSIFIABLE SCRAPER		QUARTZITE		FRAG		81.007		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 116.00 / WEST 115.00															
STP	116.00	115.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	65.000		
STP	116.00	115.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				65.000		
STP	116.00	115.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				65.000		
STP	116.00	115.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				65.000		
STP	116.00	115.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				65.000		
STP	116.00	115.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK GRY	CHERT				65.000		
STP	116.00	115.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	65.001		
STP	116.00	115.00	0		1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		LATERAL		65.002		
**	NORTH 116.00 / WEST 120.00															
STP	116.00	120.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE	BLACK/T	CHERT				49.000		
STP	116.00	120.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				49.000		
STP	116.00	120.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE	DRK YEL	CHERT				49.000		
STP	116.00	120.00	0		1	CER	VESSEL	SAND & SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	49.001		
STP	116.00	120.00	0		1	CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	49.002		
STP	116.00	120.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ				49.003		
**	NORTH 116.00 / WEST 125.00															
STP	116.00	125.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE	DRK GRY	CHERT				35.000		
**	NORTH 118.00 / WEST 110.00															
UNIT	118.00	110.00	1	B	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				282.000		
UNIT	118.00	110.00	1	B	2	LITH	DEBITAGE	CHUNK		QUARTZ				282.000		
UNIT	118.00	110.00	1	B	1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				282.000		
UNIT	118.00	110.00	1	B	1	LITH	DEBITAGE	SECONDARY FLAKE	CREAM	CHERT				282.000		
UNIT	118.00	110.00	1	B	1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				282.000		
UNIT	118.00	110.00	1	B	1	HIST	OTHER	MODERN						282.000		Y
UNIT	118.00	110.00	1	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				282.000		
UNIT	118.00	110.00	1	B	2	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	8			282.000		Y
UNIT	118.00	110.00	1	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				282.000		
UNIT	118.00	110.00	1	B	3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				282.000		
UNIT	118.00	110.00	1	B	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				282.000		
UNIT	118.00	110.00	1	B	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				282.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	118.00	110.00	1	B	1	CER	VESSEL	QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	282.001		
UNIT	118.00	110.00	1	B	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	282.002		
UNIT	118.00	110.00	1	B	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	282.003		
UNIT	118.00	110.00	1	B	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	282.004		
UNIT	118.00	110.00	1	B	1	CER	VESSEL	QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	282.005		
UNIT	118.00	110.00	1	B	1	CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	282.006		
UNIT	118.00	110.00	2	B	1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	283.000		
UNIT	118.00	110.00	2	B	2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	283.000		
UNIT	118.00	110.00	2	B	7	LITH	DEBITAGE	CHUNK		QUARTZ				283.000		
UNIT	118.00	110.00	2	B	4	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	283.000		
UNIT	118.00	110.00	2	B	3	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				283.000		
UNIT	118.00	110.00	2	B	4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				283.000		
UNIT	118.00	110.00	2	B	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				283.000		
UNIT	118.00	110.00	2	B	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				283.000		
UNIT	118.00	110.00	2	B	3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				283.000		
UNIT	118.00	110.00	2	B	1	HIST	OTHER	MODERN						283.000		Y
UNIT	118.00	110.00	2	B	2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				283.000		
UNIT	118.00	110.00	2	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				283.000		
UNIT	118.00	110.00	2	B	1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				283.000		
UNIT	118.00	110.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	283.001		
UNIT	118.00	110.00	2	B	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	283.002		
UNIT	118.00	110.00	2	B	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	283.003		
UNIT	118.00	110.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	283.004		
UNIT	118.00	110.00	2	B	1	LITH	UNIFACE	RETOUCHED BIPOLAR FLAKE		QUARTZITE		FRAG		283.005		
PPLOT	118.00	110.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	284.001	Artifact # 1	
PPLOT	118.00	110.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	285.001	Artifact # 2	
PPLOT	118.00	110.00	2	B	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		FABRIC-SURF		BODY	UNDECOR	286.001	Artifact # 3	
UNIT	118.00	110.00	3	C	1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				287.000		
UNIT	118.00	110.00	3	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				287.000		
UNIT	118.00	110.00	3	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				287.000		
UNIT	118.00	110.00	3	C	1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	14			287.000		Y
UNIT	118.00	110.00	3	C	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				287.000		
UNIT	118.00	110.00	3	C	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				287.000		
UNIT	118.00	110.00	3	C	6	FAUN	BONE	UNDETERMINED				FRAG	BURNED	287.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	118.00	110.00	3 C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				287.000		
UNIT	118.00	110.00	3 C	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				287.000		
UNIT	118.00	110.00	3 C	3 LITH	DEBITAGE	CHUNK		QUARTZ				287.000		
UNIT	118.00	110.00	3 C	1 LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				287.000		
UNIT	118.00	110.00	3 C	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				287.000		
UNIT	118.00	110.00	3 C	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				287.000		
PPLOT	118.00	110.00	3 C	1 CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	288.001	Sherd # 1	
PPLOT	118.00	110.00	3 C	1 CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	289.001	Sherd # 2	
PPLOT	118.00	110.00	3 C	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	290.001	Sherd # 3	
PPLOT	118.00	110.00	3 C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	291.001	Sherd # 4	
PPLOT	118.00	110.00	3 C	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	292.001	Sherd # 5	
PPLOT	118.00	110.00	3 C	1 LITH	BIFACE	UNCLASSIFIABLE POINT		QUARTZ		MID-SEC		293.001	Lithic # 1	
PPLOT	118.00	110.00	3 C	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	74			294.000	FCR	Y
UNIT	118.00	110.00	4 C	2 LITH	OTHER	FIRE-CRACKED ROCK		SHALE	4			295.000		Y
UNIT	118.00	110.00	4 C	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				295.000		
UNIT	118.00	110.00	4 C	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				295.000		
UNIT	118.00	110.00	4 C	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				295.000		
UNIT	118.00	110.00	4 C	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				295.000		
UNIT	118.00	110.00	4 C	1 CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	295.001		
PPLOT	118.00	110.00	4 C	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	296.001	Artifact # 1	
PPLOT	118.00	110.00	4 C	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	297.001	Artifact # 2	
UNIT	118.00	110.00	5 C	1 LITH	OTHER	FIRE-CRACKED ROCK		CHERT	5			298.000		Y
UNIT	118.00	110.00	5 C	1 LITH	UNIFACE	RETOUCHED BIPOLAR FLAKE		QUARTZ		WHOLE		298.001		
UNIT	118.00	110.00	6 D	1 LITH	DEBITAGE	CHUNK		QUARTZ				299.000		
**	NORTH 119.00 / WEST 116.50													
PPLOT	119.00	116.50	0	1 LITH	BIFACE	TRIANGULAR POINT	DRK YEL	CHERT		BASE		8.001	Grab sample # 1	
**	NORTH 121.00 / WEST 70.00													
STP	121.00	70.00	0	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		RHYOLITE				168.000		
STP	121.00	70.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	168.001		
**	NORTH 121.00 / WEST 80.00													
STP	121.00	80.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				157.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	121.00	80.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				157.000		
**	NORTH 121.00 / WEST 85.00															
STP	121.00	85.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				149.000		
STP	121.00	85.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				149.000		
STP	121.00	85.00	0		5	FAUN	BONE	UNDETERMINED				FRAG	BURNED	149.000		
**	NORTH 121.00 / WEST 90.00															
STP	121.00	90.00	0		2	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	60			137.000		Y
STP	121.00	90.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				137.000		
STP	121.00	90.00	0		2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				137.000		
STP	121.00	90.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		LIMONITE				137.000		
STP	121.00	90.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK RED	CHERT				137.000		
STP	121.00	90.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				137.000		
**	NORTH 121.00 / WEST 95.00															
STP	121.00	95.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	18			124.000		Y
STP	121.00	95.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				124.000		
STP	121.00	95.00	0		1	LITH	OTHER	UNMODIFIED		STEATITE	22			124.000		N
STP	121.00	95.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				124.000		
STP	121.00	95.00	0		1	CER	VESSEL	SAND-TEMPERED		NET-SURF		BODY	UNDECOR	124.001		
STP	121.00	95.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	124.002		
**	NORTH 121.00 / WEST 100.00															
STP	121.00	100.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				110.000		
STP	121.00	100.00	0		2	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	8			110.000		Y
STP	121.00	100.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				110.000		
STP	121.00	100.00	0		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	110.001		
**	NORTH 121.00 / WEST 105.00															
STP	121.00	105.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				95.000		
STP	121.00	105.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	7			95.000		Y
STP	121.00	105.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				95.000		
STP	121.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				95.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	121.00	105.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				95.000		
STP	121.00	105.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BASE	UNDECOR	95.001		
STP	121.00	105.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	95.002		
**	NORTH 121.00 / WEST 110.00													
STP	121.00	110.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				80.000		
STP	121.00	110.00	0	5 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				80.000		
STP	121.00	110.00	0	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	80.000		
STP	121.00	110.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	80.001		
STP	121.00	110.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	80.002		
STP	121.00	110.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	80.003		
STP	121.00	110.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	80.004		
**	NORTH 121.00 / WEST 115.00													
STP	121.00	115.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	2			64.000		Y
STP	121.00	115.00	0	2 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZITE				64.000		
STP	121.00	115.00	0	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				64.000		
**	NORTH 121.00 / WEST 120.00													
STP	121.00	120.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				48.000		
STP	121.00	120.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE	BLACK/T	CHERT				48.000		
STP	121.00	120.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	3			48.000		Y
**	NORTH 121.00 / WEST 125.00													
STP	121.00	125.00	0	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	25			34.000		Y
STP	121.00	125.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				34.000		
STP	121.00	125.00	0	1 CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	INCISED	34.001		
**	NORTH 126.00 / WEST 70.00													
STP	126.00	70.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				167.000		
STP	126.00	70.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				167.000		
**	NORTH 126.00 / WEST 75.00													
STP	126.00	75.00	0	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				163.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	126.00	75.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				163.000		
STP	126.00	75.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				163.000		
STP	126.00	75.00	0		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				163.000		
STP	126.00	75.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	14			163.000		Y
STP	126.00	75.00	0		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				163.000		
STP	126.00	75.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				163.000		
**	NORTH 126.00 / WEST 80.00															
STP	126.00	80.00	0		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				156.000		
**	NORTH 126.00 / WEST 85.00															
STP	126.00	85.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				148.000		
**	NORTH 126.00 / WEST 90.00															
STP	126.00	90.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	136.000		
STP	126.00	90.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				136.000		
STP	126.00	90.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				136.000		
STP	126.00	90.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	8			136.000		Y
STP	126.00	90.00	0		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				136.001		
**	NORTH 126.00 / WEST 95.00															
STP	126.00	95.00	0		4	LITH	DEBITAGE	CHUNK		QUARTZ				123.000		
STP	126.00	95.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				123.000		
STP	126.00	95.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				123.000		
STP	126.00	95.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				123.000		
STP	126.00	95.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE	DRK YEL	CHERT				123.000		
STP	126.00	95.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				123.000		
STP	126.00	95.00	0		1	CER	VESSEL	SHELL-TEMPERED		NET-SURF		BODY	UNDECOR	123.001		
**	NORTH 126.00 / WEST 100.00															
STP	126.00	100.00	0		2	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	83			109.000		Y
STP	126.00	100.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				109.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 126.00 / WEST 105.00															
STP	126.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				94.000		
STP	126.00	105.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				94.000		
STP	126.00	105.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				94.000		
STP	126.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				94.000		
**	NORTH 126.00 / WEST 110.00															
STP	126.00	110.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				79.000		
STP	126.00	110.00	0		2	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	36			79.000		Y
STP	126.00	110.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	79.001		
STP	126.00	110.00	0		1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	79.002		
**	NORTH 126.00 / WEST 115.00															
STP	126.00	115.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				63.000		
STP	126.00	115.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	35			63.000		Y
STP	126.00	115.00	0		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				63.001		
**	NORTH 126.00 / WEST 120.00															
STP	126.00	120.00	0		2	LITH	DEBITAGE	CHUNK		QUARTZ				47.000		
STP	126.00	120.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				47.000		
STP	126.00	120.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	110			47.000		Y
STP	126.00	120.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	VARIE/T	CHERT				47.000		
STP	126.00	120.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				47.000		
STP	126.00	120.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				47.000		
STP	126.00	120.00	0		1	CER	VESSEL	SAND & SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	47.001		
STP	126.00	120.00	0		1	LITH	BIFACE	EXPANDING-STEMMED POINT		QUARTZ		BASE		47.002		
**	NORTH 126.50 / WEST 120.50															
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	SECONDARY FLAKE	DRK GRY	CHERT				179.000		
UNIT	126.50	120.50	1	B	2	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				179.000		
UNIT	126.50	120.50	1	B	2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				179.000		
UNIT	126.50	120.50	1	B	3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				179.000		
UNIT	126.50	120.50	1	B	2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				179.000		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				179.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	CHUNK		QUARTZITE				179.000		
UNIT	126.50	120.50	1	B	2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				179.000		
UNIT	126.50	120.50	1	B	1	HIST	OTHER	20TH CENTURY						179.000		Y
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				179.000		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	SECONDARY FLAKE	MED GRY	CHERT				179.000		
UNIT	126.50	120.50	1	B	3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				179.000		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				179.000		
UNIT	126.50	120.50	1	B	9	LITH	DEBITAGE	CHUNK		QUARTZITE				179.000		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				179.000		
UNIT	126.50	120.50	1	B	2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				179.000		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				179.000		
UNIT	126.50	120.50	1	B	8	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	70			179.000		Y
UNIT	126.50	120.50	1	B	2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	179.000		
UNIT	126.50	120.50	1	B	1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	179.000		
UNIT	126.50	120.50	1	B	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	179.001		
UNIT	126.50	120.50	1	B	1	CER	VESSEL	SAND & SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	179.002		
UNIT	126.50	120.50	1	B	1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	179.003		
UNIT	126.50	120.50	1	B	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	179.004		
UNIT	126.50	120.50	1	B	1	CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	179.005		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				179.006		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZITE				179.007		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				179.008		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				179.009		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				179.010		
UNIT	126.50	120.50	1	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				179.011		
UNIT	126.50	120.50	1	B	1	LITH	BIFACE	UNCLASSIFIABLE BIFACE	DRK YEL	CHERT		LATERAL		179.012		
UNIT	126.50	120.50	2	B	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				180.000		
UNIT	126.50	120.50	2	B	1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				180.000		
UNIT	126.50	120.50	2	B	1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				180.000		
UNIT	126.50	120.50	2	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				180.000		
UNIT	126.50	120.50	2	B	2	LITH	DEBITAGE	CHUNK		QUARTZ				180.000		
UNIT	126.50	120.50	2	B	1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				180.000		
UNIT	126.50	120.50	2	B	2	LITH	OTHER	FIRE-CRACKED ROCK		CHERT	2			180.000		Y
UNIT	126.50	120.50	2	B	2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	180.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	126.50	120.50	2 B	1 LITH	PEK/GRND	STONE BOWL		STEATITE		FRAG		180.001		
UNIT	126.50	120.50	2 B	1 CER	VESSEL	SAND & SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	180.002		
PPLOT	126.50	120.50	2 B	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	181.001	Artifact # 1	
PPLOT	126.50	120.50	2 B	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		RIM	UNDECOR	182.001	Artifact # 2	
PPLOT	126.50	120.50	2 B	1 LITH	DEBITAGE	CHUNK		QUARTZ				183.000	Artifact # 3	
UNIT	126.50	120.50	3 C	1 CER	VESSEL	(SHERDLET)		CORD-SURF			UNDECOR	184.000		
UNIT	126.50	120.50	3 C	3 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				184.000		
UNIT	126.50	120.50	3 C	2 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				184.000		
UNIT	126.50	120.50	3 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				184.000		
UNIT	126.50	120.50	3 C	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				184.000		
UNIT	126.50	120.50	3 C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				184.000		
UNIT	126.50	120.50	3 C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				184.000		
UNIT	126.50	120.50	3 C	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				184.000		
UNIT	126.50	120.50	3 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				184.000		
UNIT	126.50	120.50	3 C	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				184.000		
UNIT	126.50	120.50	3 C	4 LITH	DEBITAGE	CHUNK		QUARTZ				184.000		
UNIT	126.50	120.50	3 C	3 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	34			184.000		Y
UNIT	126.50	120.50	3 C	1 LITH	OTHER	UNMODIFIED		RED OCHRE				184.000		N
PPLOT	126.50	120.50	3 C	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	185.001	Artifact # 2	
PPLOT	126.50	120.50	3 C	5 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	139			186.000	FCR	Y
PPLOT	126.50	120.50	3 C	2 LITH	DEBITAGE	CHUNK		QUARTZ				186.000	FCR	
UNIT	126.50	120.50	4 C	1 LITH	DEBITAGE	CHUNK		CHERT				187.000		
UNIT	126.50	120.50	4 C	3 LITH	DEBITAGE	CHUNK		QUARTZ				187.000		
UNIT	126.50	120.50	4 C	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				187.000		
UNIT	126.50	120.50	4 C	3 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				187.000		
UNIT	126.50	120.50	4 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				187.000		
UNIT	126.50	120.50	4 C	1 LITH	BIFACE	EXPANDING-STEMMED POINT		QUARTZITE		BASE		187.001		
UNIT	126.50	120.50	5 D	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				188.000		
UNIT	126.50	120.50	5 D	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				188.000		
UNIT	126.50	120.50	5 D	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				188.000		
UNIT	126.50	120.50	5 D	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				188.000		
UNIT	126.50	120.50	5 D	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				188.000		
UNIT	126.50	120.50	6 D	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				189.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 130.00 / WEST 75.00													
UNIT	130.00	75.00	1 A	2 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				346.000		
UNIT	130.00	75.00	1 A	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	346.000		
UNIT	130.00	75.00	1 A	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				346.000		
UNIT	130.00	75.00	1 A	1 CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	346.001		
UNIT	130.00	75.00	2 B	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				347.000		
UNIT	130.00	75.00	2 B	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				347.000		
UNIT	130.00	75.00	2 B	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				347.000		
UNIT	130.00	75.00	2 B	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				347.000		
UNIT	130.00	75.00	2 B	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				347.000		
UNIT	130.00	75.00	2 B	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	10			347.000		Y
UNIT	130.00	75.00	2 B	1 LITH	DEBITAGE	DECORTICATION FLAKE	MOT GRY	CHERT				347.000		
UNIT	130.00	75.00	2 B	2 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				347.000		
UNIT	130.00	75.00	2 B	6 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				347.000		
UNIT	130.00	75.00	2 B	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				347.000		
UNIT	130.00	75.00	2 B	5 LITH	DEBITAGE	CHUNK		QUARTZ				347.000		
UNIT	130.00	75.00	3 C	3 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				348.000		
UNIT	130.00	75.00	3 C	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				348.000		
UNIT	130.00	75.00	3 C	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				348.000		
UNIT	130.00	75.00	3 C	3 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				348.000		
UNIT	130.00	75.00	3 C	4 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				348.000		
UNIT	130.00	75.00	3 C	4 LITH	DEBITAGE	CHUNK		QUARTZ				348.000		
UNIT	130.00	75.00	3 C	10 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				348.000		
UNIT	130.00	75.00	3 C	3 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				348.000		
UNIT	130.00	75.00	3 C	3 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				348.000		
UNIT	130.00	75.00	3 C	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				348.000		
UNIT	130.00	75.00	3 C	7 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				348.000		
UNIT	130.00	75.00	3 C	1 LITH	DEBITAGE	CHUNK		QUARTZITE				348.000		
UNIT	130.00	75.00	3 C	5 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				348.000		
UNIT	130.00	75.00	3 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				348.001		
PPLOT	130.00	75.00	3 C	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	349.001	Artifact # 1	
UNIT	130.00	75.00	4 C	9 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				350.000		
UNIT	130.00	75.00	4 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				350.000		
UNIT	130.00	75.00	4 C	4 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				350.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	130.00	75.00	4 C	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	94			350.000		Y
UNIT	130.00	75.00	4 C	1 LITH	DEBITAGE	CHUNK		QUARTZ				350.000		
UNIT	130.00	75.00	4 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				350.000		
UNIT	130.00	75.00	4 C	1 LITH	DEBITAGE	CHUNK		QUARTZITE				350.000		
UNIT	130.00	75.00	4 C	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				350.000		
UNIT	130.00	75.00	4 C	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				350.000		
UNIT	130.00	75.00	4 C	7 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				350.000		
UNIT	130.00	75.00	4 C	7 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				350.000		
**	NORTH 131.00 / WEST 70.00													
STP	131.00	70.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	19			166.000		Y
STP	131.00	70.00	0	2 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				166.000		
STP	131.00	70.00	0	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				166.000		
STP	131.00	70.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				166.000		
STP	131.00	70.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	166.001		
**	NORTH 131.00 / WEST 75.00													
STP	131.00	75.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				162.000		
STP	131.00	75.00	0	2 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				162.000		
STP	131.00	75.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				162.000		
STP	131.00	75.00	0	1 LITH	DEBITAGE	CHUNK		RHYOLITE				162.000		
STP	131.00	75.00	0	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				162.000		
STP	131.00	75.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				162.000		
STP	131.00	75.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				162.000		
STP	131.00	75.00	0	1 LITH	BIFACE	STRAIGHT-STEMMED POINT		QUARTZITE		WHOLE		162.001		
**	NORTH 131.00 / WEST 80.00													
STP	131.00	80.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	17			155.000		Y
STP	131.00	80.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				155.000		
STP	131.00	80.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE	BLACK/T	CHERT				155.000		
STP	131.00	80.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				155.000		
**	NORTH 131.00 / WEST 85.00													
STP	131.00	85.00	0	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	147.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	131.00	85.00	0		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				147.000		
**	NORTH 131.00 / WEST 90.00															
STP	131.00	90.00	0		1	HIST	BRICK							135.000		N
STP	131.00	90.00	0		2	LITH	DEBITAGE	CHUNK		QUARTZ				135.000		
STP	131.00	90.00	0		1	CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	135.001		
**	NORTH 131.00 / WEST 95.00															
STP	131.00	95.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	19			122.000		Y
STP	131.00	95.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				122.000		
STP	131.00	95.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				122.000		
STP	131.00	95.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				122.000		
STP	131.00	95.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				122.000		
**	NORTH 131.00 / WEST 100.00															
STP	131.00	100.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				108.000		
STP	131.00	100.00	0		2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				108.000		
STP	131.00	100.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	BLACK	CHERT				108.000		
STP	131.00	100.00	0		1	HIST	NAIL	19TH CENTURY						108.000		N
STP	131.00	100.00	0		1	LITH	OTHER	UNMODIFIED		RED OCHRE				108.000		N
STP	131.00	100.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				108.000		
STP	131.00	100.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				108.000		
STP	131.00	100.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				108.000		
STP	131.00	100.00	0		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				108.001		
STP	131.00	100.00	0		1	CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	108.002		
**	NORTH 131.00 / WEST 105.00															
STP	131.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				93.000		
STP	131.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				93.000		
STP	131.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				93.000		
STP	131.00	105.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				93.000		
STP	131.00	105.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				93.000		
STP	131.00	105.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				93.000		
STP	131.00	105.00	0		1	CER	VESSEL	UNDETERMINED		UNCLAS-SURF		BODY	UNDECOR	93.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 131.00 / WEST 110.00															
STP	131.00	110.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				78.000		
STP	131.00	110.00	0		6	LITH	DEBITAGE	CHUNK		QUARTZ				78.000		
STP	131.00	110.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE	MOT BRN	CHERT				78.000		
STP	131.00	110.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				78.000		
STP	131.00	110.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				78.000		
**	NORTH 131.00 / WEST 115.00															
STP	131.00	115.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				62.000		
STP	131.00	115.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				62.000		
STP	131.00	115.00	0		2	LITH	DEBITAGE	CHUNK		QUARTZ				62.000		
STP	131.00	115.00	0		3	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	190			62.000		Y
STP	131.00	115.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	62.001		
STP	131.00	115.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		FABRIC-SURF		BODY	UNDECOR	62.002		
**	NORTH 131.00 / WEST 120.00															
STP	131.00	120.00	0		5	LITH	DEBITAGE	CHUNK		QUARTZ				46.000		
STP	131.00	120.00	0		2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	46.000		
STP	131.00	120.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	1			46.000		Y
STP	131.00	120.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				46.000		
STP	131.00	120.00	0		1	LITH	BIFACE	STAGE 1 BIFACE		QUARTZ		BASE		46.001		
STP	131.00	120.00	0		1	LITH	DEBITAGE	BIPOLAR CORE	LT GRY	CHERT				46.002		
**	NORTH 132.00 / WEST 116.00															
UNIT	132.00	116.00	1	A	1	HIST	GLASS	20TH CENTURY						190.000		Y
UNIT	132.00	116.00	1	A	1	LITH	DEBITAGE	CHUNK		QUARTZITE				190.000		
UNIT	132.00	116.00	1	A	7	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	216			190.000		Y
UNIT	132.00	116.00	1	A	2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				190.000		
UNIT	132.00	116.00	1	A	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				190.000		
UNIT	132.00	116.00	1	A	1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				190.000		
UNIT	132.00	116.00	1	A	5	LITH	DEBITAGE	CHUNK		QUARTZ				190.000		
UNIT	132.00	116.00	1	A	1	HIST	OTHER	20TH CENTURY						190.000		Y
UNIT	132.00	116.00	1	A	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				190.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	132.00	116.00	1	A	5	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				190.000		
UNIT	132.00	116.00	1	A	1	LITH	DEBITAGE	SECONDARY FLAKE	DRK GRY	CHERT				190.000		
UNIT	132.00	116.00	1	A	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				190.000		
UNIT	132.00	116.00	1	A	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				190.000		
UNIT	132.00	116.00	1	A	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	190.001		
UNIT	132.00	116.00	1	A	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	190.002		
UNIT	132.00	116.00	1	A	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	190.003		
UNIT	132.00	116.00	1	A	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	190.004		
UNIT	132.00	116.00	1	A	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	190.005		
UNIT	132.00	116.00	1	A	1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	190.006		
UNIT	132.00	116.00	1	A	1	CER	VESSEL	QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	190.007		
UNIT	132.00	116.00	1	A	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	190.008		
UNIT	132.00	116.00	1	A	1	LITH	BIFACE	STRAIGHT-STEMMED POINT		RHYOLITE		BASE		190.009		
UNIT	132.00	116.00	1	A	1	LITH	BIFACE	TRIANGULAR POINT		QUARTZITE		BASE		190.010		
UNIT	132.00	116.00	2	B	1	HIST	GLASS	MODERN						191.000		Y
UNIT	132.00	116.00	2	B	5	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	191.000		
UNIT	132.00	116.00	2	B	13	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	116			191.000		Y
UNIT	132.00	116.00	2	B	3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				191.000		
UNIT	132.00	116.00	2	B	5	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				191.000		
UNIT	132.00	116.00	2	B	2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				191.000		
UNIT	132.00	116.00	2	B	1	LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				191.000		
UNIT	132.00	116.00	2	B	3	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	191.000		
UNIT	132.00	116.00	2	B	4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				191.000		
UNIT	132.00	116.00	2	B	2	LITH	OTHER	UNMODIFIED		QUARTZ				191.000		N
UNIT	132.00	116.00	2	B	80	LITH	DEBITAGE	CHUNK		QUARTZ				191.000		
UNIT	132.00	116.00	2	B	9	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				191.000		
UNIT	132.00	116.00	2	B	3	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				191.000		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	191.001		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	191.002		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	191.003		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	SAND-TEMPERED		NET-SURF		BODY	UNDECOR	191.004		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	191.005		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	191.006		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	191.007		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	132.00	116.00	2	B	1	CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	191.008		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	SAND & SHELL-TEMPERED		NET-SURF		BODY	UNDECOR	191.009		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	191.010		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	191.011		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	191.012		
UNIT	132.00	116.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	191.013		
UNIT	132.00	116.00	2	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZITE				191.014		
UNIT	132.00	116.00	2	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				191.015		
UNIT	132.00	116.00	2	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				191.016		
UNIT	132.00	116.00	2	B	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				191.017		
UNIT	132.00	116.00	3	C	10	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	156			192.000		Y
UNIT	132.00	116.00	3	C	7	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				192.000		
UNIT	132.00	116.00	3	C	2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				192.000		
UNIT	132.00	116.00	3	C	4	LITH	OTHER	UNMODIFIED		QUARTZ	92			192.000		Y
UNIT	132.00	116.00	3	C	2	LITH	DEBITAGE	CHUNK	BLACK	CHERT				192.000		
UNIT	132.00	116.00	3	C	3	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				192.000		
UNIT	132.00	116.00	3	C	3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				192.000		
UNIT	132.00	116.00	3	C	77	LITH	DEBITAGE	CHUNK		QUARTZ				192.000		
UNIT	132.00	116.00	3	C	1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				192.000		
UNIT	132.00	116.00	3	C	7	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				192.000		
UNIT	132.00	116.00	3	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				192.000		
UNIT	132.00	116.00	3	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				192.000		
UNIT	132.00	116.00	3	C	2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				192.000		
UNIT	132.00	116.00	3	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	192.001		
UNIT	132.00	116.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	192.002		
UNIT	132.00	116.00	3	C	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	192.003		
UNIT	132.00	116.00	3	C	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	192.003		
UNIT	132.00	116.00	3	C	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	192.004		
UNIT	132.00	116.00	3	C	1	LITH	USE-MODI	EDGE BATTERED HAMMERSTONE		SANDSTONE		WHOLE		192.005		
PPLOT	132.00	116.00	3	C	1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	193.000	Artifact # 1	
PPLOT	132.00	116.00	3	C	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BASE	UNDECOR	193.001	Artifact # 1	
PPLOT	132.00	116.00	3	C	1	CER	VESSEL	SAND & SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	193.002	Artifact # 1	
PPLOT	132.00	116.00	3	C	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	194.001	Artifact # 2	
PPLOT	132.00	116.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	195.001	Artifact # 3	

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	132.00	116.00	3	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				196.001	Artifact # 4	
PPLOT	132.00	116.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		NET-SURF		BODY	UNDECOR	197.001	Artifact # 5	
PPLOT	132.00	116.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	198.001	Artifact # 6	
PPLOT	132.00	116.00	3	C	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	199.001	Artifact # 7	
UNIT	132.00	116.00	4	C	4	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				200.000		
UNIT	132.00	116.00	4	C	1	LITH	OTHER	UNMODIFIED		QUARTZ	56			200.000		Y
UNIT	132.00	116.00	4	C	6	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				200.000		
UNIT	132.00	116.00	4	C	1	FAUN	BONE	UNDETERMINED				FRAG	BURNED	200.000		
UNIT	132.00	116.00	4	C	2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				200.000		
UNIT	132.00	116.00	4	C	4	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	35			200.000		Y
UNIT	132.00	116.00	4	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				200.000		
UNIT	132.00	116.00	4	C	5	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				200.000		
UNIT	132.00	116.00	4	C	2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				200.000		
UNIT	132.00	116.00	4	C	7	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				200.000		
UNIT	132.00	116.00	4	C	30	LITH	DEBITAGE	CHUNK		QUARTZ				200.000		
UNIT	132.00	116.00	4	C	1	LITH	DEBITAGE	CHUNK		RHYOLITE				200.000		
UNIT	132.00	116.00	4	C	1	LITH	DEBITAGE	CHUNK	BLACK	CHERT				200.000		
UNIT	132.00	116.00	4	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				200.001		
UNIT	132.00	116.00	4	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				200.002		
UNIT	132.00	116.00	5	C	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				201.000		
UNIT	132.00	116.00	5	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				201.000		
UNIT	132.00	116.00	5	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				201.000		
UNIT	132.00	116.00	5	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				201.000		
UNIT	132.00	116.00	5	C	1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	28			201.000		Y
UNIT	132.00	116.00	5	C	14	LITH	DEBITAGE	CHUNK		QUARTZ				201.000		
UNIT	132.00	116.00	6	D	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				202.000		
UNIT	132.00	116.00	6	D	1	LITH	DEBITAGE	CHUNK		QUARTZ				202.000		
UNIT	132.00	116.00	6	D	1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	1			202.000		Y
UNIT	132.00	116.00	6	D	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				202.000		
UNIT	132.00	116.00	6	D	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				202.000		
UNIT	132.00	116.00	6	D	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				202.000		
**	NORTH	135.00 /	WEST	95.00												
UNIT	135.00	95.00	1	A	1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	331.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	135.00	95.00	1	A	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				331.000		
UNIT	135.00	95.00	1	A	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				331.000		
UNIT	135.00	95.00	1	A	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				331.000		
UNIT	135.00	95.00	1	A	1	HIST	OTHER	MODERN						331.000		Y
UNIT	135.00	95.00	1	A	3	LITH	DEBITAGE	CHUNK		QUARTZ				331.000		
UNIT	135.00	95.00	1	A	1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				331.000		
UNIT	135.00	95.00	1	A	1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	331.001		
UNIT	135.00	95.00	1	A	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	331.002		
UNIT	135.00	95.00	2	B	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				332.000		
UNIT	135.00	95.00	2	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				332.000		
UNIT	135.00	95.00	2	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				332.000		
UNIT	135.00	95.00	2	B	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				332.000		
UNIT	135.00	95.00	2	B	2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	332.000		
UNIT	135.00	95.00	2	B	2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				332.000		
UNIT	135.00	95.00	2	B	2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				332.000		
UNIT	135.00	95.00	2	B	5	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				332.000		
UNIT	135.00	95.00	2	B	1	HIST	OTHER	MODERN						332.000		Y
UNIT	135.00	95.00	2	B	1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				332.000		
UNIT	135.00	95.00	2	B	2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				332.000		
UNIT	135.00	95.00	2	B	3	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	13			332.000		Y
UNIT	135.00	95.00	2	B	2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				332.000		
UNIT	135.00	95.00	2	B	3	LITH	DEBITAGE	CHUNK		QUARTZ				332.000		
UNIT	135.00	95.00	2	B	5	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				332.000		
UNIT	135.00	95.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	332.001		
UNIT	135.00	95.00	2	B	1	CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	332.002		
UNIT	135.00	95.00	2	B	1	LITH	BIFACE	SIDE-NOTCHED POINT		QUARTZ		WHOLE		332.003		
UNIT	135.00	95.00	3	C	1	LITH	DEBITAGE	CHUNK		QUARTZITE				333.000		
UNIT	135.00	95.00	3	C	9	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				333.000		
UNIT	135.00	95.00	3	C	3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				333.000		
UNIT	135.00	95.00	3	C	6	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				333.000		
UNIT	135.00	95.00	3	C	21	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				333.000		
UNIT	135.00	95.00	3	C	4	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	41			333.000		Y
UNIT	135.00	95.00	3	C	2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				333.000		
UNIT	135.00	95.00	3	C	16	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				333.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	135.00	95.00	3	C	3	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				333.000		
UNIT	135.00	95.00	3	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				333.000		
UNIT	135.00	95.00	3	C	1	FAUN	BONE	UNDETERMINED				FRAG	BURNED	333.000		
UNIT	135.00	95.00	3	C	14	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				333.000		
UNIT	135.00	95.00	3	C	1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				333.000		
UNIT	135.00	95.00	3	C	5	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				333.000		
UNIT	135.00	95.00	3	C	1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	333.000		
UNIT	135.00	95.00	3	C	1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		LATERAL		333.001		
UNIT	135.00	95.00	3	C	1	LITH	UNIFACE	RETOUCHED BIPOLAR FLAKE		QUARTZ		WHOLE		333.002		
PPLOT	135.00	95.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	335.001	Artifact # 2	
PPLOT	135.00	95.00	3	C	1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	52			336.000	Artifact # 3	Y
PPLOT	135.00	95.00	3	C	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	337.001	Artifact # 4	
PPLOT	135.00	95.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	338.001	Artifact # 5	
UNIT	135.00	95.00	4	C	5	LITH	DEBITAGE	CHUNK		QUARTZ				339.000		
UNIT	135.00	95.00	4	C	1	LITH	DEBITAGE	CHUNK		QUARTZITE				339.000		
UNIT	135.00	95.00	4	C	3	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				339.000		
UNIT	135.00	95.00	4	C	15	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				339.000		
UNIT	135.00	95.00	4	C	2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				339.000		
UNIT	135.00	95.00	4	C	6	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				339.000		
UNIT	135.00	95.00	4	C	13	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				339.000		
UNIT	135.00	95.00	4	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				339.000		
UNIT	135.00	95.00	4	C	2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				339.000		
UNIT	135.00	95.00	4	C	2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	339.000		
UNIT	135.00	95.00	4	C	12	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				339.000		
UNIT	135.00	95.00	4	C	1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				339.000		
UNIT	135.00	95.00	4	C	5	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				339.000		
UNIT	135.00	95.00	4	C	3	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	12			339.000		Y
UNIT	135.00	95.00	4	C	1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		BASE		339.001		
PPLOT	135.00	95.00	4	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				340.000	Artifact # 1	
PPLOT	135.00	95.00	4	C	1	LITH	DEBITAGE	CHUNK		QUARTZ				341.000	Artifact # 2	
PPLOT	135.00	95.00	4	C	1	LITH	DEBITAGE	CHUNK		RHYOLITE				342.000	Artifact # 3	
PPLOT	135.00	95.00	4	C	8	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	328			343.000	FCR	Y
UNIT	135.00	95.00	5	C	1	LITH	DEBITAGE	CHUNK		QUARTZ				344.000		
UNIT	135.00	95.00	5	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				344.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	135.00	95.00	5	C	2	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	4			344.000		Y
UNIT	135.00	95.00	5	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				344.000		
UNIT	135.00	95.00	5	C	5	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				344.000		
UNIT	135.00	95.00	5	C	3	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				344.000		
UNIT	135.00	95.00	5	C	6	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				344.000		
UNIT	135.00	95.00	5	C	1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				344.000		
UNIT	135.00	95.00	5	C	8	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				344.000		
UNIT	135.00	95.00	5	C	2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				344.000		
UNIT	135.00	95.00	5	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				344.000		
UNIT	135.00	95.00	6	C	1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				345.000		
UNIT	135.00	95.00	6	C	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				345.000		
UNIT	135.00	95.00	6	C	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				345.000		
UNIT	135.00	95.00	6	C	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				345.000		
**	NORTH 136.00 / WEST 70.00															
STP	136.00	70.00	0		6	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				165.000		
STP	136.00	70.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				165.000		
STP	136.00	70.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				165.000		
**	NORTH 136.00 / WEST 75.00															
STP	136.00	75.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				161.000		
STP	136.00	75.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				161.000		
STP	136.00	75.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	1			161.000		Y
STP	136.00	75.00	0		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				161.000		
**	NORTH 136.00 / WEST 80.00															
STP	136.00	80.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	1			154.000		Y
STP	136.00	80.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	154.000		
STP	136.00	80.00	0		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				154.000		
STP	136.00	80.00	0		1	LITH	DEBITAGE	CHUNK	BLACK	CHERT				154.000		
STP	136.00	80.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				154.000		
STP	136.00	80.00	0		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	154.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 136.00 / WEST 85.00															
STP	136.00	85.00	0		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				146.000		
STP	136.00	85.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	1			146.000		Y
STP	136.00	85.00	0		2	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	146.000		
STP	136.00	85.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				146.000		
STP	136.00	85.00	0		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	146.001		
STP	136.00	85.00	0		1	CER	VESSEL	SHELL-TEMPERED		NET-SURF		RIM	UNDECOR	146.002		
STP	136.00	85.00	0		1	CER	VESSEL	SHELL-TEMPERED		NET-SURF		BODY	UNDECOR	146.003		
STP	136.00	85.00	0		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				146.004		
STP	136.00	85.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				146.005		
**	NORTH 136.00 / WEST 90.00															
STP	136.00	90.00	0		3	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				134.000		
STP	136.00	90.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE	BAN YEL	CHERT				134.000		
STP	136.00	90.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				134.000		
STP	136.00	90.00	0		1	LITH	UNIFACE	OTHER UNIFACE	MED BRN	CHERT		WHOLE		134.001		
STP	136.00	90.00	0		1	LITH	UNIFACE	RETOUCHED PRIMARY FLAKE	DRK YEL	CHERT		FRAG		134.002		
**	NORTH 136.00 / WEST 95.00															
STP	136.00	95.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE	BLACK	CHERT				121.000		
STP	136.00	95.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	24			121.000		Y
STP	136.00	95.00	0		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				121.000		
STP	136.00	95.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				121.000		
STP	136.00	95.00	0		4	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				121.000		
STP	136.00	95.00	0		3	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				121.000		
STP	136.00	95.00	0		4	LITH	DEBITAGE	CHUNK		QUARTZ				121.000		
STP	136.00	95.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				121.000		
STP	136.00	95.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				121.000		
STP	136.00	95.00	0		7	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				121.000		
STP	136.00	95.00	0		8	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				121.000		
STP	136.00	95.00	0		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				121.001		
**	NORTH 136.00 / WEST 100.00															
STP	136.00	100.00	0		2	FAUN	BONE	UNDETERMINED				FRAG	UNBURNED	107.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	136.00	100.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				107.000		
STP	136.00	100.00	0	3 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	15			107.000		Y
STP	136.00	100.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				107.000		
STP	136.00	100.00	0	2 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				107.000		
STP	136.00	100.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				107.000		
STP	136.00	100.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				107.000		
STP	136.00	100.00	0	4 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				107.000		
STP	136.00	100.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				107.000		
STP	136.00	100.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				107.000		
STP	136.00	100.00	0	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZITE				107.001		
STP	136.00	100.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	107.002		
STP	136.00	100.00	0	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				107.003		
STP	136.00	100.00	0	1 LITH	UNIFACE	RETOUCHED CORE		QUARTZ		WHOLE		107.004		
**	NORTH 136.00 / WEST 105.00													
STP	136.00	105.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				92.000		
STP	136.00	105.00	0	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	35			92.000		Y
STP	136.00	105.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				92.000		
STP	136.00	105.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				92.000		
STP	136.00	105.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				92.000		
STP	136.00	105.00	0	1 LITH	BIFACE	LANCEOLATE POINT		QUARTZ		WHOLE		92.001		
**	NORTH 136.00 / WEST 110.00													
STP	136.00	110.00	0	1 HIST	NAIL	19TH CENTURY						77.000		N
STP	136.00	110.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				77.000		
STP	136.00	110.00	0	4 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	102			77.000		Y
STP	136.00	110.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				77.000		
STP	136.00	110.00	0	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	77.001		
**	NORTH 136.00 / WEST 115.00													
STP	136.00	115.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				61.000		
STP	136.00	115.00	0	2 LITH	DEBITAGE	CHUNK		QUARTZ				61.000		
STP	136.00	115.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	9			61.000		Y
STP	136.00	115.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				61.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	136.00	115.00	0	1 LITH	UNIFACE	RETOUCHED BIPOLAR FLAKE		QUARTZ		WHOLE		61.001		
STP	136.00	115.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	61.002		
**	NORTH 136.00 / WEST 120.00													
STP	136.00	120.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE	BLACK/T	CHERT				45.000		
STP	136.00	120.00	0	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	3			45.000		Y
STP	136.00	120.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				45.000		
**	NORTH 137.00 / WEST 101.00													
UNIT	137.00	101.00	1 A	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				316.000		
UNIT	137.00	101.00	1 A	1 HIST	OTHER	MODERN						316.000		Y
UNIT	137.00	101.00	1 A	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				316.001		
UNIT	137.00	101.00	2 B	2 LITH	DEBITAGE	CHUNK		QUARTZ				317.000		
UNIT	137.00	101.00	2 B	1 HIST	OTHER	MODERN						317.000		Y
UNIT	137.00	101.00	2 B	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	11			317.000		Y
UNIT	137.00	101.00	2 B	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				317.000		
UNIT	137.00	101.00	2 B	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				317.000		
UNIT	137.00	101.00	2 B	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				317.000		
UNIT	137.00	101.00	2 B	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				317.000		
UNIT	137.00	101.00	2 B	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	317.000		
UNIT	137.00	101.00	2 B	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BASE	UNDECOR	317.001		
UNIT	137.00	101.00	2 B	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	317.002		
UNIT	137.00	101.00	2 B	1 CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	317.003		
UNIT	137.00	101.00	2 B	1 CER	VESSEL	SAND-TEMPERED		NET-SURF		BODY	UNDECOR	317.004		
UNIT	137.00	101.00	2 B	1 CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	317.005		
UNIT	137.00	101.00	3 B	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	36			318.000		Y
UNIT	137.00	101.00	3 B	1 LITH	DEBITAGE	CHUNK		QUARTZ				318.000		
UNIT	137.00	101.00	3 B	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				318.000		
UNIT	137.00	101.00	3 B	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				318.000		
UNIT	137.00	101.00	3 B	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				318.000		
UNIT	137.00	101.00	3 B	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				318.000		
UNIT	137.00	101.00	3 B	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				318.000		
UNIT	137.00	101.00	3 B	1 HIST	OTHER	MODERN						318.000		Y
UNIT	137.00	101.00	3 B	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	318.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	137.00	101.00	3 B	1 CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	318.002		
UNIT	137.00	101.00	3 B	1 LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZ				318.003		
UNIT	137.00	101.00	4 C	8 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				319.000		
UNIT	137.00	101.00	4 C	6 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				319.000		
UNIT	137.00	101.00	4 C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				319.000		
UNIT	137.00	101.00	4 C	6 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	105			319.000		Y
UNIT	137.00	101.00	4 C	2 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				319.000		
UNIT	137.00	101.00	4 C	4 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				319.000		
UNIT	137.00	101.00	4 C	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				319.000		
UNIT	137.00	101.00	4 C	1 LITH	DEBITAGE	DECORTICATION FLAKE	LT GRN	CHERT				319.000		
UNIT	137.00	101.00	4 C	5 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				319.000		
UNIT	137.00	101.00	4 C	1 HIST	NAIL	UNDETERMINED						319.000		N
UNIT	137.00	101.00	4 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				319.001		
UNIT	137.00	101.00	4 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				319.002		
UNIT	137.00	101.00	4 C	1 LITH	UNIFACE	GRAVER		QUARTZ		WHOLE		319.003		
PPLOT	137.00	101.00	4 C	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	320.001	Artifact # 1	
PPLOT	137.00	101.00	4 C	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		RIM	UNDECOR	321.001	Artifact # 2	
UNIT	137.00	101.00	5 C	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				322.000		
UNIT	137.00	101.00	5 C	3 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	23			322.000		Y
UNIT	137.00	101.00	5 C	6 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				322.000		
UNIT	137.00	101.00	5 C	4 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				322.000		
UNIT	137.00	101.00	5 C	3 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				322.000		
UNIT	137.00	101.00	5 C	2 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				322.000		
UNIT	137.00	101.00	5 C	3 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				322.000		
UNIT	137.00	101.00	5 C	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				322.000		
UNIT	137.00	101.00	5 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				322.001		
UNIT	137.00	101.00	5 C	1 LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZ				322.002		
PPLOT	137.00	101.00	5 C	1 LITH	BIFACE	STAGE 2 BIFACE		QUARTZ		FRAG		323.001	Artifact # 1	
PPLOT	137.00	101.00	5 C	1 LITH	BIFACE	STAGE 1 BIFACE		RHYOLITE		FRAG		324.001	Artifact # 2	
PPLOT	137.00	101.00	5 C	1 LITH	DEBITAGE	CHUNK		QUARTZITE				325.000	Artifact # 3	
UNIT	137.00	101.00	6 C	3 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				326.000		
UNIT	137.00	101.00	6 C	3 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				326.000		
UNIT	137.00	101.00	6 C	3 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				326.000		
UNIT	137.00	101.00	6 C	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				326.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	137.00	101.00	6	C	3	LITH	DEBITAGE	CHUNK		QUARTZ				326.000		
UNIT	137.00	101.00	6	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				326.000		
UNIT	137.00	101.00	6	C	3	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				326.000		
UNIT	137.00	101.00	6	C	5	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				326.000		
PPLOT	137.00	101.00	6	C	1	LITH	BIFACE	SIDE-NOTCHED POINT		QUARTZ		LATERAL		327.001	Artifact # 1	
PPLOT	137.00	101.00	6	C	1	LITH	UNIFACE	RETOUCHED PRIMARY FLAKE		RHYOLITE		WHOLE		328.001	Artifact # 2	
UNIT	137.00	101.00	7	C	2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				329.000		
UNIT	137.00	101.00	7	C	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				329.000		
UNIT	137.00	101.00	7	C	2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				329.000		
UNIT	137.00	101.00	7	C	1	LITH	DEBITAGE	CHUNK		QUARTZ				329.000		
UNIT	137.00	101.00	7	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				329.001		
UNIT	137.00	101.00	8	D	1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				330.000		
UNIT	137.00	101.00	8	D	1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				330.000		
UNIT	137.00	101.00	8	D	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				330.000		
**	NORTH	141.00 / WEST	80.00													
STP	141.00	80.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				153.000		
STP	141.00	80.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				153.000		
STP	141.00	80.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				153.000		
STP	141.00	80.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				153.000		
STP	141.00	80.00	0		1	LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZ				153.001		
**	NORTH	141.00 / WEST	85.00													
STP	141.00	85.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				145.000		
STP	141.00	85.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE	DRK RED	CHERT				145.000		
STP	141.00	85.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				145.000		
STP	141.00	85.00	0		1	CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	145.001		
STP	141.00	85.00	0		1	CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	145.002		
STP	141.00	85.00	0		1	CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	145.003		
**	NORTH	141.00 / WEST	90.00													
STP	141.00	90.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				133.000		
STP	141.00	90.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				133.000		
STP	141.00	90.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				133.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 141.00 / WEST 95.00															
STP	141.00	95.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE	DRK YEL	CHERT				120.000		
STP	141.00	95.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				120.000		
STP	141.00	95.00	0		2	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	6			120.000		Y
STP	141.00	95.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				120.000		
STP	141.00	95.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	120.001		
STP	141.00	95.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	120.002		
STP	141.00	95.00	0		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	120.003		
STP	141.00	95.00	0		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	120.004		
**	NORTH 141.00 / WEST 100.00															
STP	141.00	100.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	106.000		
STP	141.00	100.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	106.000		
STP	141.00	100.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				106.000		
STP	141.00	100.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				106.000		
STP	141.00	100.00	0		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				106.000		
**	NORTH 141.00 / WEST 105.00															
STP	141.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK BRN	CHERT				91.000		
STP	141.00	105.00	0		2	LITH	DEBITAGE	TERTIARY FLAKE	LT GRN	CHERT				91.000		
STP	141.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	LT GRN	CHERT				91.000		
STP	141.00	105.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				91.000		
STP	141.00	105.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				91.000		
**	NORTH 141.00 / WEST 110.00															
STP	141.00	110.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				76.000		
STP	141.00	110.00	0		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				76.000		
STP	141.00	110.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				76.000		
STP	141.00	110.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				76.000		
STP	141.00	110.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	18			76.000		Y
**	NORTH 141.00 / WEST 115.00															
STP	141.00	115.00	0		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				60.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	141.00	115.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				60.000		
STP	141.00	115.00	0	6 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				60.000		
STP	141.00	115.00	0	7 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				60.000		
STP	141.00	115.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				60.000		
STP	141.00	115.00	0	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	26			60.000		Y
STP	141.00	115.00	0	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				60.000		
STP	141.00	115.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				60.000		
STP	141.00	115.00	0	1 LITH	DEBITAGE	CHUNK	LT GRY	CHERT			HEAT DAMMG	60.000		
STP	141.00	115.00	0	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				60.001		
**	NORTH 141.00 / WEST 135.00													
STP	141.00	135.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				30.000		
**	NORTH 141.00 / WEST 140.00													
STP	141.00	140.00	0	1 HIST	CERAMIC	UNDETERMINED						22.000		N
STP	141.00	140.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		SMOOTH-SURF		BASE	UNDECOR	22.001		
**	NORTH 142.00 / WEST 115.00													
UNIT	142.00	115.00	1 A	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				225.000		
UNIT	142.00	115.00	1 A	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				225.000		
UNIT	142.00	115.00	1 A	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				225.000		
UNIT	142.00	115.00	1 A	10 LITH	DEBITAGE	CHUNK		QUARTZ				225.000		
UNIT	142.00	115.00	1 A	1 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	8			225.000		Y
UNIT	142.00	115.00	1 A	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				225.000		
UNIT	142.00	115.00	1 A	1 HIST	OTHER	MODERN						225.000		Y
UNIT	142.00	115.00	1 A	1 LITH	OTHER	UNMODIFIED		LIMESTONE	2			225.000		Y
UNIT	142.00	115.00	1 A	1 CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	225.001		
UNIT	142.00	115.00	1 A	1 CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	225.002		
UNIT	142.00	115.00	1 A	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	225.003		
UNIT	142.00	115.00	1 A	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				225.004		
UNIT	142.00	115.00	2 B	2 LITH	DEBITAGE	CHUNK	DRK RED	CHERT			HEAT DAMMG	226.000		
UNIT	142.00	115.00	2 B	1 HIST	GLASS	UNDETERMINED						226.000		N
UNIT	142.00	115.00	2 B	1 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	226.000		
UNIT	142.00	115.00	2 B	4 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				226.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	142.00	115.00	2 B	4 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				226.000		
UNIT	142.00	115.00	2 B	4 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				226.000		
UNIT	142.00	115.00	2 B	4 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	19			226.000		Y
UNIT	142.00	115.00	2 B	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				226.000		
UNIT	142.00	115.00	2 B	5 LITH	OTHER	UNMODIFIED		QUARTZ	21			226.000		Y
UNIT	142.00	115.00	2 B	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				226.000		
UNIT	142.00	115.00	2 B	4 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				226.000		
UNIT	142.00	115.00	2 B	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				226.000		
UNIT	142.00	115.00	2 B	3 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				226.000		
UNIT	142.00	115.00	2 B	32 LITH	DEBITAGE	CHUNK		QUARTZ				226.000		
UNIT	142.00	115.00	2 B	1 CER	VESSEL	SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	226.001		
UNIT	142.00	115.00	2 B	1 CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	226.002		
UNIT	142.00	115.00	2 B	1 CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	226.003		
UNIT	142.00	115.00	2 B	1 LITH	UNIFACE	RETOUCHED DECORTICATN FLAKE		QUARTZ		WHOLE		226.004		
UNIT	142.00	115.00	3 C	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				227.000		
UNIT	142.00	115.00	3 C	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				227.000		
UNIT	142.00	115.00	3 C	19 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				227.000		
UNIT	142.00	115.00	3 C	80 LITH	OTHER	UNMODIFIED		QUARTZ	999			227.000		Y
UNIT	142.00	115.00	3 C	2 LITH	DEBITAGE	CHUNK		QUARTZITE				227.000		
UNIT	142.00	115.00	3 C	2 LITH	DEBITAGE	CHUNK	DRK RED	CHERT			HEAT DAMMG	227.000		
UNIT	142.00	115.00	3 C	3 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				227.000		
UNIT	142.00	115.00	3 C	1 LITH	DEBITAGE	CHUNK	LT GRY	CHERT			HEAT DAMMG	227.000		
UNIT	142.00	115.00	3 C	1 LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				227.000		
UNIT	142.00	115.00	3 C	1 LITH	DEBITAGE	CHUNK	BLACK	CHERT				227.000		
UNIT	142.00	115.00	3 C	2 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				227.000		
UNIT	142.00	115.00	3 C	168 LITH	DEBITAGE	CHUNK		QUARTZ				227.000		
UNIT	142.00	115.00	3 C	2 LITH	DEBITAGE	CHUNK	DRK GRY	CHERT				227.000		
UNIT	142.00	115.00	3 C	4 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				227.000		
UNIT	142.00	115.00	3 C	4 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				227.000		
UNIT	142.00	115.00	3 C	1 LITH	DEBITAGE	SECONDARY FLAKE	LT GRY	CHERT			HEAT DAMMG	227.000		
UNIT	142.00	115.00	3 C	12 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	337			227.000		Y
UNIT	142.00	115.00	3 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				227.001		
UNIT	142.00	115.00	3 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				227.002		
UNIT	142.00	115.00	3 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				227.003		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	142.00	115.00	3	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				227.004		
UNIT	142.00	115.00	3	C	1	LITH	OTHER	UNMODIFIED		SANDSTONE				227.005		
PPLOT	142.00	115.00	3	C	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	228.001	Artifact # 1	
UNIT	142.00	115.00	4	C	6	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				230.000		
UNIT	142.00	115.00	4	C	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				230.000		
UNIT	142.00	115.00	4	C	1	LITH	DEBITAGE	CHUNK	CRM/WHT	CHERT				230.000		
UNIT	142.00	115.00	4	C	166	LITH	DEBITAGE	CHUNK		QUARTZ				230.000		
UNIT	142.00	115.00	4	C	1	LITH	DEBITAGE	CHUNK	BLACK	CHERT				230.000		
UNIT	142.00	115.00	4	C	2	LITH	OTHER	UNMODIFIED		SANDSTONE	26			230.000		Y
UNIT	142.00	115.00	4	C	4	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	57			230.000		Y
UNIT	142.00	115.00	4	C	2	LITH	OTHER	UNMODIFIED		QUARTZITE	61			230.000		Y
UNIT	142.00	115.00	4	C	5	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				230.000		
UNIT	142.00	115.00	4	C	4	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				230.000		
UNIT	142.00	115.00	4	C	2	LITH	OTHER	UNMODIFIED		CHERT	52			230.000		Y
UNIT	142.00	115.00	4	C	81	LITH	OTHER	UNMODIFIED		QUARTZ	999			230.000		Y
UNIT	142.00	115.00	4	C	2	LITH	DEBITAGE	CHUNK	DRK GRY	CHERT				230.000		
UNIT	142.00	115.00	4	C	1	LITH	DEBITAGE	CHUNK	MED BRN	CHERT				230.000		
UNIT	142.00	115.00	4	C	4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				230.000		
UNIT	142.00	115.00	4	C	2	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE	DRK RED	CHERT			HEAT DAMMG	230.000		
UNIT	142.00	115.00	4	C	27	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				230.000		
UNIT	142.00	115.00	4	C	3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				230.000		
UNIT	142.00	115.00	4	C	1	LITH	OTHER	UNMODIFIED		SANDSTONE				230.001		
UNIT	142.00	115.00	4	C	1	LITH	OTHER	UNMODIFIED		SANDSTONE				230.002		
UNIT	142.00	115.00	4	C	1	LITH	OTHER	UNMODIFIED		SANDSTONE				230.003		
UNIT	142.00	115.00	4	C	1	LITH	OTHER	UNMODIFIED		SANDSTONE				230.004		
UNIT	142.00	115.00	4	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				230.005		
UNIT	142.00	115.00	4	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				230.006		
UNIT	142.00	115.00	4	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				230.007		
UNIT	142.00	115.00	4	C	1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				230.008		
UNIT	142.00	115.00	5	C	3	LITH	DEBITAGE	CHUNK	BLACK	CHERT			HEAT DAMMG	231.000		
UNIT	142.00	115.00	5	C	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				231.000		
UNIT	142.00	115.00	5	C	1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				231.000		
UNIT	142.00	115.00	5	C	6	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				231.000		
UNIT	142.00	115.00	5	C	104	LITH	DEBITAGE	CHUNK		QUARTZ				231.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	142.00	115.00	5 C	3 LITH	DEBITAGE	CHUNK	MED GRY	CHERT			HEAT DAMMG	231.000		
UNIT	142.00	115.00	5 C	3 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				231.000		
UNIT	142.00	115.00	5 C	33 LITH	OTHER	UNMODIFIED		QUARTZ	569			231.000		Y
UNIT	142.00	115.00	5 C	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				231.000		
UNIT	142.00	115.00	5 C	3 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	16			231.000		Y
UNIT	142.00	115.00	5 C	3 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				231.000		
UNIT	142.00	115.00	5 C	1 LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZ				231.001		
UNIT	142.00	115.00	5 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				231.002		
UNIT	142.00	115.00	5 C	1 LITH	OTHER	UNMODIFIED		SANDSTONE				231.003		
UNIT	142.00	115.00	5 C	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZITE		BASE		231.004		
UNIT	142.00	115.00	6 C	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				232.000		
UNIT	142.00	115.00	6 C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				232.000		
UNIT	142.00	115.00	6 C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				232.000		
UNIT	142.00	115.00	6 C	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				232.000		
UNIT	142.00	115.00	6 C	2 LITH	OTHER	UNMODIFIED		QUARTZITE	53			232.000		Y
UNIT	142.00	115.00	6 C	7 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				232.000		
UNIT	142.00	115.00	6 C	2 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		RHYOLITE				232.000		
UNIT	142.00	115.00	6 C	41 LITH	DEBITAGE	CHUNK		QUARTZ				232.000		
UNIT	142.00	115.00	6 C	8 LITH	OTHER	UNMODIFIED		QUARTZ	157			232.000		Y
UNIT	142.00	115.00	6 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				232.001		
UNIT	142.00	115.00	7 C	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				233.000		
UNIT	142.00	115.00	7 C	12 LITH	DEBITAGE	CHUNK		QUARTZ				233.000		
UNIT	142.00	115.00	7 C	2 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	8			233.000		Y
UNIT	142.00	115.00	7 C	7 LITH	OTHER	UNMODIFIED		QUARTZ	103			233.000		Y
UNIT	142.00	115.00	7 C	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				233.000		
UNIT	142.00	115.00	7 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				233.000		
UNIT	142.00	115.00	7 C	1 LITH	USE-MODI	EDGE BATTERED HAMMERSTONE		SANDSTONE		WHOLE		233.001		
UNIT	142.00	115.00	8 C	1 LITH	OTHER	UNMODIFIED		QUARTZ	4			234.000		Y
UNIT	142.00	115.00	8 C	1 LITH	DEBITAGE	CHUNK	DRK RED	CHERT			HEAT DAMMG	234.000		
UNIT	142.00	115.00	8 C	3 LITH	DEBITAGE	CHUNK		QUARTZ				234.000		
**	NORTH 146.00 / WEST 90.00													
STP	146.00	90.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				132.000		
STP	146.00	90.00	0	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				132.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	146.00	90.00	0		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	132.001		
**	NORTH 146.00 / WEST 95.00															
STP	146.00	95.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				119.000		
STP	146.00	95.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				119.000		
STP	146.00	95.00	0		1	CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	119.001		
**	NORTH 146.00 / WEST 100.00															
STP	146.00	100.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				105.000		
STP	146.00	100.00	0		2	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				105.000		
STP	146.00	100.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				105.000		
STP	146.00	100.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				105.000		
STP	146.00	100.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				105.000		
STP	146.00	100.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK RED	CHERT				105.000		
STP	146.00	100.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		SILTSTONE				105.000		
**	NORTH 146.00 / WEST 105.00															
STP	146.00	105.00	0		1	CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	90.001		
**	NORTH 146.00 / WEST 110.00															
STP	146.00	110.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				75.000		
STP	146.00	110.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				75.000		
STP	146.00	110.00	0		2	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	18			75.000		Y
STP	146.00	110.00	0		1	LITH	BIFACE	SIDE-NOTCHED POINT		QUARTZ		WHOLE		75.001		
**	NORTH 146.00 / WEST 115.00															
STP	146.00	115.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				59.000		
STP	146.00	115.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE	DRK YEL	CHERT				59.000		
STP	146.00	115.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				59.000		
**	NORTH 146.00 / WEST 120.00															
STP	146.00	120.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	3			44.000		Y
STP	146.00	120.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	44.000		
STP	146.00	120.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				44.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	146.00	120.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				44.000		
STP	146.00	120.00	0		1	CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	44.001		
**	NORTH 146.00 / WEST 135.00															
STP	146.00	135.00	0		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				29.000		
STP	146.00	135.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE	DRK YEL	CHERT				29.000		
STP	146.00	135.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				29.000		
STP	146.00	135.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				29.000		
**	NORTH 146.00 / WEST 140.00															
STP	146.00	140.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				21.000		
STP	146.00	140.00	0		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	21.001		
**	NORTH 151.00 / WEST 100.00															
STP	151.00	100.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				104.000		
STP	151.00	100.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				104.000		
STP	151.00	100.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	11			104.000		Y
STP	151.00	100.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				104.000		
**	NORTH 151.00 / WEST 105.00															
STP	151.00	105.00	0		2	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				89.000		
STP	151.00	105.00	0		3	LITH	DEBITAGE	CHUNK		QUARTZ				89.000		
STP	151.00	105.00	0		2	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	18			89.000		Y
STP	151.00	105.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				89.000		
STP	151.00	105.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				89.000		
STP	151.00	105.00	0		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				89.000		
STP	151.00	105.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				89.000		
**	NORTH 151.00 / WEST 110.00															
STP	151.00	110.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				74.000		
STP	151.00	110.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				74.000		
STP	151.00	110.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				74.000		
STP	151.00	110.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				74.000		
STP	151.00	110.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				74.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 151.00 / WEST 115.00															
STP	151.00	115.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				58.000		
STP	151.00	115.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				58.000		
STP	151.00	115.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				58.000		
STP	151.00	115.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	58.000		
STP	151.00	115.00	0		3	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	87			58.000		Y
STP	151.00	115.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				58.000		
STP	151.00	115.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				58.000		
STP	151.00	115.00	0		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	58.001		
STP	151.00	115.00	0		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	58.002		
**	NORTH 151.00 / WEST 120.00															
STP	151.00	120.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				43.000		
STP	151.00	120.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZITE				43.000		
**	NORTH 151.00 / WEST 135.00															
STP	151.00	135.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		FERROG SNDS	42			28.000		Y
STP	151.00	135.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				28.000		
**	NORTH 151.00 / WEST 140.00															
STP	151.00	140.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				20.000		
**	NORTH 156.00 / WEST 110.00															
STP	156.00	110.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				73.000		
STP	156.00	110.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				73.000		
STP	156.00	110.00	0		3	LITH	DEBITAGE	CHUNK		QUARTZ				73.000		
STP	156.00	110.00	0		2	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				73.000		
**	NORTH 156.00 / WEST 115.00															
STP	156.00	115.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	22			57.000		Y
**	NORTH 156.00 / WEST 120.00															
STP	156.00	120.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				42.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	156.00	120.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				42.000		
STP	156.00	120.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				42.000		
STP	156.00	120.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				42.000		
STP	156.00	120.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				42.000		
STP	156.00	120.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				42.000		
STP	156.00	120.00	0		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				42.000		
STP	156.00	120.00	0		1	LITH	BIFACE	STAGE 2 BIFACE		QUARTZITE		BASE		42.001		
STP	156.00	120.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				42.002		
**	NORTH 156.00 / WEST 130.00															
STP	156.00	130.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				33.000		
STP	156.00	130.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				33.000		
STP	156.00	130.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				33.000		
STP	156.00	130.00	0		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				33.001		
**	NORTH 156.00 / WEST 135.00															
STP	156.00	135.00	0		1	CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	27.000		
STP	156.00	135.00	0		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX	DRK GRY	CHERT				27.000		
STP	156.00	135.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				27.000		
STP	156.00	135.00	0		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				27.000		
STP	156.00	135.00	0		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				27.000		
**	NORTH 156.00 / WEST 140.00															
STP	156.00	140.00	0		1	LITH	DEBITAGE	CHUNK		QUARTZ				19.000		
STP	156.00	140.00	0		1	LITH	OTHER	FIRE-CRACKED ROCK		FERRG SNDS	25			19.000		Y
STP	156.00	140.00	0		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				19.000		
**	NORTH 156.00 / WEST 145.00															
STP	156.00	145.00	0		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				16.000		
**	NORTH 161.00 / WEST 130.00															
STP	161.00	130.00	0		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				32.000		
STP	161.00	130.00	0		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				32.000		
STP	161.00	130.00	0		1	LITH	OTHER	UNMODIFIED		QUARTZ				32.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
STP	161.00	130.00	0	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZITE				32.000		
STP	161.00	130.00	0	2 LITH	OTHER	FIRE-CRACKED ROCK		CHERT	16			32.000		Y
**	NORTH 161.00 / WEST 135.00													
STP	161.00	135.00	0	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				26.000		
STP	161.00	135.00	0	1 LITH	DEBITAGE	TERTIARY FLAKE	CRM/WHT	CHERT				26.000		
STP	161.00	135.00	0	3 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				26.000		
STP	161.00	135.00	0	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				26.000		
STP	161.00	135.00	0	3 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				26.000		
STP	161.00	135.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				26.000		
STP	161.00	135.00	0	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				26.000		
STP	161.00	135.00	0	1 LITH	BIFACE	STRAIGHT-STEMMED POINT		QUARTZITE		WHOLE		26.001		
**	NORTH 161.00 / WEST 140.00													
STP	161.00	140.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				18.000		
STP	161.00	140.00	0	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				18.000		
STP	161.00	140.00	0	5 LITH	DEBITAGE	CHUNK		QUARTZ				18.000		
STP	161.00	140.00	0	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				18.000		
STP	161.00	140.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	18.001		
**	NORTH 161.00 / WEST 145.00													
STP	161.00	145.00	0	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	15.001		
**	NORTH 162.00 / WEST 138.00													
UNIT	162.00	138.00	1 A	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				169.000		
UNIT	162.00	138.00	1 A	6 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	35			169.000		Y
UNIT	162.00	138.00	1 A	1 HIST	GLASS	20TH CENTURY						169.000		Y
UNIT	162.00	138.00	1 A	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				169.000		
UNIT	162.00	138.00	1 A	2 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				169.000		
UNIT	162.00	138.00	1 A	1 HIST	OTHER	20TH CENTURY						169.000		Y
UNIT	162.00	138.00	1 A	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				169.000		
UNIT	162.00	138.00	1 A	5 LITH	DEBITAGE	CHUNK		QUARTZ				169.000		
UNIT	162.00	138.00	2 B	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				170.000		
UNIT	162.00	138.00	2 B	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				170.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	162.00	138.00	2	B	1	LITH	DEBITAGE	CHUNK	MED GRY	CHERT				170.000		
UNIT	162.00	138.00	2	B	2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				170.000		
UNIT	162.00	138.00	2	B	13	LITH	DEBITAGE	CHUNK		QUARTZ				170.000		
UNIT	162.00	138.00	2	B	1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				170.000		
UNIT	162.00	138.00	2	B	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				170.000		
UNIT	162.00	138.00	2	B	2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				170.000		
UNIT	162.00	138.00	2	B	5	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZ	33			170.000		Y
UNIT	162.00	138.00	2	B	1	HIST	GLASS	20TH CENTURY						170.000		Y
UNIT	162.00	138.00	2	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				170.000		
UNIT	162.00	138.00	2	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				170.000		
UNIT	162.00	138.00	2	B	8	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				170.000		
UNIT	162.00	138.00	2	B	1	LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZ				170.001		
UNIT	162.00	138.00	2	B	1	LITH	UNIFACE	RETOUCHED SECONDARY FLAKE	CRM/WHT	CHERT		FRAG		170.002		
UNIT	162.00	138.00	2	B	1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZ				170.003		
UNIT	162.00	138.00	3	B	1	FAUN	BONE	UNDETERMINED				FRAG	BURNED	171.000		
UNIT	162.00	138.00	3	B	8	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				171.000		
UNIT	162.00	138.00	3	B	2	HIST	GLASS	UNDETERMINED						171.000		N
UNIT	162.00	138.00	3	B	9	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				171.000		
UNIT	162.00	138.00	3	B	21	LITH	DEBITAGE	CHUNK		QUARTZ				171.000		
UNIT	162.00	138.00	3	B	1	LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				171.000		
UNIT	162.00	138.00	3	B	1	LITH	DEBITAGE	CHUNK		QUARTZITE				171.000		
UNIT	162.00	138.00	3	B	12	LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	38			171.000		Y
UNIT	162.00	138.00	3	B	3	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				171.000		
UNIT	162.00	138.00	3	B	7	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				171.000		
UNIT	162.00	138.00	3	B	1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				171.000		
UNIT	162.00	138.00	3	B	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				171.000		
UNIT	162.00	138.00	3	B	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				171.000		
UNIT	162.00	138.00	3	B	1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	171.001		
UNIT	162.00	138.00	3	B	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	171.002		
PPLOT	162.00	138.00	3	B	1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	172.001	Artifact # 1	
UNIT	162.00	138.00	4	C	1	LITH	DEBITAGE	TERTIARY FLAKE	LT GRY	CHERT				174.000		
UNIT	162.00	138.00	4	C	1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				174.000		
UNIT	162.00	138.00	4	C	4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				174.000		
UNIT	162.00	138.00	4	C	29	LITH	DEBITAGE	CHUNK		QUARTZ				174.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	162.00	138.00	4 C	7 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	57			174.000		Y
UNIT	162.00	138.00	4 C	4 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				174.000		
UNIT	162.00	138.00	4 C	6 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				174.000		
UNIT	162.00	138.00	4 C	6 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				174.000		
UNIT	162.00	138.00	4 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				174.000		
PPLOT	162.00	138.00	4 C	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	175.001	Artifact # 1	
UNIT	162.00	138.00	5 C	1 LITH	DEBITAGE	CHUNK	LT GRY	CHERT				173.000	Mole disturbance	
UNIT	162.00	138.00	5 C	12 LITH	DEBITAGE	CHUNK		QUARTZ				173.000	Mole disturbance	
UNIT	162.00	138.00	5 C	3 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	11			173.000	Mole disturbance	Y
UNIT	162.00	138.00	5 C	1 HIST	GLASS	20TH CENTURY						173.000	Mole disturbance	Y
UNIT	162.00	138.00	5 C	1 CER	VESSEL	SAND-TEMPERED		NET-SURF		BODY	UNDECOR	173.001	Mole disturbance	
UNIT	162.00	138.00	5 C	1 LITH	BIFACE	UNCLASSIFIABLE POINT		QUARTZ		TIP		173.002	Mole disturbance	
UNIT	162.00	138.00	5 C	2 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				176.000		
UNIT	162.00	138.00	5 C	2 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				176.000		
UNIT	162.00	138.00	5 C	5 LITH	DEBITAGE	CHUNK		QUARTZ				176.000		
UNIT	162.00	138.00	5 C	3 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				176.000		
UNIT	162.00	138.00	5 C	3 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				176.000		
UNIT	162.00	138.00	5 C	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				176.000		
UNIT	162.00	138.00	5 C	1 LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				176.000		
UNIT	162.00	138.00	5 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				176.000		
UNIT	162.00	138.00	5 C	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				176.000		
UNIT	162.00	138.00	5 C	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	6			176.000		Y
UNIT	162.00	138.00	5 C	1 LITH	USE-MODI	EDGE BATTERED HAMMERSTONE		QUARTZITE		WHOLE		176.001		
UNIT	162.00	138.00	5 C	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				176.002		
UNIT	162.00	138.00	6 C	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				177.000		
UNIT	162.00	138.00	6 C	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				177.000		
UNIT	162.00	138.00	6 C	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				177.000		
UNIT	162.00	138.00	6 C	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				177.000		
UNIT	162.00	138.00	6 C	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				177.000		
UNIT	162.00	138.00	6 C	1 LITH	DEBITAGE	CHUNK	BLACK	CHERT				177.000		
UNIT	162.00	138.00	7 D	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				178.000		
UNIT	162.00	138.00	7 D	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				178.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE II

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 166.00 / WEST 130.00													
STP	166.00	130.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				31.000		
STP	166.00	130.00	0	2 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				31.000		
STP	166.00	130.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE	CRM/WHT	CHERT				31.000		
STP	166.00	130.00	0	5 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	74			31.000		Y
STP	166.00	130.00	0	1 CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	31.001		
**	NORTH 166.00 / WEST 135.00													
STP	166.00	135.00	0	2 LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE	6			25.000		Y
STP	166.00	135.00	0	2 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				25.000		
STP	166.00	135.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				25.000		
STP	166.00	135.00	0	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	25.001		
**	NORTH 166.00 / WEST 140.00													
STP	166.00	140.00	0	2 LITH	DEBITAGE	CHUNK		QUARTZ				17.000		
STP	166.00	140.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				17.000		
STP	166.00	140.00	0	1 LITH	DEBITAGE	CHUNK	MED GRY	CHERT				17.000		
STP	166.00	140.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				17.000		
STP	166.00	140.00	0	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				17.000		
STP	166.00	140.00	0	2 CER	VESSEL	(SHERDLET)		UNCLAS-SURF			UNDECOR	17.000		
STP	166.00	140.00	0	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				17.000		
STP	166.00	140.00	0	1 CER	VESSEL	FINE OYSTER SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	17.001		
STP	166.00	140.00	0	1 CER	VESSEL	SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	17.002		
STP	166.00	140.00	0	1 CER	VESSEL	SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	17.003		
STP	166.00	140.00	0	1 CER	VESSEL	FINE OYSTER SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	17.004		
**	NORTH 166.00 / WEST 145.00													
STP	166.00	145.00	0	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				14.000		
STP	166.00	145.00	0	1 CER	VESSEL	(SHERDLET)		CORD-SURF			UNDECOR	14.000		
**	NORTH 171.00 / WEST 135.00													
STP	171.00	135.00	0	1 LITH	DEBITAGE	CHUNK		QUARTZ				24.000		
STP	171.00	135.00	0	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				24.000		
STP	171.00	135.00	0	1 CER	VESSEL	SAND & SHELL-TEMPERED		FABRIC-SURF		BODY	UNDECOR	24.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH	0.00 / WEST	0.00													
UNPROV	0.00	0.00	0		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				605.001		
UNPROV	0.00	0.00	0		1	CER	VESSEL	STEATITE-TEMPERED		SMOOTH-SURF		BASE	UNDECOR	759.001		
**	NORTH	107.00 / WEST	97.00													
UNIT	107.00	97.00	2		6	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				1109.000		
UNIT	107.00	97.00	2		3	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				1109.000		
UNIT	107.00	97.00	2		4	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1109.000		
UNIT	107.00	97.00	2		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				1109.000		
UNIT	107.00	97.00	2		8	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				1109.000		
UNIT	107.00	97.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			1			1109.000		Y
UNIT	107.00	97.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				1109.000		
UNIT	107.00	97.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE	DRK YEL	CHERT				1109.000		
UNIT	107.00	97.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		CRYS QUARTZ				1109.000		
UNIT	107.00	97.00	2		2	LITH	DEBITAGE	PRIMARY FLAKE		CRYS QUARTZ				1109.000		
UNIT	107.00	97.00	2		2	CER	VESSEL	(SHERDLET)						1109.000		
UNIT	107.00	97.00	2		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				1109.000		
UNIT	107.00	97.00	2		11	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1109.000		
UNIT	107.00	97.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				1109.000		
UNIT	107.00	97.00	2		17	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1109.000		
UNIT	107.00	97.00	2		4	LITH	DEBITAGE	CHUNK		QUARTZ				1109.000		
UNIT	107.00	97.00	2		4	FAUN	BONE	WORKED				FRAG	BURNED	1109.000		
UNIT	107.00	97.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	1109.001		
UNIT	107.00	97.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1109.002		
UNIT	107.00	97.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1109.003		
PPLOT	107.00	97.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1110.001		
PPLOT	107.00	97.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	CORD-DECOR	1111.001		
PPLOT	107.00	97.00	2		1	LITH	BIFACE	UNCLASSIFIABLE POINT		ARGILLITE		TIP		1112.001		
PPLOT	107.00	97.00	2		1	LITH	OTHER	UNMODIFIED						1113.000		Y
PPLOT	107.00	97.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			33			1114.000		Y
PPLOT	107.00	97.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			5			1115.000		Y
PPLOT	107.00	97.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1116.000		
PPLOT	107.00	97.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			16			1117.000		Y
UNIT	107.00	97.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1149.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	107.00	97.00	3		2	LITH	DEBITAGE	CHUNK		QUARTZ				1149.000		
UNIT	107.00	97.00	3		5	LITH	DEBITAGE	SECONDARY FLAKE		CRYS QUARTZ				1149.000		
UNIT	107.00	97.00	3		19	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1149.000		
UNIT	107.00	97.00	3		4	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				1149.000		
UNIT	107.00	97.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				1149.000		
UNIT	107.00	97.00	3		4	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				1149.000		
UNIT	107.00	97.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		CRYS QUARTZ				1149.000		
UNIT	107.00	97.00	3		7	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1149.000		
UNIT	107.00	97.00	3		1	FAUN	BONE	WORKED				FRAG	BURNED	1149.000		
UNIT	107.00	97.00	3		9	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				1149.000		
UNIT	107.00	97.00	3		2	LITH	OTHER	FIRE-CRACKED ROCK			1			1149.000		Y
UNIT	107.00	97.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1149.001		
UNIT	107.00	97.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZ				1149.002		
UNIT	107.00	97.00	3		1	CER	VESSEL	UNDETERMINED		UNCLAS-SURF		UNKNOWN	UNDECOR	1149.003		
PPLOT	107.00	97.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1150.001		
PPLOT	107.00	97.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1151.001		
PPLOT	107.00	97.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			11			1152.000		Y
PPLOT	107.00	97.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	1153.001		
PPLOT	107.00	97.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1154.001		
PPLOT	107.00	97.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1155.001		
PPLOT	107.00	97.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			15			1156.000		Y
PPLOT	107.00	97.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1157.001		
PPLOT	107.00	97.00	3		1	LITH	OTHER	UNMODIFIED						1158.000		N
PPLOT	107.00	97.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			5			1159.000		Y
PPLOT	107.00	97.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1160.001		
**	NORTH	107.00 / WEST	98.00													
UNIT	107.00	98.00	2		8	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1118.000		
UNIT	107.00	98.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				1118.000		
UNIT	107.00	98.00	2		3	CER	VESSEL	(SHERDLET)						1118.000		
UNIT	107.00	98.00	2		4	LITH	OTHER	FIRE-CRACKED ROCK			18			1118.000		Y
UNIT	107.00	98.00	2		2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				1118.000		
UNIT	107.00	98.00	2		3	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				1118.000		
UNIT	107.00	98.00	2		1	FAUN	BONE	WORKED				FRAG	BURNED	1118.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	107.00	98.00	2	8 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1118.000		
UNIT	107.00	98.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1118.001		
UNIT	107.00	98.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1118.002		
PPLOT	107.00	98.00	2	1 HIST	GLASS	MODERN						1119.000		Y
PPLOT	107.00	98.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1120.001		
PPLOT	107.00	98.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				1121.000		
PPLOT	107.00	98.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	CORD-DECOR	1122.001		
PPLOT	107.00	98.00	2	2 LITH	OTHER	UNMODIFIED		FERRG SNDS				1123.000		N
PPLOT	107.00	98.00	2	1 LITH	PEK/GRND	BANNER STONE		SILTSTONE		FRAG		1124.001		
PPLOT	107.00	98.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1125.001		
PPLOT	107.00	98.00	2	1 LITH	OTHER	UNMODIFIED		SLATE				1126.000		N
PPLOT	107.00	98.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			25			1127.000		Y
PPLOT	107.00	98.00	2	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		FRAG		1128.001		
PPLOT	107.00	98.00	2	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		TIP		1129.001		
PPLOT	107.00	98.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			47			1130.000		Y
PPLOT	107.00	98.00	2	1 CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1131.001		
UNIT	107.00	98.00	3	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				1161.000		
UNIT	107.00	98.00	3	5 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1161.000		
UNIT	107.00	98.00	3	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1161.000		
UNIT	107.00	98.00	3	3 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				1161.000		
UNIT	107.00	98.00	3	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				1161.000		
UNIT	107.00	98.00	3	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				1161.000		
UNIT	107.00	98.00	3	4 LITH	OTHER	FIRE-CRACKED ROCK			2			1161.000		Y
UNIT	107.00	98.00	3	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				1161.000		
UNIT	107.00	98.00	3	7 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1161.000		
UNIT	107.00	98.00	3	1 LITH	BIFACE	LANCEOLATE POINT		QUARTZ		WHOLE		1161.001		
UNIT	107.00	98.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1161.002		
UNIT	107.00	98.00	3	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZITE				1161.003		
PPLOT	107.00	98.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			95			1162.000		Y
PPLOT	107.00	98.00	3	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				1163.000		
PPLOT	107.00	98.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			1			1164.000		Y
PPLOT	107.00	98.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			48			1165.000		Y
PPLOT	107.00	98.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			8			1166.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH	108.00 /	WEST	97.00												
UNIT	108.00	97.00	1		1	LITH	BIFACE	STRAIGHT-STEMMED POINT		QUARTZ		WHOLE		1093.001		
UNIT	108.00	97.00	2		1	CER	VESSEL	(SHERDLET)						1103.000		
UNIT	108.00	97.00	2		4	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1103.000		
UNIT	108.00	97.00	2		4	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				1103.000		
UNIT	108.00	97.00	2		2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				1103.000		
UNIT	108.00	97.00	2		5	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				1103.000		
UNIT	108.00	97.00	2		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1103.000		
UNIT	108.00	97.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				1103.000		
UNIT	108.00	97.00	2		12	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1103.000		
UNIT	108.00	97.00	2		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				1103.000		
UNIT	108.00	97.00	2		4	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				1103.000		
UNIT	108.00	97.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				1103.000		
UNIT	108.00	97.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			1			1103.000		Y
UNIT	108.00	97.00	2		4	LITH	DEBITAGE	CHUNK		QUARTZ				1103.000		
PPLOT	108.00	97.00	2		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				1104.000		
PPLOT	108.00	97.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			16			1105.000		Y
PPLOT	108.00	97.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1106.001		
PPLOT	108.00	97.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1107.001		
PPLOT	108.00	97.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				1108.000		
UNIT	108.00	97.00	3		2	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZITE				1140.000		
UNIT	108.00	97.00	3		4	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				1140.000		
UNIT	108.00	97.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				1140.000		
UNIT	108.00	97.00	3		5	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1140.000		
UNIT	108.00	97.00	3		4	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				1140.000		
UNIT	108.00	97.00	3		4	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				1140.000		
UNIT	108.00	97.00	3		13	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1140.000		
UNIT	108.00	97.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				1140.000		
UNIT	108.00	97.00	3		8	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				1140.000		
UNIT	108.00	97.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		CRYS QUARTZ				1140.000		
UNIT	108.00	97.00	3		2	LITH	OTHER	FIRE-CRACKED ROCK			20			1140.000		Y
UNIT	108.00	97.00	3		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				1140.000		
UNIT	108.00	97.00	3		2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				1140.000		
UNIT	108.00	97.00	3		4	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				1140.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	108.00	97.00	3		2	LITH	DEBITAGE	CHUNK		QUARTZ				1140.000		
UNIT	108.00	97.00	3		18	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1140.000		
UNIT	108.00	97.00	3		1	CER	VESSEL	(SHERDLET)						1140.000		
UNIT	108.00	97.00	3		1	LITH	UNIFACE	RETOUCHED SECONDARY FLAKE		QUARTZ		FRAG		1140.001		
UNIT	108.00	97.00	3		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				1140.001		
UNIT	108.00	97.00	3		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				1140.002		
PPLOT	108.00	97.00	3		1	LITH	OTHER	UNMODIFIED		RED OCHRE				1141.000		N
PPLOT	108.00	97.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			33			1142.000		Y
PPLOT	108.00	97.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				1143.000		
PPLOT	108.00	97.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			38			1144.000		Y
PPLOT	108.00	97.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZITE				1145.000		
PPLOT	108.00	97.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				1146.001		
PPLOT	108.00	97.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			33			1147.000		Y
PPLOT	108.00	97.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				1148.000		
**	NORTH	108.00 / WEST	98.00													
UNIT	108.00	98.00	1		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1092.000		
UNIT	108.00	98.00	1		3	HIST	METAL	MODERN						1092.000		Y
UNIT	108.00	98.00	1		1	HIST	GLASS	MODERN						1092.000		Y
UNIT	108.00	98.00	1		2	LITH	OTHER	FIRE-CRACKED ROCK			58			1092.000		Y
UNIT	108.00	98.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	1092.001		
UNIT	108.00	98.00	1		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				1092.002		
UNIT	108.00	98.00	2		1	CER	VESSEL	(SHERDLET)						1094.000		
UNIT	108.00	98.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1094.000		
UNIT	108.00	98.00	2		2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				1094.000		
UNIT	108.00	98.00	2		5	LITH	DEBITAGE	MICROFLAKE		QUARTZ				1094.000		
UNIT	108.00	98.00	2		2	FAUN	BONE	UNDETERMINED				FRAG	BURNED	1094.000		
UNIT	108.00	98.00	2		5	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1094.000		
UNIT	108.00	98.00	2		4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1094.000		
UNIT	108.00	98.00	2		2	LITH	DEBITAGE	CHUNK		QUARTZ				1094.000		
UNIT	108.00	98.00	2		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				1094.000		
UNIT	108.00	98.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		CRYS QUARTZ				1094.000		
UNIT	108.00	98.00	2		2	LITH	OTHER	FIRE-CRACKED ROCK			18			1094.000		Y
UNIT	108.00	98.00	2		3	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				1094.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	108.00	98.00	2		5	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				1094.000		
UNIT	108.00	98.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	1094.001		
UNIT	108.00	98.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1094.002		
PPLOT	108.00	98.00	2		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				1095.001		
PPLOT	108.00	98.00	2		1	LITH	OTHER	UNMODIFIED						1096.000		Y
PPLOT	108.00	98.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			14			1097.000		Y
PPLOT	108.00	98.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			8			1098.000		Y
PPLOT	108.00	98.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			8			1099.000		Y
PPLOT	108.00	98.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			26			1100.000		Y
PPLOT	108.00	98.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK						1101.000		Y
PPLOT	108.00	98.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			11			1102.000		Y
UNIT	108.00	98.00	3		6	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1132.000		
UNIT	108.00	98.00	3		9	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1132.000		
UNIT	108.00	98.00	3		4	LITH	DEBITAGE	CHUNK		QUARTZ				1132.000		
UNIT	108.00	98.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZITE				1132.000		
UNIT	108.00	98.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1132.000		
UNIT	108.00	98.00	3		2	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				1132.000		
UNIT	108.00	98.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				1132.000		
UNIT	108.00	98.00	3		2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				1132.000		
UNIT	108.00	98.00	3		7	LITH	DEBITAGE	MICROFLAKE		QUARTZ				1132.000		
UNIT	108.00	98.00	3		2	LITH	OTHER	FIRE-CRACKED ROCK			19			1132.000		Y
UNIT	108.00	98.00	3		1	LITH	BIFACE	STAGE 2 BIFACE		QUARTZITE		BASE		1132.001		
PPLOT	108.00	98.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			25			1133.000		Y
PPLOT	108.00	98.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			28			1134.000		Y
PPLOT	108.00	98.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			30			1135.000		Y
PPLOT	108.00	98.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			247			1136.000		Y
PPLOT	108.00	98.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			70			1137.000		Y
PPLOT	108.00	98.00	3		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				1138.001		
PPLOT	108.00	98.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			3			1139.000		Y
UNIT	108.00	98.00	4		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1167.000		
UNIT	108.00	98.00	4		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				1167.000		
UNIT	108.00	98.00	4		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				1167.000		
UNIT	108.00	98.00	4		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1167.000		
UNIT	108.00	98.00	4		1	LITH	DEBITAGE	CHUNK		QUARTZ				1167.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	108.00	98.00	4		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				1167.000		
UNIT	108.00	98.00	4		3	LITH	DEBITAGE	MICROFLAKE		QUARTZ				1167.000		
UNIT	108.00	98.00	4		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1167.000		
PPLOT	108.00	98.00	4		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1168.000		
PPLOT	108.00	98.00	4		1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				1169.000		
**	NORTH	109.00 / WEST	95.00													
PPLOT	109.00	95.00	0		1	LITH	BIFACE	EXPANDING-STEMMED POINT		QUARTZ		WHOLE		1175.001		
**	NORTH	109.00 / WEST	109.00													
UNIT	109.00	109.00	1		2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				958.000		
UNIT	109.00	109.00	1		1	LITH	OTHER	FIRE-CRACKED ROCK			110			958.000		Y
UNIT	109.00	109.00	2		1	LITH	DEBITAGE	CORE REJUVENATION FLAKE	CRM/WHT	CHERT				989.000		
UNIT	109.00	109.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				989.000		
UNIT	109.00	109.00	2		3	LITH	DEBITAGE	TERTIARY FLAKE	BLACK/T	CHERT				989.000		
UNIT	109.00	109.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				989.000		
UNIT	109.00	109.00	2		2	LITH	DEBITAGE	PRIMARY FLAKE	CRM/WHT	CHERT				989.000		
UNIT	109.00	109.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			2			989.000		Y
UNIT	109.00	109.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				989.000		
UNIT	109.00	109.00	2		3	LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				989.000		
UNIT	109.00	109.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				989.000		
UNIT	109.00	109.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		CRYS QUARTZ				989.000		
UNIT	109.00	109.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				989.000		
UNIT	109.00	109.00	2		1	HIST	GLASS	MODERN						989.000		N
UNIT	109.00	109.00	2		4	CER	VESSEL	(SHERDLET)						989.000		
UNIT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	989.001		
UNIT	109.00	109.00	2		1	CER	VESSEL	SANDSTONE-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	989.003		
UNIT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	989.004		
UNIT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	989.005		
UNIT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	989.006		
UNIT	109.00	109.00	2		1	LITH	UNIFACE	RETOUCHED SECONDARY FLAKE	DRK YEL	CHERT		FRAG		989.007		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	990.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	991.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	992.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	993.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	994.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	995.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	996.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	997.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	998.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	999.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1000.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1001.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1002.001		
PPLOT	109.00	109.00	2		1	LITH	OTHER	UNMODIFIED						1003.000		Y
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1004.001		
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1005.001		
PPLOT	109.00	109.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				1006.000		
PPLOT	109.00	109.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			22			1007.000		Y
PPLOT	109.00	109.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1008.001		
UNIT	109.00	109.00	3		2	LITH	DEBITAGE	SECONDARY FLAKE	DRK GRY	CHERT				1055.000		
UNIT	109.00	109.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			3			1055.000		Y
UNIT	109.00	109.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1055.000		
UNIT	109.00	109.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1055.001		
UNIT	109.00	109.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1055.002		
PPLOT	109.00	109.00	3		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1056.001		
PPLOT	109.00	109.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1057.001		
PPLOT	109.00	109.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1058.001		
PPLOT	109.00	109.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE				1059.001		
PPLOT	109.00	109.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1060.001		
UNIT	109.00	109.00	4		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1082.000		
UNIT	109.00	109.00	4		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				1082.000		
PPLOT	109.00	109.00	4		1	LITH	OTHER	UNMODIFIED						1083.000		Y
PPLOT	109.00	109.00	4		1	LITH	OTHER	UNMODIFIED						1084.000		Y
PPLOT	109.00	109.00	4		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1085.001		
PPLOT	109.00	109.00	4		1	LITH	OTHER	UNMODIFIED						1086.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 109.00 / WEST 110.00													
UNIT	109.00	110.00	1	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				959.000		
UNIT	109.00	110.00	1	2 LITH	DEBITAGE	CHUNK		QUARTZ				959.000		
UNIT	109.00	110.00	1	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				959.001		
UNIT	109.00	110.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				1009.000		
UNIT	109.00	110.00	2	2 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE	MED GRY	CHERT				1009.000		
UNIT	109.00	110.00	2	3 LITH	DEBITAGE	PRIMARY FLAKE	DRK RED	CHERT				1009.000		
UNIT	109.00	110.00	2	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1009.000		
UNIT	109.00	110.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE	MED BRN	CHERT				1009.000		
UNIT	109.00	110.00	2	3 LITH	DEBITAGE	SECONDARY FLAKE	DRK RED	CHERT				1009.000		
UNIT	109.00	110.00	2	3 LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				1009.000		
UNIT	109.00	110.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT			HEAT DAMMG	1009.000		
UNIT	109.00	110.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			4			1009.000		Y
UNIT	109.00	110.00	2	7 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				1009.000		
UNIT	109.00	110.00	2	3 LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				1009.000		
UNIT	109.00	110.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE	BLACK/T	CHERT				1009.000		
UNIT	109.00	110.00	2	2 LITH	DEBITAGE	PRIMARY FLAKE	BLACK	CHERT				1009.000		
UNIT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1009.001		
UNIT	109.00	110.00	2	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	1009.002		
UNIT	109.00	110.00	2	1 CER	VESSEL	SANDSTONE-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	1009.003		
UNIT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1009.004		
UNIT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1009.005		
UNIT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1009.006		
UNIT	109.00	110.00	2	1 SAMP	CHARCOAL	RADIOCARBON						1010.000		N
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1011.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1012.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1013.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1014.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1015.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDET DEC	1016.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		RIM	UNDET DEC	1017.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1018.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1019.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1020.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	109.00	110.00	2	1 CER	VESSEL	SANDSTONE-TEMPERED		UNDETR-SURF		RIM	UNDET DEC	1021.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1022.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1023.001		
PPLOT	109.00	110.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			7			1024.000		Y
PPLOT	109.00	110.00	2	1 CER	VESSEL	(SHERDLET)					UNDETER	1025.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1026.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1027.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1028.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1029.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1030.001		
PPLOT	109.00	110.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1031.001		
UNIT	109.00	110.00	3	1 LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				1061.000		
UNIT	109.00	110.00	3	1 LITH	DEBITAGE	PRIMARY FLAKE	BLACK/T	CHERT				1061.000		
UNIT	109.00	110.00	3	1 LITH	DEBITAGE	TERTIARY FLAKE	DRK YEL	CHERT				1061.000		
UNIT	109.00	110.00	3	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				1061.000		
UNIT	109.00	110.00	3	5 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				1061.000		
UNIT	109.00	110.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1061.001		
UNIT	109.00	110.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1061.002		
PPLOT	109.00	110.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1062.001		
PPLOT	109.00	110.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			1			1063.000		Y
PPLOT	109.00	110.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1064.001		
PPLOT	109.00	110.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1065.001		
PPLOT	109.00	110.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1066.001		
PPLOT	109.00	110.00	3	1 CER	VESSEL	(SHERDLET)					UNDETER	1067.000		
PPLOT	109.00	110.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1068.001		
PPLOT	109.00	110.00	4	1 LITH	OTHER	UNMODIFIED						1087.000		Y
PPLOT	109.00	110.00	4	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1088.001		
**	NORTH	110.00 / WEST	109.00											
PPLOT	110.00	109.00	1	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	956.001		
PPLOT	110.00	109.00	1	1 LITH	OTHER	FIRE-CRACKED ROCK			17			957.000		Y
UNIT	110.00	109.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				979.000		
UNIT	110.00	109.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE	DRK YEL	CHERT				979.000		
UNIT	110.00	109.00	2	4 LITH	OTHER	FIRE-CRACKED ROCK			25			979.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	110.00	109.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				979.000		
UNIT	110.00	109.00	2	2 LITH	DEBITAGE	MICROFLAKE		QUARTZ				979.000		
UNIT	110.00	109.00	2	3 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				979.000		
UNIT	110.00	109.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				979.000		
UNIT	110.00	109.00	2	1 HIST	GLASS	MODERN						979.000		N
UNIT	110.00	109.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				979.000		
UNIT	110.00	109.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				979.000		
UNIT	110.00	109.00	2	1 LITH	DEBITAGE	MICROFLAKE		QUARTZITE				979.000		
UNIT	110.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	979.001		
UNIT	110.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	979.002		
PPLOT	110.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	980.001		
PPLOT	110.00	109.00	2	1 CER	VESSEL	SANDSTONE-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	981.001		
PPLOT	110.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	982.001		
PPLOT	110.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	983.001		
PPLOT	110.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	984.001		
PPLOT	110.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	985.001		
PPLOT	110.00	109.00	2	1 CER	VESSEL	UNDETERMINED		CORD-SURF		BODY	UNDECOR	986.001		
PPLOT	110.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	987.001		
PPLOT	110.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	988.001		
PPLOT	110.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	988.002		
UNIT	110.00	109.00	3	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				1045.000		
UNIT	110.00	109.00	3	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1045.000		
UNIT	110.00	109.00	3	1 CER	VESSEL	(SHERDLET)						1045.000		
PPLOT	110.00	109.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1046.001		
PPLOT	110.00	109.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	CORD-DECOR	1047.001		
PPLOT	110.00	109.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		RIM	UNDET DEC	1048.001		
PPLOT	110.00	109.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			61			1049.000		Y
PPLOT	110.00	109.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1050.001		
PPLOT	110.00	109.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1051.001		
PPLOT	110.00	109.00	3	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				1052.001		
PPLOT	110.00	109.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1053.001		
PPLOT	110.00	109.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1054.001		
UNIT	110.00	109.00	4	1 LITH	OTHER	FIRE-CRACKED ROCK			1			1077.000		Y
UNIT	110.00	109.00	4	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1077.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	110.00	109.00	4		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1077.001		
PPLOT	110.00	109.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			39			1078.000		Y
PPLOT	110.00	109.00	4		1	CER	VESSEL	(SHERDLET)					UNDETER	1079.000		
PPLOT	110.00	109.00	4		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				1080.001		
PPLOT	110.00	109.00	4		1	CER	VESSEL	(SHERDLET)					UNDETER	1081.000		
**	NORTH 110.00 / WEST 110.00															
UNIT	110.00	110.00	1		21	HIST	GLASS	MODERN						951.000		Y
UNIT	110.00	110.00	1		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				951.000		
UNIT	110.00	110.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK RED	CHERT				951.000		
UNIT	110.00	110.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				951.000		
UNIT	110.00	110.00	1		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				951.000		
UNIT	110.00	110.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				951.000		
UNIT	110.00	110.00	1		2	HIST	OTHER	MODERN						951.000		Y
UNIT	110.00	110.00	1		5	HIST	METAL	MODERN						951.000		Y
UNIT	110.00	110.00	1		1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDECOR	951.001		
UNIT	110.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		RIM	UNDECOR	951.002		
UNIT	110.00	110.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	951.003		
PPLOT	110.00	110.00	1		1	CER	VESSEL	SANDSTONE-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	952.001		
PPLOT	110.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDET DEC	953.001		
PPLOT	110.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	954.001		
PPLOT	110.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	955.001		
UNIT	110.00	110.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				960.000		
UNIT	110.00	110.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE	DRK RED	CHERT				960.000		
UNIT	110.00	110.00	2		2	LITH	DEBITAGE	PRIMARY FLAKE	DRK RED	CHERT				960.000		
UNIT	110.00	110.00	2		6	LITH	DEBITAGE	SECONDARY FLAKE	DRK RED	CHERT				960.000		
UNIT	110.00	110.00	2		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				960.000		
UNIT	110.00	110.00	2		19	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				960.000		
UNIT	110.00	110.00	2		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				960.000		
UNIT	110.00	110.00	2		1	CER	VESSEL	(SHERDLET)						960.000		
UNIT	110.00	110.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZ				960.000		
UNIT	110.00	110.00	2		1	LITH	DEBITAGE	CHUNK	DRK YEL	CHERT				960.000		
UNIT	110.00	110.00	2		1	CER	VESSEL	(SHERDLET)						960.000		
UNIT	110.00	110.00	2		2	FAUN	BONE	UNDETERMINED				FRAG	BURNED	960.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	110.00	110.00	2		3	LITH	DEBITAGE	MICROFLAKE	DRK YEL	CHERT				960.000		
UNIT	110.00	110.00	2		2	LITH	OTHER	FIRE-CRACKED ROCK			1			960.000		Y
UNIT	110.00	110.00	2		3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				960.000		
UNIT	110.00	110.00	2		2	LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				960.000		
UNIT	110.00	110.00	2		3	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE	DRK YEL	CHERT				960.000		
UNIT	110.00	110.00	2		6	LITH	DEBITAGE	TERTIARY FLAKE	DRK YEL	CHERT				960.000		
UNIT	110.00	110.00	2		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE	DRK RED	CHERT				960.000		
UNIT	110.00	110.00	2		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	960.001		
UNIT	110.00	110.00	2		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	960.002		
UNIT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	960.003		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	961.001		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	962.001		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	963.001		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	964.001		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	965.001		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	966.001		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	967.001		
PPLOT	110.00	110.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			9			968.000		Y
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	969.001		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	970.001		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	971.001		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	972.001		
PPLOT	110.00	110.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE	BAN YEL	CHERT				973.000		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		RIM	UNDET DEC	974.001		
PPLOT	110.00	110.00	2		1								UNDETER	975.000	Not collected insitu	
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDET DEC	976.001		
PPLOT	110.00	110.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDET DEC	977.001		
PPLOT	110.00	110.00	2		1	LITH	UNIFACE	RETOUCHED DECORTICATN FLAKE	MED BRN	CHERT		WHOLE		978.001		
UNIT	110.00	110.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE	BAN RED	CHERT				1032.000		
UNIT	110.00	110.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				1032.000		
UNIT	110.00	110.00	3		1	LITH	DEBITAGE	MICROFLAKE		RHYOLITE				1032.000		
UNIT	110.00	110.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				1032.000		
UNIT	110.00	110.00	3		2	CER	VESSEL	(SHERDLET)						1032.000		
UNIT	110.00	110.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				1032.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	110.00	110.00	3		1	LITH	DEBITAGE	MICROFLAKE		QUARTZ				1032.000		
UNIT	110.00	110.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZ				1032.000		
UNIT	110.00	110.00	3		1	LITH	DEBITAGE	MICROFLAKE	BLACK/T	CHERT				1032.000		
UNIT	110.00	110.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1032.000		
UNIT	110.00	110.00	3		4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				1032.000		
UNIT	110.00	110.00	3		1	CER	VESSEL	(SHERDLET)						1032.000		
UNIT	110.00	110.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1032.001		
UNIT	110.00	110.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1032.002		
PPLOT	110.00	110.00	3		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1033.001		
PPLOT	110.00	110.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		RIM	UNDET DEC	1034.001		
PPLOT	110.00	110.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		RIM	UNDET DEC	1035.001		
PPLOT	110.00	110.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1036.001		
PPLOT	110.00	110.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		RIM	UNDET DEC	1037.001		
PPLOT	110.00	110.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1038.001		
PPLOT	110.00	110.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1039.001		
PPLOT	110.00	110.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1040.001		
PPLOT	110.00	110.00	3		1	CER	VESSEL	(SHERDLET)						1041.001		
PPLOT	110.00	110.00	3		1	LITH	OTHER	UNMODIFIED						1042.000		Y
PPLOT	110.00	110.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1043.001		
PPLOT	110.00	110.00	3		1	LITH	OTHER	UNMODIFIED						1044.000		Y
UNIT	110.00	110.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			13			1069.000		Y
UNIT	110.00	110.00	4		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1069.000		
UNIT	110.00	110.00	4		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				1069.000		
UNIT	110.00	110.00	4		3	LITH	DEBITAGE	MICROFLAKE		QUARTZ				1069.000		
UNIT	110.00	110.00	4		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				1069.000		
UNIT	110.00	110.00	4		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1069.001		
PPLOT	110.00	110.00	4		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				1070.001		
PPLOT	110.00	110.00	4		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1071.001		
PPLOT	110.00	110.00	4		1	LITH	OTHER	UNMODIFIED						1072.000		Y
PPLOT	110.00	110.00	4		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1073.001		
PPLOT	110.00	110.00	4		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1074.001		
PPLOT	110.00	110.00	4		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	1075.001		
PPLOT	110.00	110.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			52			1076.000		Y
UNIT	110.00	110.00	5		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	1089.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	110.00	110.00	5	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	1090.001		
PPLOT	110.00	110.00	5	1 CER	VESSEL						UNDETER	1091.000		
**	NORTH 111.00 / WEST 107.00													
UNIT	111.00	107.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			3			910.000		Y
UNIT	111.00	107.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				910.000		
UNIT	111.00	107.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				910.000		
UNIT	111.00	107.00	2	2 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				910.000		
UNIT	111.00	107.00	2	1 CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	910.001		
UNIT	111.00	107.00	2	1 CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		UNKNOWN	UNDET DEC	910.002		
UNIT	111.00	107.00	2	1 CER	VESSEL	SAND & SHELL-TEMPERED		UNCLAS-SURF		UNKNOWN	UNDET DEC	910.003		
PPLOT	111.00	107.00	2	1 CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	911.001		
PPLOT	111.00	107.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	912.001		
PPLOT	111.00	107.00	2	1 LITH	UNIFACE	END SCRAPER		QUARTZ		WHOLE		913.001		
PPLOT	111.00	107.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	914.001		
UNIT	111.00	107.00	3	1 LITH	DEBITAGE	CHUNK		QUARTZ				932.000		
UNIT	111.00	107.00	3	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				932.000		
UNIT	111.00	107.00	3	2 LITH	OTHER	FIRE-CRACKED ROCK			5			932.000		Y
PPLOT	111.00	107.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	933.001		
PPLOT	111.00	107.00	3	1 CER	VESSEL	STEATITE-TEMPERED		UNDETR-SURF		RIM	UNDET DEC	934.001		
PPLOT	111.00	107.00	3	1 CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	935.001		
**	NORTH 111.00 / WEST 108.00													
UNIT	111.00	108.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				915.000		
UNIT	111.00	108.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				915.000		
UNIT	111.00	108.00	2	1 CER	VESSEL	(SHERDLET)						915.000		
UNIT	111.00	108.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE	BLACK/T	CHERT				915.000		
UNIT	111.00	108.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZ				915.000		
PPLOT	111.00	108.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			1			916.000		Y
PPLOT	111.00	108.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	917.001		
PPLOT	111.00	108.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	918.001		
UNIT	111.00	108.00	3	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				936.000		
UNIT	111.00	108.00	3	4 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				936.000		
UNIT	111.00	108.00	3	5 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				936.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	111.00	108.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				936.000		
UNIT	111.00	108.00	3		2	LITH	OTHER	FIRE-CRACKED ROCK			1			936.000		Y
UNIT	111.00	108.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				936.000		
UNIT	111.00	108.00	3		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				936.000		
PPLOT	111.00	108.00	3		1	LITH	OTHER	UNMODIFIED						937.000		N
PPLOT	111.00	108.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			55			938.000		Y
PPLOT	111.00	108.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			52			939.000		Y
PPLOT	111.00	108.00	3		1	LITH	OTHER	UNMODIFIED						940.000		N
PPLOT	111.00	108.00	3		1	LITH	BIFACE	SIDE-NOTCHED POINT		QUARTZ		WHOLE		941.001		
PPLOT	111.00	108.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	942.001		
PPLOT	111.00	108.00	3		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	943.001		
PPLOT	111.00	108.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			13			944.000		Y
PPLOT	111.00	108.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	945.001		
PPLOT	111.00	108.00	3		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	946.001		
PPLOT	111.00	108.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	947.001		
**	NORTH 111.00 / WEST 111.00															
UNIT	111.00	111.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZ				830.000		
UNIT	111.00	111.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				830.000		
UNIT	111.00	111.00	2		4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				830.000		
UNIT	111.00	111.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZITE				830.000		
UNIT	111.00	111.00	2		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				830.000		
UNIT	111.00	111.00	2		2	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				830.000		
UNIT	111.00	111.00	2		1	CER	VESSEL	(SHERDLET)						830.000		
UNIT	111.00	111.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				830.000		
UNIT	111.00	111.00	2		1	LITH	OTHER	UNMODIFIED		SANDSTONE				830.000		N
UNIT	111.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	830.002		
UNIT	111.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	830.003		
UNIT	111.00	111.00	2		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	830.004		
PPLOT	111.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	831.001		
PPLOT	111.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	832.001		
PPLOT	111.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	833.001		
PPLOT	111.00	111.00	2		1	CER	VESSEL	SANDSTONE-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	834.001		
PPLOT	111.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	835.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	836.001		
PPLOT	111.00	111.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			42			837.000		Y
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	838.001		
PPLOT	111.00	111.00	2	1 CER	VESSEL	SANDSTONE-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	839.001		
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	840.001		
PPLOT	111.00	111.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZ				841.000		
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	842.001		
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	843.001		
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	844.001		
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	845.001		
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	846.001		
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	847.001		
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	848.001		
PPLOT	111.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	849.001		
PPLOT	111.00	111.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			26			850.000		Y
PPLOT	111.00	111.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			9			851.000		Y
UNIT	111.00	111.00	3	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				885.000		
UNIT	111.00	111.00	3	1 CER	VESSEL	(SHERDLET)						885.000		
PPLOT	111.00	111.00	3	1 LITH	OTHER	UNMODIFIED		FERRG SNDS				886.000		N
PPLOT	111.00	111.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			31			887.000		Y
PPLOT	111.00	111.00	3	1 CER	VESSEL	SANDSTONE-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	888.001		
PPLOT	111.00	111.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			10			889.000		Y
PPLOT	111.00	111.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			24			890.000		Y
**	NORTH 111.00 / WEST 112.00													
UNIT	111.00	112.00	2	2 LITH	OTHER	FIRE-CRACKED ROCK			2			852.000		Y
UNIT	111.00	112.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZ				852.000		
UNIT	111.00	112.00	2	2 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				852.000		
UNIT	111.00	112.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE	MOT YEL	CHERT				852.000		
UNIT	111.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	852.001		
UNIT	111.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	852.002		
UNIT	111.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	852.003		
UNIT	111.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	852.004		
PPLOT	111.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	853.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	854.001		
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	855.001		
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	856.001		
PPLOT	111.00	112.00	2		1	LITH	OTHER	UNMODIFIED		SANDSTONE				857.000		N
PPLOT	111.00	112.00	2		1	LITH	OTHER	UNMODIFIED		SANDSTONE				858.000		N
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	859.001		
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	860.001		
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	861.001		
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	862.001		
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	863.001		
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	864.001		
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	865.001		
PPLOT	111.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	866.001		
UNIT	111.00	112.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	891.001		
PPLOT	111.00	112.00	3		1	LITH	BIFACE	UNCLASSIFIABLE POINT		QUARTZ		MID-SEC		892.001		
PPLOT	111.00	112.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	893.001		
PPLOT	111.00	112.00	3		1	LITH	OTHER	UNMODIFIED		FERRG SNDS				894.000		N
PPLOT	111.00	112.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			4			895.000		Y
PPLOT	111.00	112.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			18			896.000		Y
**	NORTH 112.00 / WEST 107.00															
UNIT	112.00	107.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZ				907.000		
UNIT	112.00	107.00	2		4	CER	VESSEL	(SHERDLET)						907.000		
UNIT	112.00	107.00	2		1	HIST	OTHER	UNDETERMINED						907.000		N
UNIT	112.00	107.00	2		1	HIST	GLASS	UNDETERMINED						907.000		N
UNIT	112.00	107.00	2		2	LITH	OTHER	FIRE-CRACKED ROCK			24			907.000		Y
UNIT	112.00	107.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				907.000		
UNIT	112.00	107.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	907.001		
UNIT	112.00	107.00	2		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				907.002		
PPLOT	112.00	107.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	908.001		
PPLOT	112.00	107.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			2			909.000		Y
UNIT	112.00	107.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				925.000		
UNIT	112.00	107.00	3		1	CER	VESSEL	(SHERDLET)						925.000		
UNIT	112.00	107.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZ				925.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	112.00	107.00	3	4	LITH	OTHER	FIRE-CRACKED ROCK			10			925.000		Y
UNIT	112.00	107.00	3	1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	925.001		
UNIT	112.00	107.00	3	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	925.002		
PPLOT	112.00	107.00	3	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		RIM	UNDET DEC	926.001		
PPLOT	112.00	107.00	3	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	927.001		
PPLOT	112.00	107.00	3	1	LITH	OTHER	UNMODIFIED		RED OCHRE				928.000		N
PPLOT	112.00	107.00	3	1	CER	VESSEL	STEATITE-TEMPERED		CORD-SURF		BODY	UNDECOR	929.001		
PPLOT	112.00	107.00	3	1	LITH	OTHER	UNMODIFIED						930.000		N
PPLOT	112.00	107.00	3	1	LITH	OTHER	FIRE-CRACKED ROCK			75			931.000		Y
**	NORTH 112.00 / WEST 108.00														
UNIT	112.00	108.00	1	6	HIST	NAIL	MODERN						897.000		Y
UNIT	112.00	108.00	1	1	CER	VESSEL	(SHERDLET)						897.000		
UNIT	112.00	108.00	1	1	LITH	DEBITAGE	PRIMARY FLAKE	LT GRN	CHERT				897.000		
UNIT	112.00	108.00	1	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				897.000		
UNIT	112.00	108.00	1	1	HIST	METAL	MODERN						897.000		Y
UNIT	112.00	108.00	1	2	HIST	OTHER	MODERN						897.000		Y
UNIT	112.00	108.00	1	3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				897.000		
UNIT	112.00	108.00	1	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				897.000		
UNIT	112.00	108.00	1	27	HIST	GLASS	MODERN						897.000		Y
UNIT	112.00	108.00	1	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	897.001		
UNIT	112.00	108.00	1	1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	897.002		
UNIT	112.00	108.00	1	1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		BASE		897.003		
UNIT	112.00	108.00	1	1	HIST	GLASS	MODERN						898.000	Entire 2x2m sq.	Y
UNIT	112.00	108.00	1	1	HIST	METAL	MODERN						898.000	Entire 2x2m sq.	Y
UNIT	112.00	108.00	1	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				898.000	Entire 2x2m sq.	
UNIT	112.00	108.00	1	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				898.000	Entire 2x2m sq.	
UNIT	112.00	108.00	1	2	LITH	DEBITAGE	CHUNK		QUARTZ				898.000	Entire 2x2m sq.	
UNIT	112.00	108.00	1	3	HIST	OTHER	MODERN						898.000	Entire 2x2m sq.	Y
UNIT	112.00	108.00	2	3	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				899.000		
UNIT	112.00	108.00	2	1	HIST	NAIL	UNDETERMINED						899.000		N
UNIT	112.00	108.00	2	2	LITH	OTHER	FIRE-CRACKED ROCK			1			899.000		Y
UNIT	112.00	108.00	2	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				899.000		
UNIT	112.00	108.00	2	1	LITH	DEBITAGE	SECONDARY FLAKE	MED BRN	CHERT				899.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	112.00	108.00	2		1	CER	VESSEL	(SHERDLET)						899.000		
UNIT	112.00	108.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				899.000		
UNIT	112.00	108.00	2		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				899.000		
UNIT	112.00	108.00	2		3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				899.000		
UNIT	112.00	108.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				899.000		
UNIT	112.00	108.00	2		4	LITH	DEBITAGE	MICROFLAKE		QUARTZ				899.000		
UNIT	112.00	108.00	2		5	HIST	GLASS	UNDETERMINED						899.000		N
UNIT	112.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	899.001		
UNIT	112.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	899.002		
UNIT	112.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	899.003		
UNIT	112.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	899.004		
UNIT	112.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	899.005		
UNIT	112.00	108.00	2		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				899.006		
PPLOT	112.00	108.00	2		1	LITH	BIFACE	STAGE 1 BIFACE		QUARTZ		BASE		900.001		
PPLOT	112.00	108.00	2		1	HIST	GLASS	UNDETERMINED						901.000		N
PPLOT	112.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	902.001		
PPLOT	112.00	108.00	2		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	903.001		
PPLOT	112.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	904.001		
PPLOT	112.00	108.00	2		3	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	905.001		
PPLOT	112.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	906.001		
UNIT	112.00	108.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				919.000		
UNIT	112.00	108.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				919.000		
UNIT	112.00	108.00	3		3	LITH	DEBITAGE	MICROFLAKE		QUARTZ				919.000		
UNIT	112.00	108.00	3		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				919.000		
UNIT	112.00	108.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				919.000		
UNIT	112.00	108.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				919.000		
UNIT	112.00	108.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				919.000		
UNIT	112.00	108.00	3		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				919.000		
UNIT	112.00	108.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	919.001		
PPLOT	112.00	108.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			12			920.000		Y
PPLOT	112.00	108.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			2			921.000		Y
PPLOT	112.00	108.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			21			922.000		Y
PPLOT	112.00	108.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			28			923.000		Y
PPLOT	112.00	108.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		RIM	UNDET DEC	924.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	112.00	108.00	4	3 LITH	DEBITAGE	MICROFLAKE		QUARTZ				948.000		
UNIT	112.00	108.00	4	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				948.000		
UNIT	112.00	108.00	4	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				948.000		
UNIT	112.00	108.00	4	1 CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	948.001		
PPLOT	112.00	108.00	4	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	949.001		
PPLOT	112.00	108.00	4	1 LITH	OTHER	FIRE-CRACKED ROCK			9			950.000		Y
**	NORTH 112.00 / WEST 111.00													
UNIT	112.00	111.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				808.000		
UNIT	112.00	111.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				808.000		
UNIT	112.00	111.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				808.000		
UNIT	112.00	111.00	2	3 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				808.000		
UNIT	112.00	111.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE	BAN YEL	CHERT				808.000		
UNIT	112.00	111.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE	DRK GRY	CHERT				808.000		
UNIT	112.00	111.00	2	3 LITH	DEBITAGE	CHUNK		QUARTZITE				808.000		
UNIT	112.00	111.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE	VARIE/T	CHERT				808.000		
UNIT	112.00	111.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				808.000		
UNIT	112.00	111.00	2	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	808.001		
UNIT	112.00	111.00	2	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	808.002		
UNIT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	808.003		
UNIT	112.00	111.00	2	1 CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	808.004		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	809.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	810.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	811.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	812.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	813.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	814.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	815.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	816.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	817.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	818.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	819.001		
PPLOT	112.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	820.001		
PPLOT	112.00	111.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			252			821.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	112.00	111.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			12			822.000		Y
PPLOT	112.00	111.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			29			823.000		Y
PPLOT	112.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	824.001		
PPLOT	112.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	825.001		
PPLOT	112.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	826.001		
PPLOT	112.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	827.001		
PPLOT	112.00	111.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			11			828.000		Y
PPLOT	112.00	111.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			25			829.000		Y
UNIT	112.00	111.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				875.000		
UNIT	112.00	111.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				875.000		
UNIT	112.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			1			875.000		Y
UNIT	112.00	111.00	3		1	LITH	UNIFACE	END SCRAPER		QUARTZ		WHOLE		875.001		
PPLOT	112.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			29			876.000		Y
PPLOT	112.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			10			877.000		Y
PPLOT	112.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			50			878.000		Y
PPLOT	112.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			20			879.000		Y
PPLOT	112.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			26			880.000		Y
PPLOT	112.00	111.00	3		1	LITH	BIFACE	STAGE 2 BIFACE		QUARTZITE		FRAG		881.001		
**	NORTH	112.00 / WEST	112.00													
UNIT	112.00	112.00	1		3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				783.000		
UNIT	112.00	112.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				783.000		
UNIT	112.00	112.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				783.000		
UNIT	112.00	112.00	1		7	HIST	GLASS	MODERN						783.000		Y
UNIT	112.00	112.00	1		3	HIST	OTHER	MODERN						783.000		Y
UNIT	112.00	112.00	1		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				783.000		
UNIT	112.00	112.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				783.000		
UNIT	112.00	112.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK RED	CHERT				783.000		
UNIT	112.00	112.00	1		6	CER	VESSEL	(SHERDLET)						783.000		
UNIT	112.00	112.00	1		3	LITH	OTHER	FIRE-CRACKED ROCK			15			783.000		Y
UNIT	112.00	112.00	1		2	HIST	METAL	MODERN						783.000		Y
UNIT	112.00	112.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	783.001		
UNIT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	783.002		
UNIT	112.00	112.00	1		1	CER	VESSEL	SAND & STEATITE-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	783.003		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	783.004		
UNIT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	783.005		
UNIT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	783.006		
UNIT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		RIM	UNDET DEC	783.007		
UNIT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	783.008		
UNIT	112.00	112.00	1		1	CER	VESSEL	UNDETERMINED		UNCLAS-SURF		BODY	UNDET DEC	783.009		
PPLOT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	784.001		
PPLOT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	785.001		
PPLOT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	786.001		
PPLOT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	787.001		
PPLOT	112.00	112.00	1		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				788.000		
PPLOT	112.00	112.00	1		1	CER	VESSEL	SANDSTONE-TEMPERED		CORD-SURF		RIM	UNDECOR	789.001		
PPLOT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	790.001		
PPLOT	112.00	112.00	1		1	LITH	BIFACE	LANCEOLATE POINT		QUARTZ		WHOLE		791.001		
PPLOT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	792.001		
PPLOT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	793.001		
PPLOT	112.00	112.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				794.000		
UNIT	112.00	112.00	1		1	LITH	OTHER	FIRE-CRACKED ROCK			13			795.000	Entire 2x2m sq.	Y
UNIT	112.00	112.00	1		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				795.000	Entire 2x2m sq.	
UNIT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	795.001	Entire 2x2m sq.	
UNIT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	795.002	Entire 2x2m sq.	
UNIT	112.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	795.003	Entire 2x2m sq.	
UNIT	112.00	112.00	2		6	LITH	DEBITAGE	MICROFLAKE		QUARTZ				796.000		
UNIT	112.00	112.00	2		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				796.000		
UNIT	112.00	112.00	2		2	CER	VESSEL	(SHERDLET)						796.000		
UNIT	112.00	112.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				796.000		
UNIT	112.00	112.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				796.000		
UNIT	112.00	112.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				796.000		
UNIT	112.00	112.00	2		2	LITH	OTHER	FIRE-CRACKED ROCK			6			796.000		Y
UNIT	112.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	796.001		
PPLOT	112.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	797.001		
PPLOT	112.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	798.001		
PPLOT	112.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	799.001		
PPLOT	112.00	112.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK		FERRG SNDS				800.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	112.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	801.001		
PPLOT	112.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	802.001		
PPLOT	112.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	803.001		
PPLOT	112.00	112.00	2	1 CER	VESSEL	SANDSTONE-TEMPERED		CORD-SURF		BODY	UNDECOR	804.001		
PPLOT	112.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	805.001		
PPLOT	112.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	806.001		
PPLOT	112.00	112.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	807.001		
UNIT	112.00	112.00	3	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				867.000		
UNIT	112.00	112.00	3	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				867.000		
UNIT	112.00	112.00	3	2 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				867.000		
UNIT	112.00	112.00	3	1 LITH	DEBITAGE	MICROFLAKE		QUARTZ				867.000		
UNIT	112.00	112.00	3	1 CER	VESSEL	(SHERDLET)						867.000		
UNIT	112.00	112.00	3	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				867.000		
UNIT	112.00	112.00	3	1 FAUN	BONE	WORKED				FRAG	BURNED	867.000		
UNIT	112.00	112.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			9			867.000		Y
UNIT	112.00	112.00	3	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				867.000		
UNIT	112.00	112.00	3	1 LITH	UNIFACE	UNCLASSIFIABLE SCRAPER		QUARTZ		FRAG		867.001		
PPLOT	112.00	112.00	3	1 LITH	USE-MODI	EDGE BATTERED HAMMERSTONE		GREENSTONE		FRAG		868.001		
PPLOT	112.00	112.00	3	1 LITH	BIFACE	LANCEOLATE POINT		QUARTZ		WHOLE		869.001		
PPLOT	112.00	112.00	3	1 LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				870.001		
PPLOT	112.00	112.00	3	3 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	871.001		
PPLOT	112.00	112.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	14			872.000		N
PPLOT	112.00	112.00	3	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				873.001		
PPLOT	112.00	112.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK		QUARTZITE	36			874.000		N
PPLOT	112.00	112.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			28			882.000		Y
PPLOT	112.00	112.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			69			883.000		Y
PPLOT	112.00	112.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			42			884.000		Y
**	NORTH 115.00 / WEST 107.00													
UNIT	115.00	107.00	1	2 HIST	CERAMIC	MODERN						763.000		Y
UNIT	115.00	107.00	1	4 HIST	GLASS	MODERN						763.000		Y
UNIT	115.00	107.00	1	1 HIST	OTHER	MODERN						763.000		Y
UNIT	115.00	107.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZ				773.000		
UNIT	115.00	107.00	2	3 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				773.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	115.00	107.00	2		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				773.000		
UNIT	115.00	107.00	2		5	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				773.000		
UNIT	115.00	107.00	2		4	LITH	OTHER	FIRE-CRACKED ROCK			58			773.000		Y
UNIT	115.00	107.00	2		9	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				773.000		
UNIT	115.00	107.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	773.001		
UNIT	115.00	107.00	2		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	773.002		
PPLOT	115.00	107.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	774.001		
PPLOT	115.00	107.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	775.001		
PPLOT	115.00	107.00	2		1	CER	VESSEL	(SHERDLET)					UNDETER	776.000		
PPLOT	115.00	107.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	777.001		
**	NORTH 115.00 / WEST 108.00															
UNIT	115.00	108.00	1		2	HIST	OTHER	MODERN						764.000		Y
UNIT	115.00	108.00	1		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				764.000		
UNIT	115.00	108.00	1		1	HIST	CERAMIC	MODERN						764.000		Y
UNIT	115.00	108.00	1		1	CER	VESSEL	QUARTZ & SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	764.001		
UNIT	115.00	108.00	2		1	HIST	METAL	MODERN						778.000		N
UNIT	115.00	108.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				778.000		
UNIT	115.00	108.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				778.000		
UNIT	115.00	108.00	2		4	LITH	OTHER	FIRE-CRACKED ROCK			140			778.000		Y
UNIT	115.00	108.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				778.000		
UNIT	115.00	108.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				778.000		
UNIT	115.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	778.001		
UNIT	115.00	108.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		RIM	UNDECOR	778.002		
UNIT	115.00	108.00	2		1	LITH	UNIFACE	RETOUCHED PRIMARY FLAKE	CRM/WHT	CHERT		WHOLE		778.003		
PPLOT	115.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	779.000		
PPLOT	115.00	108.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	780.000		
**	NORTH 116.00 / WEST 107.00															
UNIT	116.00	107.00	1		3	HIST	GLASS	MODERN						762.000		Y
UNIT	116.00	107.00	1		3	HIST	CERAMIC	MODERN						762.000		Y
UNIT	116.00	107.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				762.000		
UNIT	116.00	107.00	1		4	HIST	OTHER	MODERN						762.000		Y
UNIT	116.00	107.00	1		1	LITH	OTHER	FIRE-CRACKED ROCK			99			762.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	116.00	107.00	2		3	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				769.000		
UNIT	116.00	107.00	2		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				769.000		
UNIT	116.00	107.00	2		6	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				769.000		
UNIT	116.00	107.00	2		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				769.000		
UNIT	116.00	107.00	2		3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				769.000		
UNIT	116.00	107.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	769.001		
UNIT	116.00	107.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			30			770.000	Mole burrow	Y
UNIT	116.00	107.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				770.000	Mole burrow	
UNIT	116.00	107.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				770.000	Mole burrow	
PPLOT	116.00	107.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	771.001		
PPLOT	116.00	107.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			81			772.000		Y
**	NORTH 116.00 / WEST 108.00															
UNIT	116.00	108.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE	CRM/WHT	CHERT				760.000		
UNIT	116.00	108.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK RED	CHERT				760.000		
UNIT	116.00	108.00	1		1	LITH	DEBITAGE	DECORTICATION FLAKE		RHYOLITE				760.000		
UNIT	116.00	108.00	1		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				760.000		
UNIT	116.00	108.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				760.000		
UNIT	116.00	108.00	1		10	HIST	OTHER	MODERN						760.000		Y
UNIT	116.00	108.00	1		1	HIST	NAIL	MODERN						760.000		Y
UNIT	116.00	108.00	1		1	LITH	DEBITAGE	CHUNK		QUARTZITE				760.000		
UNIT	116.00	108.00	1		20	HIST	GLASS	MODERN						760.000		Y
UNIT	116.00	108.00	1		3	LITH	DEBITAGE	CHUNK		QUARTZ				760.000		
UNIT	116.00	108.00	1		5	HIST	METAL	MODERN						760.000		Y
UNIT	116.00	108.00	1		4	HIST	CERAMIC	MODERN						760.000		Y
UNIT	116.00	108.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				760.000		
UNIT	116.00	108.00	1		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				760.000		
UNIT	116.00	108.00	1		1	LITH	BIFACE	UNCLASSIFIABLE POINT		QUARTZITE		BASE		760.001		
UNIT	116.00	108.00	1		1	LITH	BIFACE	STAGE 1 BIFACE		QUARTZ		MID-SEC		760.002		
UNIT	116.00	108.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	760.003		
UNIT	116.00	108.00	1		1	LITH	UNIFACE	RETOUCHED SECONDARY FLAKE		QUARTZ		WHOLE		760.004		
UNIT	116.00	108.00	1		1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		FRAG		761.001	Backdirt near unit	
UNIT	116.00	108.00	2		3	LITH	DEBITAGE	MICROFLAKE		QUARTZ				765.000		
UNIT	116.00	108.00	2		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				765.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	116.00	108.00	2	5 LITH	OTHER	FIRE-CRACKED ROCK			187			765.000		Y
UNIT	116.00	108.00	2	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				765.000		
UNIT	116.00	108.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				765.000		
PPLOT	116.00	108.00	2	1 LITH	BIFACE	STRAIGHT-STEMMED POINT		QUARTZITE		WHOLE		766.001		
PPLOT	116.00	108.00	2	1 CER	VESSEL	(SHERDLET)						767.000		
PPLOT	116.00	108.00	2	1 LITH	BIFACE	CONTRACTING-STEMMED POINT		QUARTZ		BASE		768.001		
UNIT	116.00	108.00	3	3 LITH	DEBITAGE	MICROFLAKE		QUARTZ				781.000	Flood damage 12/2	
UNIT	116.00	108.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	INCISED	781.001	Flood damage 12/2	
UNIT	116.00	108.00	3	2 LITH	OTHER	FIRE-CRACKED ROCK			25			782.000		Y
UNIT	116.00	108.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	782.000		
**	NORTH 117.00 / WEST 99.00													
UNIT	117.00	99.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				724.000		
UNIT	117.00	99.00	2	4 CER	VESSEL	(SHERDLET)						724.000		
UNIT	117.00	99.00	2	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				724.000		
UNIT	117.00	99.00	2	3 LITH	OTHER	FIRE-CRACKED ROCK			8			724.000		Y
UNIT	117.00	99.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				724.000		
UNIT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	724.001		
UNIT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	724.002		
UNIT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	724.003		
UNIT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	724.004		
UNIT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	724.005		
UNIT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	724.006		
UNIT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	724.007		
PPLOT	117.00	99.00	2	1 LITH	OTHER	UNMODIFIED		LIMONITE				725.000		N
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	726.001		
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	727.001		
PPLOT	117.00	99.00	2	1 LITH	OTHER	UNMODIFIED		LIMONITE				728.000		N
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	729.001		
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	730.001		
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	731.001		
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	732.001		
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	733.001		
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	734.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	735.001		
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	736.001		
PPLOT	117.00	99.00	2	1 LITH	BIFACE	STRAIGHT-STEMMED POINT		RHYOLITE		FRAG		737.001		
PPLOT	117.00	99.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	738.001		
UNIT	117.00	99.00	3	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				755.000		
UNIT	117.00	99.00	3	5 LITH	OTHER	FIRE-CRACKED ROCK			128			755.000		Y
UNIT	117.00	99.00	3	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				755.000		
UNIT	117.00	99.00	3	3 CER	VESSEL	(SHERDLET)						755.000		
PPLOT	117.00	99.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	756.000		
**	NORTH 117.00 / WEST 100.00													
UNIT	117.00	100.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				739.000		
UNIT	117.00	100.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZ				739.000		
UNIT	117.00	100.00	2	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				739.000		
UNIT	117.00	100.00	2	3 CER	VESSEL	(SHERDLET)						739.000		
UNIT	117.00	100.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				739.000		
UNIT	117.00	100.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				739.000		
UNIT	117.00	100.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				739.000		
UNIT	117.00	100.00	2	3 LITH	OTHER	FIRE-CRACKED ROCK			22			739.000		Y
UNIT	117.00	100.00	2	1 CER	VESSEL	SAND-TEMPERED		SMOOTH-SURF		UNKNOWN	UNDECOR	739.001		
PPLOT	117.00	100.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			52			740.000		Y
PPLOT	117.00	100.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	741.001		
PPLOT	117.00	100.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	742.001		
PPLOT	117.00	100.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	743.001		
PPLOT	117.00	100.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	744.001		
PPLOT	117.00	100.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				745.000		
PPLOT	117.00	100.00	2	1 LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZ				746.001		
PPLOT	117.00	100.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	747.001		
UNIT	117.00	100.00	3	3 LITH	OTHER	FIRE-CRACKED ROCK			56			757.000		Y
UNIT	117.00	100.00	3	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				757.000		
UNIT	117.00	100.00	3	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				757.000		
UNIT	117.00	100.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	757.001		
UNIT	117.00	100.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	757.002		
UNIT	117.00	100.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	757.003		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	117.00	100.00	3	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				757.004		
**	NORTH 117.00 / WEST 111.00													
UNIT	117.00	111.00	2	1 CER	VESSEL	(SHERDLET)						675.000		
UNIT	117.00	111.00	2	3 FAUN	BONE	WORKED				FRAG	BURNED	675.000		
UNIT	117.00	111.00	2	6 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				675.000		
UNIT	117.00	111.00	2	6 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				675.000		
UNIT	117.00	111.00	2	2 LITH	OTHER	FIRE-CRACKED ROCK			18			675.000		Y
UNIT	117.00	111.00	2	4 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				675.000		
UNIT	117.00	111.00	2	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				675.000		
UNIT	117.00	111.00	2	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		LATERAL		675.001		
PPLOT	117.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	676.001		
PPLOT	117.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	677.001		
PPLOT	117.00	111.00	2	1 LITH	BIFACE	STAGE 2 BIFACE		QUARTZ		WHOLE		678.001		
PPLOT	117.00	111.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			42			679.000		Y
PPLOT	117.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	679.001		
PPLOT	117.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	680.001		
PPLOT	117.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	681.001		
PPLOT	117.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	682.001		
PPLOT	117.00	111.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			75			683.000		Y
PPLOT	117.00	111.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			52			684.000		Y
PPLOT	117.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	685.001		
UNIT	117.00	111.00	3	1 HIST	NAIL	UNDETERMINED						701.000		N
UNIT	117.00	111.00	3	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				701.000		
UNIT	117.00	111.00	3	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				701.000		
PPLOT	117.00	111.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	702.001		
PPLOT	117.00	111.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BASE	UNDECOR	703.001		
**	NORTH 117.00 / WEST 112.00													
UNIT	117.00	112.00	2	5 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				686.000		
UNIT	117.00	112.00	2	9 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				686.000		
UNIT	117.00	112.00	2	2 CER	VESSEL	(SHERDLET)						686.000		
UNIT	117.00	112.00	2	2 LITH	OTHER	FIRE-CRACKED ROCK			5			686.000		Y
UNIT	117.00	112.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				686.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	117.00	112.00	2		3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				686.000		
UNIT	117.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	686.001		
UNIT	117.00	112.00	2		1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		LATERAL		686.002		
PPLOT	117.00	112.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				687.000		
PPLOT	117.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	688.001		
PPLOT	117.00	112.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				689.000		
PPLOT	117.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		RIM	UNDET DEC	690.001		
PPLOT	117.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	691.001		
UNIT	117.00	112.00	3		3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				704.000		
UNIT	117.00	112.00	3		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				704.000		
UNIT	117.00	112.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZ				704.000		
UNIT	117.00	112.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			1			704.000		Y
UNIT	117.00	112.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				704.000		
UNIT	117.00	112.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				704.000		
UNIT	117.00	112.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				704.000		
PPLOT	117.00	112.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	705.001		
**	NORTH	118.00 / WEST	99.00													
UNIT	118.00	99.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				713.000		
UNIT	118.00	99.00	2		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				713.000		
UNIT	118.00	99.00	2		1	HIST	GLASS	UNDETERMINED						713.000		N
UNIT	118.00	99.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	CORD-DECOR	713.001		
UNIT	118.00	99.00	2		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				713.002		
PPLOT	118.00	99.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	714.001		
PPLOT	118.00	99.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	715.001		
PPLOT	118.00	99.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			3			716.000		Y
PPLOT	118.00	99.00	2		2	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	CORD-DECOR	717.001		
PPLOT	118.00	99.00	2		1	LITH	OTHER	UNMODIFIED		LIMONITE				718.000		N
PPLOT	118.00	99.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	719.001		
PPLOT	118.00	99.00	2		1	LITH	OTHER	UNMODIFIED		LIMONITE				720.000		N
PPLOT	118.00	99.00	2		2	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	721.001		
PPLOT	118.00	99.00	2		1	LITH	OTHER	UNMODIFIED		LIMONITE				722.000		N
PPLOT	118.00	99.00	2		1	LITH	BIFACE	TRIANGULAR POINT		RHYOLITE		BASE		723.001		
UNIT	118.00	99.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZ				752.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	118.00	99.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				752.000		
UNIT	118.00	99.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			29			752.000		Y
UNIT	118.00	99.00	3		1	LITH	OTHER	UNMODIFIED		LIMONITE				752.000		N
UNIT	118.00	99.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	752.001		
UNIT	118.00	99.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	752.002		
PPLOT	118.00	99.00	3		1	LITH	USE-MODI	CORE/HAMMERSTONE		QUARTZITE		FRAG		753.001		
PPLOT	118.00	99.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	754.001		
**	NORTH 118.00 / WEST 100.00															
UNIT	118.00	100.00	1		19	HIST	GLASS	MODERN						706.000		Y
UNIT	118.00	100.00	1		3	HIST	CERAMIC	MODERN						706.000		Y
UNIT	118.00	100.00	1		2	HIST	METAL	MODERN						706.000		Y
UNIT	118.00	100.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				706.000		
UNIT	118.00	100.00	1		4	HIST	OTHER	MODERN						706.000		Y
UNIT	118.00	100.00	1		1	LITH	DEBITAGE	CHUNK		QUARTZITE				706.000		
UNIT	118.00	100.00	1		1	CER	VESSEL	(SHERDLET)						706.000		
UNIT	118.00	100.00	1		1	LITH	DEBITAGE	BIPOLAR CORE		IGNEOUS				706.001		
UNIT	118.00	100.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	706.002		
UNIT	118.00	100.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	706.003		
UNIT	118.00	100.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	706.004		
UNIT	118.00	100.00	1		1	LITH	BIFACE	LANCEOLATE POINT		QUARTZ		BASE		707.001	Disturbed context	
UNIT	118.00	100.00	2		2	LITH	OTHER	FIRE-CRACKED ROCK			8			708.000		Y
UNIT	118.00	100.00	2		3	LITH	DEBITAGE	MICROFLAKE		QUARTZ				708.000		
UNIT	118.00	100.00	2		2	CER	VESSEL	(SHERDLET)						708.000		
UNIT	118.00	100.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				708.000		
UNIT	118.00	100.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	708.001		
UNIT	118.00	100.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	708.002		
PPLOT	118.00	100.00	2		1	LITH	BIFACE	STRAIGHT-STEMMED POINT		QUARTZITE		WHOLE		709.001		
PPLOT	118.00	100.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	710.001		
PPLOT	118.00	100.00	2		3	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	711.001		
PPLOT	118.00	100.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	712.001		
UNIT	118.00	100.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				748.000		
UNIT	118.00	100.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				748.000		
UNIT	118.00	100.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				748.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	118.00	100.00	3		1	FAUN	BONE	UNDETERMINED				FRAG	BURNED	748.000		
UNIT	118.00	100.00	3		5	LITH	OTHER	FIRE-CRACKED ROCK			138			748.000		Y
UNIT	118.00	100.00	3		1	LITH	BIFACE	UNCLASSIFIABLE POINT		QUARTZ		FRAG		748.001		
PPLOT	118.00	100.00	3		1	LITH	USE-MODI	EDGE/CENTER BATTRD HAMMERSTO		QUARTZITE		WHOLE		749.001		
PPLOT	118.00	100.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	750.001		
PPLOT	118.00	100.00	3		2	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	751.001		
UNIT	118.00	100.00	4		2	LITH	DEBITAGE	MICROFLAKE		QUARTZ				758.000		
UNIT	118.00	100.00	4		1	CER	VESSEL	QUARTZ & LIMESTONE-TEMPERED						758.000		
UNIT	118.00	100.00	4		3	LITH	OTHER	FIRE-CRACKED ROCK			55			758.000		Y
**	NORTH 118.00 / WEST 111.00															
UNIT	118.00	111.00	1		1	LITH	BIFACE	STAGE 1 BIFACE		QUARTZ		FRAG		666.001		
UNIT	118.00	111.00	2		2	HIST	NAIL	UNDETERMINED						670.000		N
UNIT	118.00	111.00	2		1	CER	VESSEL	(SHERDLET)						670.000		
UNIT	118.00	111.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				670.000		
UNIT	118.00	111.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE	CREAM	CHERT				670.000		
UNIT	118.00	111.00	2		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				670.000		
UNIT	118.00	111.00	2		1	FAUN	BONE	WORKED				FRAG	BURNED	670.000		
UNIT	118.00	111.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				670.000		
UNIT	118.00	111.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				670.000		
UNIT	118.00	111.00	2		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				670.000		
UNIT	118.00	111.00	2		1	LITH	DEBITAGE	CHUNK	LT GRY	CHERT				670.000		
UNIT	118.00	111.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			4			670.000		Y
UNIT	118.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	670.001		
UNIT	118.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	670.002		
PPLOT	118.00	111.00	2		1	LITH	BIFACE	LANCEOLATE POINT		QUARTZ		WHOLE		671.001		
PPLOT	118.00	111.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	672.001		
PPLOT	118.00	111.00	2		1	LITH	OTHER	UNMODIFIED						673.000		Y
PPLOT	118.00	111.00	2		1	LITH	OTHER	UNMODIFIED						674.000		Y
UNIT	118.00	111.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				698.000		
UNIT	118.00	111.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				698.000		
UNIT	118.00	111.00	3		1	FAUN	BONE	WORKED				FRAG	BURNED	698.000		
UNIT	118.00	111.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				698.000		
UNIT	118.00	111.00	3		1	HIST	GLASS	UNDETERMINED						698.000		N

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	118.00	111.00	3	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		BASE		698.001		
PPLOT	118.00	111.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			10			699.000		Y
PPLOT	118.00	111.00	3	1 LITH	UNIFACE	RETOUCHED CORE		QUARTZ		WHOLE		700.001		
**	NORTH 118.00 / WEST 112.00													
UNIT	118.00	112.00	1	2 LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				665.000		
UNIT	118.00	112.00	1	2 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				665.000		
UNIT	118.00	112.00	1	5 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				665.000		
UNIT	118.00	112.00	1	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				665.000		
UNIT	118.00	112.00	1	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				665.000		
UNIT	118.00	112.00	1	5 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				665.000		
UNIT	118.00	112.00	1	3 HIST	OTHER	MODERN						665.000		Y
UNIT	118.00	112.00	1	1 HIST	METAL	MODERN						665.000		Y
UNIT	118.00	112.00	1	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				665.000		
UNIT	118.00	112.00	1	1 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				665.000		
UNIT	118.00	112.00	1	35 HIST	GLASS	MODERN						665.000		Y
UNIT	118.00	112.00	1	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				665.000		
UNIT	118.00	112.00	1	2 LITH	OTHER	FIRE-CRACKED ROCK			12			665.000		Y
UNIT	118.00	112.00	1	5 HIST	NAIL	MODERN						665.000		Y
UNIT	118.00	112.00	1	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				665.001		
UNIT	118.00	112.00	1	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	665.002		
UNIT	118.00	112.00	1	1 CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	665.003		
UNIT	118.00	112.00	1	1 CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		RIM	UNDET DEC	665.004		
UNIT	118.00	112.00	1	1 CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	665.005		
UNIT	118.00	112.00	1	1 CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	665.006		
UNIT	118.00	112.00	1	1 LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZ				665.007		
UNIT	118.00	112.00	1	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		MID-SEC		665.008		
UNIT	118.00	112.00	1	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				665.009		
UNIT	118.00	112.00	1	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				665.010		
UNIT	118.00	112.00	2	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				667.000		
UNIT	118.00	112.00	2	1 CER	VESSEL	(SHERDLET)						667.000		
UNIT	118.00	112.00	2	4 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				667.000		
UNIT	118.00	112.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				667.000		
UNIT	118.00	112.00	2	3 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				667.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	118.00	112.00	2	5 LITH	OTHER	FIRE-CRACKED ROCK			75			667.000		Y
UNIT	118.00	112.00	2	5 LITH	DEBITAGE	MICROFLAKE		QUARTZ				667.000		
UNIT	118.00	112.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			1			667.000		Y
UNIT	118.00	112.00	2	4 FAUN	BONE	UNDETERMINED				FRAG	BURNED	667.000		
UNIT	118.00	112.00	2	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		TIP		667.001		
PPLOT	118.00	112.00	2	1 LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZ				668.001		
PPLOT	118.00	112.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				669.000		
UNIT	118.00	112.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			4			692.000		Y
UNIT	118.00	112.00	3	2 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				692.000		
UNIT	118.00	112.00	3	6 LITH	DEBITAGE	MICROFLAKE		QUARTZ				692.000		
PPLOT	118.00	112.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			4			693.000		Y
PPLOT	118.00	112.00	3	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				694.001		
PPLOT	118.00	112.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			17			695.000		Y
PPLOT	118.00	112.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			20			696.000		Y
PPLOT	118.00	112.00	3	1 LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZ				697.001		
**	NORTH 123.00 / WEST 109.00													
UNIT	123.00	109.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				631.000		
UNIT	123.00	109.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				631.000		
UNIT	123.00	109.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				631.000		
UNIT	123.00	109.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				631.000		
UNIT	123.00	109.00	2	1 CER	VESSEL	(SHERDLET)						631.000		
UNIT	123.00	109.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE	BLACK	CHERT				631.000		
UNIT	123.00	109.00	2	5 LITH	OTHER	FIRE-CRACKED ROCK			79			631.000		Y
PPLOT	123.00	109.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			58			632.000		Y
PPLOT	123.00	109.00	2	1 LITH	OTHER	UNMODIFIED						633.000		Y
PPLOT	123.00	109.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				634.000		
PPLOT	123.00	109.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				635.000		
PPLOT	123.00	109.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			4			636.000		Y
UNIT	123.00	109.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK		FERRG SNDS	42			647.000		N
UNIT	123.00	109.00	3	11 LITH	OTHER	FIRE-CRACKED ROCK			47			647.000		Y
UNIT	123.00	109.00	3	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				647.000		
PPLOT	123.00	109.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			30			648.000		Y
PPLOT	123.00	109.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			19			649.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	123.00	109.00	3	1	LITH	OTHER	UNMODIFIED						650.000		Y
PPLOT	123.00	109.00	3	1	LITH	OTHER	FIRE-CRACKED ROCK			13			651.000		Y
PPLOT	123.00	109.00	3	1	LITH	OTHER	UNMODIFIED						652.000		Y
PPLOT	123.00	109.00	3	1	LITH	OTHER	FIRE-CRACKED ROCK			42			653.000		Y
PPLOT	123.00	109.00	3	1	LITH	OTHER	UNMODIFIED						654.000		Y
**	NORTH 123.00 / WEST 110.00														
UNIT	123.00	110.00	2	2	LITH	OTHER	FIRE-CRACKED ROCK			43			637.000		Y
UNIT	123.00	110.00	2	1	LITH	DEBITAGE	SECONDARY FLAKE	DRK RED	CHERT				637.000		
PPLOT	123.00	110.00	2	1	CER	VESSEL	(SHERDLET)					UNDETER	638.000		
PPLOT	123.00	110.00	2	1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	639.000		
UNIT	123.00	110.00	3	1	LITH	OTHER	FIRE-CRACKED ROCK		FERRG SNDS	18			655.000		N
UNIT	123.00	110.00	3	2	LITH	OTHER	FIRE-CRACKED ROCK			7			655.000		Y
UNIT	123.00	110.00	3	1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				655.000		
UNIT	123.00	110.00	3	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				655.000		
UNIT	123.00	110.00	3	2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				655.000		
UNIT	123.00	110.00	3	1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		TIP		655.001		
UNIT	123.00	110.00	3	1	LITH	BIFACE	UNCLASSIFIABLE BIFACE	DRK GRY	CHERT		FRAG		655.003		
PPLOT	123.00	110.00	3	1	LITH	OTHER	FIRE-CRACKED ROCK			9			656.000		Y
PPLOT	123.00	110.00	3	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	657.001		
PPLOT	123.00	110.00	3	1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	658.001		
PPLOT	123.00	110.00	3	1	LITH	OTHER	FIRE-CRACKED ROCK			67			659.000		Y
PPLOT	123.00	110.00	3	1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				660.000		
PPLOT	123.00	110.00	3	1	LITH	OTHER	FIRE-CRACKED ROCK			24			661.000		Y
**	NORTH 123.00 / WEST 115.00														
UNIT	123.00	115.00	1	2	LITH	OTHER	FIRE-CRACKED ROCK			118			597.000		Y
UNIT	123.00	115.00	1	1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				597.000		
PPLOT	123.00	115.00	1	1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDET DEC	598.000		
**	NORTH 123.00 / WEST 116.00														
UNIT	123.00	116.00	2	3	LITH	DEBITAGE	CHUNK		QUARTZ				606.000		
PPLOT	123.00	116.00	2	1	LITH	OTHER	FIRE-CRACKED ROCK			67			607.000		Y
PPLOT	123.00	116.00	2	1	LITH	OTHER	FIRE-CRACKED ROCK			136			608.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	123.00	116.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			11			609.000		Y
PPLOT	123.00	116.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			17			610.000		Y
PPLOT	123.00	116.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			7			611.000		Y
PPLOT	123.00	116.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			4			612.000		Y
PPLOT	123.00	116.00	2		1	LITH	OTHER	UNMODIFIED						613.000		N
PPLOT	123.00	116.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			18			614.000		Y
PPLOT	123.00	116.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			19			615.000		Y
PPLOT	123.00	116.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			27			616.000		Y
**	NORTH	124.00 / WEST	109.00													
PPLOT	124.00	109.00	1		3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				623.000		
PPLOT	124.00	109.00	1		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				623.000		
PPLOT	124.00	109.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				623.000		
PPLOT	124.00	109.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				623.000		
PPLOT	124.00	109.00	1		3	LITH	OTHER	FIRE-CRACKED ROCK			42			623.000		Y
PPLOT	124.00	109.00	1		1	HIST	OTHER	MODERN						623.000		Y
PPLOT	124.00	109.00	1		1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		MID-SEC		623.001		
PPLOT	124.00	109.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	623.002		
PPLOT	124.00	109.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	623.003		
UNIT	124.00	109.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			1			626.000		Y
UNIT	124.00	109.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				626.000		
UNIT	124.00	109.00	2		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				626.000		
UNIT	124.00	109.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK YEL	CHERT				626.000		
UNIT	124.00	109.00	2		2	LITH	DEBITAGE	MICROFLAKE		QUARTZ				626.000		
UNIT	124.00	109.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			1			626.000		Y
UNIT	124.00	109.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				626.000		
UNIT	124.00	109.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				626.000		
UNIT	124.00	109.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				626.000		
PPLOT	124.00	109.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			41			627.000		Y
PPLOT	124.00	109.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			46			628.000		Y
PPLOT	124.00	109.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			9			629.000		Y
PPLOT	124.00	109.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			18			630.000		Y
UNIT	124.00	109.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			1			643.000		Y
PPLOT	124.00	109.00	3		1	LITH	OTHER	UNMODIFIED						644.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	124.00	109.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				645.000		
PPLOT	124.00	109.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	646.001		
**	NORTH	124.00 / WEST	110.00													
UNIT	124.00	110.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				619.000		
UNIT	124.00	110.00	1		3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				619.000		
UNIT	124.00	110.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE	BLACK/T	CHERT				619.000		
UNIT	124.00	110.00	1		6	HIST	OTHER	MODERN						619.000		Y
UNIT	124.00	110.00	1		3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				619.000		
UNIT	124.00	110.00	1		1	LITH	DEBITAGE	CHUNK		QUARTZ				619.000		
UNIT	124.00	110.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				619.000		
UNIT	124.00	110.00	1		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				619.000		
UNIT	124.00	110.00	1		2	HIST	NAIL	MODERN						619.000		Y
UNIT	124.00	110.00	1		5	HIST	METAL	MODERN						619.000		Y
UNIT	124.00	110.00	1		8	LITH	OTHER	FIRE-CRACKED ROCK			71			619.000		Y
UNIT	124.00	110.00	1		31	HIST	GLASS	MODERN						619.000		Y
UNIT	124.00	110.00	1		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				619.000		
UNIT	124.00	110.00	1		2	LITH	DEBITAGE	SECONDARY FLAKE	BLACK/T	CHERT				619.000		
UNIT	124.00	110.00	1		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				619.000		
UNIT	124.00	110.00	1		7	CER	VESSEL	(SHERDLET)						619.000		
UNIT	124.00	110.00	1		1	LITH	BIFACE	STAGE 1 BIFACE		QUARTZITE		BASE		619.001		
UNIT	124.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	619.002		
UNIT	124.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	619.003		
UNIT	124.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	619.004		
UNIT	124.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	619.005		
UNIT	124.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	619.006		
UNIT	124.00	110.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDECOR	619.007		
UNIT	124.00	110.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	619.008		
PPLOT	124.00	110.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BASE	UNDECOR	620.001	Entire 2x2m sq.	
PPLOT	124.00	110.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BASE	UNDECOR	621.001		
PPLOT	124.00	110.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	622.001		
UNIT	124.00	110.00	3		2	LITH	DEBITAGE	MICROFLAKE		QUARTZ				640.000		
UNIT	124.00	110.00	3		2	LITH	DEBITAGE	CHUNK		QUARTZ				640.000		
UNIT	124.00	110.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				640.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	124.00	110.00	3		2	CER	VESSEL	(SHERDLET)						640.000		
UNIT	124.00	110.00	3		1	LITH	DEBITAGE	MICROFLAKE	BLACK/T	CHERT				640.000		
UNIT	124.00	110.00	3		1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZITE		LATERAL		640.001		
PPLOT	124.00	110.00	3		1	LITH	OTHER	UNMODIFIED						641.000		Y
PPLOT	124.00	110.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			33			642.000		Y
UNIT	124.00	110.00	4		2	LITH	DEBITAGE	CHUNK		QUARTZ				662.000		
UNIT	124.00	110.00	4		3	LITH	DEBITAGE	MICROFLAKE		QUARTZ				662.000		
UNIT	124.00	110.00	4		4	LITH	OTHER	FIRE-CRACKED ROCK			1			662.000		Y
PPLOT	124.00	110.00	4		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	663.000		
PPLOT	124.00	110.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			74			664.000		Y
**	NORTH 124.00 / WEST 115.00															
UNIT	124.00	115.00	1		4	LITH	OTHER	FIRE-CRACKED ROCK			102			596.000		Y
UNIT	124.00	115.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				602.000		
UNIT	124.00	115.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	602.001		
PPLOT	124.00	115.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			2			603.000		Y
PPLOT	124.00	115.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	604.000		
**	NORTH 124.00 / WEST 116.00															
UNIT	124.00	116.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				595.000		
UNIT	124.00	116.00	1		1	LITH	DEBITAGE	CHUNK		QUARTZ				595.000		
UNIT	124.00	116.00	1		4	LITH	OTHER	FIRE-CRACKED ROCK			180			595.000		Y
UNIT	124.00	116.00	1		1	HIST	METAL	MODERN						595.000		Y
UNIT	124.00	116.00	1		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				595.000		
UNIT	124.00	116.00	1		2	HIST	GLASS	MODERN						595.000		Y
UNIT	124.00	116.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				595.000		
UNIT	124.00	116.00	1		7	HIST	OTHER	MODERN						595.000		Y
UNIT	124.00	116.00	1		2	CER	VESSEL	(SHERDLET)						595.000		
UNIT	124.00	116.00	1		1	LITH	BIFACE	TRIANGULAR POINT		QUARTZ		TIP		595.001		
UNIT	124.00	116.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	595.002		
UNIT	124.00	116.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	595.003		
UNIT	124.00	116.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	595.004		
UNIT	124.00	116.00	1		1	LITH	DEBITAGE	MULTIFACIAL FLAKE CORE	BLACK	CHERT				595.005		
UNIT	124.00	116.00	2		3	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				599.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	124.00	116.00	2		2	LITH	OTHER	FIRE-CRACKED ROCK			2			599.000		Y
UNIT	124.00	116.00	2		2	LITH	DEBITAGE	CHUNK		QUARTZ				599.000		
UNIT	124.00	116.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZITE				599.000		
UNIT	124.00	116.00	2		1	CER	VESSEL	(SHERDLET)						599.000		
UNIT	124.00	116.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	599.001		
PPLOT	124.00	116.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	600.000		
PPLOT	124.00	116.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			30			601.000		Y
UNIT	124.00	116.00	3		2	LITH	DEBITAGE	MICROFLAKE		QUARTZ				617.000		
UNIT	124.00	116.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZ				617.000		
PPLOT	124.00	116.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			45			618.000		Y
**	NORTH	125.00 / WEST	101.00													
UNIT	125.00	101.00	1		1	LITH	BIFACE	SIDE-NOTCHED POINT		RHYOLITE		WHOLE		534.001		
UNIT	125.00	101.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	PSEUD-CORD	534.002		
UNIT	125.00	101.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZ				544.000		
UNIT	125.00	101.00	2		7	FAUN	BONE	WORKED				FRAG	BURNED	544.000		
UNIT	125.00	101.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				544.000		
UNIT	125.00	101.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			1			544.000		Y
UNIT	125.00	101.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				544.000		
UNIT	125.00	101.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	544.001		
UNIT	125.00	101.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	544.002		
UNIT	125.00	101.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	544.003		
UNIT	125.00	101.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	544.004		
UNIT	125.00	101.00	2		2	SAMP	CHARCOAL	RADIOCARBON						545.000		N
PPLOT	125.00	101.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	546.001		
PPLOT	125.00	101.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	547.001		
PPLOT	125.00	101.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			5			548.000		Y
PPLOT	125.00	101.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			12			549.000		Y
UNIT	125.00	101.00	3		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				568.000		
UNIT	125.00	101.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				568.000		
UNIT	125.00	101.00	3		4	LITH	OTHER	FIRE-CRACKED ROCK			18			568.000		Y
UNIT	125.00	101.00	3		3	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				568.000		
UNIT	125.00	101.00	3		3	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				568.000		
UNIT	125.00	101.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				568.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	125.00	101.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				568.000		
UNIT	125.00	101.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				568.000		
UNIT	125.00	101.00	3		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				568.001		
PPLOT	125.00	101.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	569.001		
PPLOT	125.00	101.00	3		2	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	570.001		
PPLOT	125.00	101.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			19			571.000		Y
PPLOT	125.00	101.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			64			572.000		Y
PPLOT	125.00	101.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZ				573.001		
PPLOT	125.00	101.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			173			574.000		Y
PPLOT	125.00	101.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			19			575.000		Y
PPLOT	125.00	101.00	3		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				576.001		
UNIT	125.00	101.00	4		4	LITH	OTHER	FIRE-CRACKED ROCK			31			589.000		Y
UNIT	125.00	101.00	4		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				589.000		
UNIT	125.00	101.00	4		3	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				589.000		
UNIT	125.00	101.00	4		1	LITH	DEBITAGE	DECORTICATION FLAKE		RHYOLITE				589.000		
PPLOT	125.00	101.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			38			590.000		Y
**	NORTH	125.00 / WEST	102.00													
UNIT	125.00	102.00	2		4	LITH	OTHER	FIRE-CRACKED ROCK			11			550.000		Y
UNIT	125.00	102.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				550.000		
UNIT	125.00	102.00	2		3	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				550.000		
UNIT	125.00	102.00	2		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		UNKNOWN				550.000		
UNIT	125.00	102.00	2		1	FAUN	BONE	WORKED				FRAG	BURNED	550.000		
PPLOT	125.00	102.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	551.001		
PPLOT	125.00	102.00	2		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				552.000		
PPLOT	125.00	102.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			7			553.000		Y
UNIT	125.00	102.00	3		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				577.000		
UNIT	125.00	102.00	3		3	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				577.000		
UNIT	125.00	102.00	3		3	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				577.000		
UNIT	125.00	102.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				577.000		
UNIT	125.00	102.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				577.000		
UNIT	125.00	102.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE	MOT GRY	CHERT				577.000		
UNIT	125.00	102.00	3		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				577.000		
UNIT	125.00	102.00	3		2	LITH	OTHER	FIRE-CRACKED ROCK			1			577.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	125.00	102.00	3		2	FAUN	BONE	WORKED				FRAG	BURNED	577.000		
UNIT	125.00	102.00	3		1	SAMP	CHARCOAL	RADIOCARBON						578.000		N
PPLOT	125.00	102.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			26			579.000		Y
PPLOT	125.00	102.00	3		1	LITH	OTHER	UNMODIFIED		FERRG SNDS				580.000		N
PPLOT	125.00	102.00	3		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				581.001		
UNIT	125.00	102.00	4		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				591.000		
UNIT	125.00	102.00	4		6	LITH	OTHER	FIRE-CRACKED ROCK			15			591.000		Y
UNIT	125.00	102.00	4		4	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				591.000		
UNIT	125.00	102.00	4		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	591.001		
PPLOT	125.00	102.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			42			592.000		Y
PPLOT	125.00	102.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			8			593.000		Y
PPLOT	125.00	102.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			15			594.000		Y
**	NORTH	126.00 /	WEST	101.00												
UNIT	126.00	101.00	2		1	FAUN	BONE	WORKED				FRAG	BURNED	538.000		
UNIT	126.00	101.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE	CRM/WHT	CHERT				538.000		
UNIT	126.00	101.00	2		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				538.000		
UNIT	126.00	101.00	2		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				538.000		
UNIT	126.00	101.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			27			538.000		Y
UNIT	126.00	101.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				538.000		
UNIT	126.00	101.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				538.000		
PPLOT	126.00	101.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			10			539.000		Y
PPLOT	126.00	101.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	CORD-DECOR	540.001		
PPLOT	126.00	101.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			18			541.000		Y
PPLOT	126.00	101.00	2		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		CRYS QUARTZ				542.001		
PPLOT	126.00	101.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				543.000		
UNIT	126.00	101.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				559.000		
UNIT	126.00	101.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				559.000		
UNIT	126.00	101.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				559.000		
UNIT	126.00	101.00	3		3	LITH	OTHER	FIRE-CRACKED ROCK			19			559.000		Y
UNIT	126.00	101.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		RHYOLITE				559.000		
UNIT	126.00	101.00	3		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				559.000		
UNIT	126.00	101.00	3		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				559.000		
PPLOT	126.00	101.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			12			560.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	126.00	101.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			17			561.000		Y
PPLOT	126.00	101.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			94			562.000		Y
PPLOT	126.00	101.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			8			563.000		Y
PPLOT	126.00	101.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	564.001		
PPLOT	126.00	101.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				565.000		
PPLOT	126.00	101.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	566.001		
PPLOT	126.00	101.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			18			567.000		Y
UNIT	126.00	101.00	4		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				586.000		
UNIT	126.00	101.00	4		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				586.000		
UNIT	126.00	101.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			3			586.000		Y
UNIT	126.00	101.00	4		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				586.000		
UNIT	126.00	101.00	4		2	LITH	DEBITAGE	CHUNK		QUARTZ				586.000		
UNIT	126.00	101.00	4		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				586.000		
PPLOT	126.00	101.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK						587.000		Y
PPLOT	126.00	101.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			16			588.000		Y
PPLOT	126.00	101.00	4		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	588.001		
**	NORTH	126.00 / WEST	102.00													
UNIT	126.00	102.00	1		2	HIST	GLASS	MODERN						533.000		Y
UNIT	126.00	102.00	1		2	LITH	OTHER	FIRE-CRACKED ROCK			17			533.000		Y
UNIT	126.00	102.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE	BLACK/T	CHERT				533.000		
UNIT	126.00	102.00	1		3	CER	VESSEL	(SHERDLET)						533.000		
UNIT	126.00	102.00	1		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				533.000		
UNIT	126.00	102.00	1		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				533.000		
UNIT	126.00	102.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	533.001		
UNIT	126.00	102.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	533.002		
UNIT	126.00	102.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	533.003		
UNIT	126.00	102.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	533.004		
UNIT	126.00	102.00	2		5	LITH	OTHER	FIRE-CRACKED ROCK			23			535.000		Y
UNIT	126.00	102.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				535.000		
UNIT	126.00	102.00	2		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				535.000		
UNIT	126.00	102.00	2		1	FAUN	BONE	UNDETERMINED				FRAG	BURNED	535.000		
UNIT	126.00	102.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				535.000		
UNIT	126.00	102.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				535.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	126.00	102.00	2		1	LITH	OTHER	UNMODIFIED		HEMATITE				535.000		N
UNIT	126.00	102.00	2		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				535.000		
UNIT	126.00	102.00	2		1	CER	VESSEL	(SHERDLET)						535.000		
UNIT	126.00	102.00	2		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				535.001		
PPLOT	126.00	102.00	2		1	LITH	BIFACE	EXPANDING-STEMMED POINT		RHYOLITE		BASE		536.001		
PPLOT	126.00	102.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			15			537.000		Y
UNIT	126.00	102.00	3		7	LITH	OTHER	FIRE-CRACKED ROCK			25			554.000		Y
UNIT	126.00	102.00	3		3	LITH	DEBITAGE	MICROFLAKE		QUARTZ				554.000		
UNIT	126.00	102.00	3		2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				554.000		
UNIT	126.00	102.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZ				554.000		
UNIT	126.00	102.00	3		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				554.000		
UNIT	126.00	102.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				554.000		
UNIT	126.00	102.00	3		2	SAMP	CHARCOAL	RADIOCARBON						555.000		N
PPLOT	126.00	102.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	556.001		
PPLOT	126.00	102.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		CRYS QUARTZ				557.000		
PPLOT	126.00	102.00	3		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDECOR	558.001		
UNIT	126.00	102.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			8			582.000		Y
UNIT	126.00	102.00	4		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				582.000		
UNIT	126.00	102.00	4		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				582.000		
PPLOT	126.00	102.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			14			583.000		Y
PPLOT	126.00	102.00	4		1	LITH	OTHER	FIRE-CRACKED ROCK			13			584.000		Y
PPLOT	126.00	102.00	4		1	LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZ				585.001		
**	NORTH	129.00 / WEST	95.00													
UNIT	129.00	95.00	2		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				484.000		
UNIT	129.00	95.00	2		2	LITH	OTHER	FIRE-CRACKED ROCK			20			484.000		Y
UNIT	129.00	95.00	2		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				484.000		
UNIT	129.00	95.00	2		2	LITH	DEBITAGE	CHUNK		QUARTZITE				484.000		
UNIT	129.00	95.00	2		2	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				484.000		
UNIT	129.00	95.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				484.000		
UNIT	129.00	95.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				484.000		
UNIT	129.00	95.00	2		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				484.000		
UNIT	129.00	95.00	2		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				484.000		
UNIT	129.00	95.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				484.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	129.00	95.00	2		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				484.001		
PPLOT	129.00	95.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	CORD-DECOR	485.000		
PPLOT	129.00	95.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			22			486.000		Y
PPLOT	129.00	95.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			21			487.000		Y
UNIT	129.00	95.00	3		5	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				513.000		
UNIT	129.00	95.00	3		6	LITH	OTHER	FIRE-CRACKED ROCK			101			513.000		Y
UNIT	129.00	95.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				513.000		
UNIT	129.00	95.00	3		8	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				513.000		
UNIT	129.00	95.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				513.000		
UNIT	129.00	95.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE	CRM/WHT	CHERT				513.000		
UNIT	129.00	95.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE	TAN	CHERT				513.000		
UNIT	129.00	95.00	3		2	LITH	DEBITAGE	CHUNK		QUARTZ				513.000		
UNIT	129.00	95.00	3		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				513.000		
UNIT	129.00	95.00	3		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				513.000		
UNIT	129.00	95.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE	DRK GRY	CHERT				513.000		
UNIT	129.00	95.00	3		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				513.000		
UNIT	129.00	95.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				513.000		
UNIT	129.00	95.00	3		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				513.001		
UNIT	129.00	95.00	3		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				513.002		
PPLOT	129.00	95.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			55			514.000		Y
PPLOT	129.00	95.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			79			515.000		Y
PPLOT	129.00	95.00	3		1	LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZ				516.001		
PPLOT	129.00	95.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			48			517.000		Y
PPLOT	129.00	95.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				518.000		
PPLOT	129.00	95.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			66			519.000		Y
PPLOT	129.00	95.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			34			520.000		Y
PPLOT	129.00	95.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			46			521.000		Y
PPLOT	129.00	95.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			193			522.000		Y
PPLOT	129.00	95.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			46			523.000		Y
PPLOT	129.00	95.00	3		1	LITH	UNIFACE	RETOUCHED DECORTICATN FLAKE		SANDSTONE		WHOLE		524.001		
PPLOT	129.00	95.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZITE				525.000		
**	NORTH	129.00 / WEST	96.00													
UNIT	129.00	96.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				488.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	129.00	96.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				488.000		
UNIT	129.00	96.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZITE				488.000		
UNIT	129.00	96.00	2		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				488.000		
UNIT	129.00	96.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				488.000		
UNIT	129.00	96.00	2		2	LITH	DEBITAGE	CHUNK		QUARTZ				488.000		
UNIT	129.00	96.00	2		3	LITH	DEBITAGE	DECORTICATION FLAKE		RHYOLITE				488.000		
UNIT	129.00	96.00	2		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				488.000		
UNIT	129.00	96.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			1			488.000		Y
UNIT	129.00	96.00	2		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				488.000		
UNIT	129.00	96.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				488.000		
UNIT	129.00	96.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE	CRM/WHT	CHERT				488.000		
UNIT	129.00	96.00	2		1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		RHYOLITE		FRAG		488.001		
PPLOT	129.00	96.00	2		1	LITH	BIFACE	EXPANDING-STEMMED POINT		QUARTZ		BASE		489.001		
PPLOT	129.00	96.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZ				490.000		
PPLOT	129.00	96.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			24			491.000		Y
PPLOT	129.00	96.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				492.000		
PPLOT	129.00	96.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	493.001		
PPLOT	129.00	96.00	2		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				494.001		
PPLOT	129.00	96.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	495.001		
PPLOT	129.00	96.00	2		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				496.000		
PPLOT	129.00	96.00	2		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				497.001		
UNIT	129.00	96.00	3		5	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				526.000		
UNIT	129.00	96.00	3		4	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				526.000		
UNIT	129.00	96.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				526.000		
UNIT	129.00	96.00	3		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				526.000		
UNIT	129.00	96.00	3		3	LITH	DEBITAGE	CHUNK		QUARTZ				526.000		
UNIT	129.00	96.00	3		3	LITH	OTHER	FIRE-CRACKED ROCK			7			526.000		Y
UNIT	129.00	96.00	3		3	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				526.000		
UNIT	129.00	96.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				526.000		
UNIT	129.00	96.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				526.000		
UNIT	129.00	96.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				526.000		
UNIT	129.00	96.00	3		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				526.000		
UNIT	129.00	96.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				526.000		
UNIT	129.00	96.00	3		1	LITH	UNIFACE	RETOUCHED CORE		QUARTZITE		FRAG		526.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	129.00	96.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZ				527.000		
PPLOT	129.00	96.00	3		1	LITH	OTHER	UNMODIFIED		GABRO		WHOLE		528.000	(POSS PITTED?)	
PPLOT	129.00	96.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			22			529.000		Y
PPLOT	129.00	96.00	3		1	LITH	UNIFACE	RETOUCHED CORE		QUARTZITE		WHOLE		530.001		
**	NORTH	129.00 / WEST	109.00													
UNIT	129.00	109.00	1		2	LITH	DEBITAGE	SECONDARY FLAKE	DRK GRY	CHERT				406.000		
UNIT	129.00	109.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				406.000		
UNIT	129.00	109.00	1		1	LITH	DEBITAGE	CHUNK		QUARTZITE				406.000		
UNIT	129.00	109.00	1		1	LITH	DEBITAGE	CORE REJUVENATION FLAKE		QUARTZITE				406.000		
UNIT	129.00	109.00	1		1	LITH	OTHER	FIRE-CRACKED ROCK			193			406.000		Y
PPLOT	129.00	109.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	407.001		
UNIT	129.00	109.00	2		1	CER	VESSEL	(SHERDLET)						427.000		
UNIT	129.00	109.00	2		3	LITH	OTHER	FIRE-CRACKED ROCK			14			427.000		Y
UNIT	129.00	109.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				427.000		
UNIT	129.00	109.00	2		10	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				427.000		
UNIT	129.00	109.00	2		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				427.000		
UNIT	129.00	109.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				427.000		
UNIT	129.00	109.00	2		8	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				427.000		
UNIT	129.00	109.00	2		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZITE				427.001		
PPLOT	129.00	109.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				428.000		
PPLOT	129.00	109.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				429.000		
PPLOT	129.00	109.00	2		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				430.001		
PPLOT	129.00	109.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				431.000		
PPLOT	129.00	109.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				432.000		
UNIT	129.00	109.00	3		7	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				454.000		
UNIT	129.00	109.00	3		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				454.000		
UNIT	129.00	109.00	3		3	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZITE				454.000		
UNIT	129.00	109.00	3		7	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				454.000		
UNIT	129.00	109.00	3		11	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				454.000		
PPLOT	129.00	109.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				455.001		
PPLOT	129.00	109.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				456.000		
PPLOT	129.00	109.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				457.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 129.00 / WEST 110.00													
UNIT	129.00	110.00	1	1 LITH	OTHER	UNMODIFIED						408.000		Y
UNIT	129.00	110.00	1	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				408.000		
UNIT	129.00	110.00	1	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				408.000		
UNIT	129.00	110.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				433.000		
UNIT	129.00	110.00	2	5 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				433.000		
UNIT	129.00	110.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				433.000		
UNIT	129.00	110.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				433.000		
UNIT	129.00	110.00	2	2 LITH	OTHER	FIRE-CRACKED ROCK			4			433.000		Y
PPLOT	129.00	110.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			10			434.000		Y
PPLOT	129.00	110.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZITE				435.000		
PPLOT	129.00	110.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			99			436.000		Y
PPLOT	129.00	110.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				437.000		
PPLOT	129.00	110.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			260			438.000		Y
PPLOT	129.00	110.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			50			439.000		Y
UNIT	129.00	110.00	2	2 LITH	DEBITAGE	MICROFLAKE		QUARTZ				1173.000		
UNIT	129.00	110.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			1			1173.000		Y
UNIT	129.00	110.00	2 0	3 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				1173.000		
UNIT	129.00	110.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				1174.000		
UNIT	129.00	110.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				1174.000		
UNIT	129.00	110.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				1174.000		
UNIT	129.00	110.00	2	1 LITH	DEBITAGE	MICROFLAKE		QUARTZITE				1174.000		
UNIT	129.00	110.00	2	2 LITH	DEBITAGE	MICROFLAKE		QUARTZ				1174.000		
UNIT	129.00	110.00	3	3 LITH	OTHER	FIRE-CRACKED ROCK			37			458.000		Y
UNIT	129.00	110.00	3	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				458.000		
UNIT	129.00	110.00	3	2 LITH	DEBITAGE	CHUNK		QUARTZITE				458.000		
UNIT	129.00	110.00	3	4 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				458.000		
UNIT	129.00	110.00	3	5 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				458.000		
UNIT	129.00	110.00	3	3 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				458.000		
UNIT	129.00	110.00	3	3 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				458.000		
UNIT	129.00	110.00	3	8 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				458.000		
PPLOT	129.00	110.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			122			459.000		Y
PPLOT	129.00	110.00	3	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				460.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
**	NORTH 130.00 / WEST 95.00															
UNIT	130.00	95.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				474.000		
UNIT	130.00	95.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				474.000		
UNIT	130.00	95.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK YEL	CHERT				474.000		
UNIT	130.00	95.00	2		1	CER	VESSEL	(SHERDLET)						474.000		
UNIT	130.00	95.00	2		2	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				474.000		
UNIT	130.00	95.00	2		2	LITH	DEBITAGE	CHUNK		QUARTZ				474.000		
UNIT	130.00	95.00	2		6	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				474.000		
UNIT	130.00	95.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				474.000		
UNIT	130.00	95.00	2		4	LITH	OTHER	FIRE-CRACKED ROCK			19			474.000		Y
UNIT	130.00	95.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				474.000		
UNIT	130.00	95.00	2		3	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				474.000		
UNIT	130.00	95.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				474.000		
UNIT	130.00	95.00	2		1	CER	VESSEL	SAND-TEMPERED		UNCLAS-SURF		UNKNOWN	UNDECOR	474.001		
UNIT	130.00	95.00	2		1	LITH	OTHER	UNMODIFIED						474.002		N
PPLOT	130.00	95.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			41			475.000		Y
PPLOT	130.00	95.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			23			476.000		Y
PPLOT	130.00	95.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			45			477.000		Y
PPLOT	130.00	95.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			6			478.000		Y
PPLOT	130.00	95.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			52			479.000		Y
PPLOT	130.00	95.00	2		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				480.001		
PPLOT	130.00	95.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			17			481.000		Y
PPLOT	130.00	95.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			6			482.000		Y
PPLOT	130.00	95.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZ				483.000		
UNIT	130.00	95.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				509.000		
UNIT	130.00	95.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				509.000		
UNIT	130.00	95.00	3		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				509.000		
UNIT	130.00	95.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		RHYOLITE				509.000		
UNIT	130.00	95.00	3		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				509.000		
UNIT	130.00	95.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				509.000		
UNIT	130.00	95.00	3		5	LITH	OTHER	FIRE-CRACKED ROCK			106			509.000		Y
UNIT	130.00	95.00	3		4	LITH	DEBITAGE	CHUNK		QUARTZ				509.000		
UNIT	130.00	95.00	3		3	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				509.000		
PPLOT	130.00	95.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				510.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	130.00	95.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			136			511.000		Y
PPLOT	130.00	95.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			79			512.000		Y
**	NORTH	130.00 / WEST	96.00											
UNIT	130.00	96.00	1	2 LITH	DEBITAGE	CHUNK		QUARTZ				465.000		
UNIT	130.00	96.00	1	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				465.000		
UNIT	130.00	96.00	1	1 LITH	OTHER	FIRE-CRACKED ROCK			1			465.000		Y
UNIT	130.00	96.00	1	4 HIST	GLASS	MODERN						465.000		Y
UNIT	130.00	96.00	1	4 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				465.000		
UNIT	130.00	96.00	1	1 HIST	NAIL	MODERN						465.000		Y
UNIT	130.00	96.00	1	1 FAUN	BONE	WORKED				FRAG	BURNED	465.000		
UNIT	130.00	96.00	1	2 HIST	METAL	MODERN						465.000		Y
UNIT	130.00	96.00	1	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				465.000		
UNIT	130.00	96.00	1	2 HIST	OTHER	MODERN						465.000		Y
UNIT	130.00	96.00	1	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				465.000		
UNIT	130.00	96.00	1	2 CER	VESSEL	(SHERDLET)						465.000		
UNIT	130.00	96.00	1	5 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				465.000		
UNIT	130.00	96.00	1	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				465.000		
UNIT	130.00	96.00	1	1 CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	465.001		
UNIT	130.00	96.00	1	1 CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		RIM	UNDET DEC	465.002		
UNIT	130.00	96.00	1	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDET DEC	465.003		
UNIT	130.00	96.00	1	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDET DEC	465.004		
UNIT	130.00	96.00	1	1 CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDET DEC	465.005		
UNIT	130.00	96.00	1	1 CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDET DEC	465.006		
UNIT	130.00	96.00	1	1 CER	VESSEL	OYSTER SHELL-TEMPERED		UNCLAS-SURF		UNKNOWN	UNDET DEC	465.007		
UNIT	130.00	96.00	1	1 CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDET DEC	465.008		
UNIT	130.00	96.00	1	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				465.009		
UNIT	130.00	96.00	1	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				465.010		
UNIT	130.00	96.00	1	1 LITH	DEBITAGE	CHUNK		QUARTZ				466.000	2x2m sq.	
UNIT	130.00	96.00	1	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				466.000	2x2m sq.	
UNIT	130.00	96.00	1	1 LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				466.000	2x2m sq.	
UNIT	130.00	96.00	1	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				466.000	2x2m sq.	
UNIT	130.00	96.00	1	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				466.000	2x2m sq.	
UNIT	130.00	96.00	1	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				466.000	2x2m sq.	

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	130.00	96.00	1	5 LITH	OTHER	FIRE-CRACKED ROCK			154			466.000	2x2m sq.	Y
UNIT	130.00	96.00	2	3 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				467.000		
UNIT	130.00	96.00	2	1 LITH	DEBITAGE	MICROFLAKE		RHYOLITE				467.000		
UNIT	130.00	96.00	2	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				467.000		
UNIT	130.00	96.00	2	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZITE				467.000		
UNIT	130.00	96.00	2	1 CER	VESSEL	(SHERDLET)						467.000		
UNIT	130.00	96.00	2	1 LITH	DEBITAGE	MICROFLAKE	BLACK/T	CHERT				467.000		
UNIT	130.00	96.00	2	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				467.000		
UNIT	130.00	96.00	2	2 LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				467.000		
UNIT	130.00	96.00	2	3 LITH	DEBITAGE	CHUNK		QUARTZ				467.000		
UNIT	130.00	96.00	2	7 LITH	DEBITAGE	MICROFLAKE		QUARTZ				467.000		
UNIT	130.00	96.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZITE				467.000		
UNIT	130.00	96.00	2	1 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				467.000		
UNIT	130.00	96.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				467.000		
UNIT	130.00	96.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				467.000		
UNIT	130.00	96.00	2	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				467.000		
UNIT	130.00	96.00	2	3 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				467.000		
UNIT	130.00	96.00	2	1 CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	467.001		
UNIT	130.00	96.00	2	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				467.002		
UNIT	130.00	96.00	2	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZITE				467.003		
PPLOT	130.00	96.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	468.001		
PPLOT	130.00	96.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			15			469.000		Y
PPLOT	130.00	96.00	2	1 LITH	BIFACE	STAGE 1 BIFACE		QUARTZITE		TIP		470.001		
PPLOT	130.00	96.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	471.001		
PPLOT	130.00	96.00	2	1 CER	VESSEL	(SHERDLET)						472.000		
PPLOT	130.00	96.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZ				473.000		
UNIT	130.00	96.00	3	6 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				498.000		
UNIT	130.00	96.00	3	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				498.000		
UNIT	130.00	96.00	3	2 LITH	DEBITAGE	CHUNK		QUARTZ				498.000		
UNIT	130.00	96.00	3	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				498.000		
UNIT	130.00	96.00	3	4 LITH	DEBITAGE	MICROFLAKE		QUARTZ				498.000		
UNIT	130.00	96.00	3	3 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				498.000		
UNIT	130.00	96.00	3	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				498.000		
UNIT	130.00	96.00	3	7 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				498.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	130.00	96.00	3		1	FAUN	BONE	UNDETERMINED				FRAG	BURNED	498.000		
UNIT	130.00	96.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				498.000		
UNIT	130.00	96.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				498.000		
UNIT	130.00	96.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZITE				498.000		
UNIT	130.00	96.00	3		3	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				498.000		
UNIT	130.00	96.00	3		2	LITH	OTHER	FIRE-CRACKED ROCK			9			498.000		Y
UNIT	130.00	96.00	3		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				498.000		
UNIT	130.00	96.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE	DRK BRN	CHERT				498.000		
PPLOT	130.00	96.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZ				499.000		
PPLOT	130.00	96.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				500.000		
PPLOT	130.00	96.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			37			501.000		Y
PPLOT	130.00	96.00	3		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				502.001		
PPLOT	130.00	96.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			1			503.000		Y
PPLOT	130.00	96.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			5			504.000		Y
PPLOT	130.00	96.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZITE				505.000		
PPLOT	130.00	96.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			2			506.000		Y
PPLOT	130.00	96.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			2			507.000		Y
PPLOT	130.00	96.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				508.000		
UNIT	130.00	96.00	4		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				531.000		
UNIT	130.00	96.00	4		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				531.000		
UNIT	130.00	96.00	4		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				531.000		
UNIT	130.00	96.00	4		3	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				531.000		
UNIT	130.00	96.00	4		1	LITH	DEBITAGE	PRIMARY FLAKE	CREAM	CHERT				531.000		
UNIT	130.00	96.00	4		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				531.000		
UNIT	130.00	96.00	4		4	LITH	DEBITAGE	MICROFLAKE		QUARTZ				531.000		
UNIT	130.00	96.00	4		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				531.000		
UNIT	130.00	96.00	4		1	LITH	DEBITAGE	CHUNK		QUARTZ				531.000		
UNIT	130.00	96.00	4		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				531.000		
UNIT	130.00	96.00	4		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				531.000		
UNIT	130.00	96.00	4		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				531.000		
UNIT	130.00	96.00	4		3	LITH	OTHER	FIRE-CRACKED ROCK			13			531.000		Y
UNIT	130.00	96.00	4		1	LITH	DEBITAGE	MICROFLAKE		RHYOLITE				531.000		
UNIT	130.00	96.00	4		2	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				531.000		
UNIT	130.00	96.00	4		1	LITH	BIFACE	UNCLASSIFIABLE POINT		RHYOLITE		TIP		531.001		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	130.00	96.00	4	1 LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZ				531.002		
PPLOT	130.00	96.00	4	2 LITH	DEBITAGE	MICROFLAKE		QUARTZ				532.000		
PPLOT	130.00	96.00	4	1 LITH	OTHER	FIRE-CRACKED ROCK			49			532.000		Y
**	NORTH 130.00 / WEST 109.00													
UNIT	130.00	109.00	2	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				420.000		
UNIT	130.00	109.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				420.000		
UNIT	130.00	109.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZ				420.000		
UNIT	130.00	109.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			1			420.000		Y
UNIT	130.00	109.00	2	3 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				420.000		
UNIT	130.00	109.00	2	5 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				420.000		
UNIT	130.00	109.00	2	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		QUARTZ				420.000		
PPLOT	130.00	109.00	2	1 LITH	DEBITAGE	MULTIFACIAL FLAKE CORE		QUARTZITE				421.001		
PPLOT	130.00	109.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			15			422.000		Y
PPLOT	130.00	109.00	2	1 LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZITE				423.001		
PPLOT	130.00	109.00	2	1 LITH	OTHER	UNMODIFIED						424.000		Y
PPLOT	130.00	109.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDECOR	425.000		
PPLOT	130.00	109.00	2	1 LITH	OTHER	UNMODIFIED						426.000		Y
UNIT	130.00	109.00	3	2 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				448.000		
UNIT	130.00	109.00	3	1 CER	VESSEL	(SHERDLET)						448.000		
UNIT	130.00	109.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			26			448.000		Y
UNIT	130.00	109.00	3	1 LITH	DEBITAGE	CHUNK		QUARTZ				448.000		
UNIT	130.00	109.00	3	3 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZITE				448.000		
UNIT	130.00	109.00	3	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				448.000		
UNIT	130.00	109.00	3	2 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				448.000		
UNIT	130.00	109.00	3	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZITE				448.001		
PPLOT	130.00	109.00	3	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				449.000		
PPLOT	130.00	109.00	3	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				450.000		
PPLOT	130.00	109.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			18			451.000		Y
PPLOT	130.00	109.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			26			452.000		Y
PPLOT	130.00	109.00	3	1 CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	453.001		
**	NORTH 130.00 / WEST 110.00													
UNIT	130.00	110.00	1	4 HIST	OTHER	MODERN						404.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	130.00	110.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				404.000		
UNIT	130.00	110.00	1		2	HIST	METAL	MODERN						404.000		Y
UNIT	130.00	110.00	1		4	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				404.000		
UNIT	130.00	110.00	1		10	HIST	GLASS	MODERN						404.000		Y
UNIT	130.00	110.00	1		3	LITH	DEBITAGE	CHUNK		QUARTZ				404.000		
UNIT	130.00	110.00	1		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				404.000		
UNIT	130.00	110.00	1		4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				404.000		
UNIT	130.00	110.00	1		3	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				404.000		
UNIT	130.00	110.00	1		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				404.000		
UNIT	130.00	110.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				404.000		
UNIT	130.00	110.00	1		7	LITH	OTHER	FIRE-CRACKED ROCK			72			404.000		Y
UNIT	130.00	110.00	1		2	HIST	NAIL	MODERN						404.000		Y
UNIT	130.00	110.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		FABRIC-SURF		BODY	UNDET DEC	404.001		
UNIT	130.00	110.00	1		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDET DEC	404.002		
UNIT	130.00	110.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	404.003		
UNIT	130.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	404.004		
UNIT	130.00	110.00	1		1	CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	404.005		
UNIT	130.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	404.006		
UNIT	130.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		RIM	UNDET DEC	404.007		
UNIT	130.00	110.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	404.008		
UNIT	130.00	110.00	1		1	LITH	OTHER	FIRE-CRACKED ROCK		SANDSTONE				404.009		
UNIT	130.00	110.00	1		1	LITH	DEBITAGE	UNCLASSIFIABLE CORE		QUARTZ				404.010		
UNIT	130.00	110.00	1		1	LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		FRAG		404.011		
UNIT	130.00	110.00	1		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	405.001	backdirt, 2x2m sq.	
UNIT	130.00	110.00	1		1	CER	VESSEL	QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	405.002	backdirt, 2x2m sq.	
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				409.000		
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	MICROFLAKE		QUARTZ				409.000		
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				409.000		
UNIT	130.00	110.00	2		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				409.000		
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZITE				409.000		
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				409.000		
UNIT	130.00	110.00	2		2	LITH	OTHER	FIRE-CRACKED ROCK			1			409.000		Y
UNIT	130.00	110.00	2		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				409.000		
UNIT	130.00	110.00	2		2	LITH	DEBITAGE	MICROFLAKE		QUARTZITE				409.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	MICROFLAKE		RHYOLITE				409.000		
UNIT	130.00	110.00	2		2	CER	VESSEL	(SHERDLET)						409.000		
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				409.000		
PPLOT	130.00	110.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZ				410.000		
PPLOT	130.00	110.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			50			411.000		N
PPLOT	130.00	110.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				412.000		
PPLOT	130.00	110.00	2		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				413.000		
PPLOT	130.00	110.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			22			414.000		N
PPLOT	130.00	110.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			36			415.000		N
PPLOT	130.00	110.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			64			416.000		N
PPLOT	130.00	110.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			42			417.000		N
PPLOT	130.00	110.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			72			418.000		N
PPLOT	130.00	110.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			187			419.000		N
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	MICROFLAKE		QUARTZ				1171.000		
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				1172.000		
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				1172.000		
UNIT	130.00	110.00	2		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				1172.000		
UNIT	130.00	110.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				1172.000		
UNIT	130.00	110.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				440.000		
UNIT	130.00	110.00	3		2	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				440.000		
UNIT	130.00	110.00	3		1	FAUN	BONE	UNDETERMINED				FRAG	UNBURNED	440.000		
UNIT	130.00	110.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			1			440.000		Y
UNIT	130.00	110.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK						440.000		
UNIT	130.00	110.00	3		5	LITH	DEBITAGE	MICROFLAKE		QUARTZ				440.000		
UNIT	130.00	110.00	3		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				440.000		
UNIT	130.00	110.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				440.000		
UNIT	130.00	110.00	3		1	LITH	DEBITAGE	MICROFLAKE		RHYOLITE				440.000		
UNIT	130.00	110.00	3		4	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				440.000		
UNIT	130.00	110.00	3		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				440.000		
UNIT	130.00	110.00	3		1	LITH	DEBITAGE	CHUNK		QUARTZ				441.000	Root/burrow stain	
UNIT	130.00	110.00	3		3	FAUN	BONE	UNDETERMINED				FRAG	UNBURNED	441.000	Root/burrow stain	
UNIT	130.00	110.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				441.000	Root/burrow stain	
UNIT	130.00	110.00	3		4	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				441.000	Root/burrow stain	
UNIT	130.00	110.00	3		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				441.000	Root/burrow stain	

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV LYR	# GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
PPLOT	130.00	110.00	3	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	442.001	Root/burrow stain	
PPLOT	130.00	110.00	3	1 CER	VESSEL	OYSTER SHELL-TEMPERED		CORD-SURF		BODY	UNDECOR	443.001	Root/burrow stain	
PPLOT	130.00	110.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			28			444.000		Y
PPLOT	130.00	110.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			39			445.000		Y
PPLOT	130.00	110.00	3	1 LITH	OTHER	FIRE-CRACKED ROCK			142			446.000		Y
PPLOT	130.00	110.00	3	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				447.000	Root/burrow stain	
PPLOT	130.00	110.00	3	1 HIST	NAIL	MODERN						1170.000		N
UNIT	130.00	110.00	4	1 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				461.000		
UNIT	130.00	110.00	4	2 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				461.000		
UNIT	130.00	110.00	4	1 LITH	DEBITAGE	UNCLASSIFIABLE FLAKE		RHYOLITE				461.000		
UNIT	130.00	110.00	4	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZ		BASE		461.001		
PPLOT	130.00	110.00	4	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	CORD-DECOR	462.001		
PPLOT	130.00	110.00	4	1 LITH	BIFACE	UNCLASSIFIABLE BIFACE		QUARTZITE		LATERAL		463.001		
PPLOT	130.00	110.00	4	1 LITH	BIFACE	EXPANDING-STEMMED POINT		QUARTZ		WHOLE		464.001		
**	NORTH	133.00 / WEST	111.00											
UNIT	133.00	111.00	1	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				356.001		
UNIT	133.00	111.00	2	4 LITH	OTHER	FIRE-CRACKED ROCK			18			374.000		Y
UNIT	133.00	111.00	2	3 LITH	DEBITAGE	CHUNK		QUARTZ				374.000		
UNIT	133.00	111.00	2	1 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				374.000		
UNIT	133.00	111.00	2	3 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZITE				374.000		
UNIT	133.00	111.00	2	1 LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				374.000		
UNIT	133.00	111.00	2	5 LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				374.000		
UNIT	133.00	111.00	2	1 LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				374.000		
UNIT	133.00	111.00	2	3 LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				374.000		
UNIT	133.00	111.00	2	2 LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				374.000		
UNIT	133.00	111.00	2	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				374.001		
UNIT	133.00	111.00	2	1 LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				374.003		
PPLOT	133.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		RIM	UNDET DEC	375.000		
PPLOT	133.00	111.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			11			376.000		Y
PPLOT	133.00	111.00	2	1 CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDET DEC	377.000		
PPLOT	133.00	111.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZ				378.000		
PPLOT	133.00	111.00	2	1 LITH	OTHER	FIRE-CRACKED ROCK			8			379.000		Y
PPLOT	133.00	111.00	2	1 LITH	DEBITAGE	CHUNK		QUARTZ				380.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	133.00	111.00	3		2	LITH	DEBITAGE	CHUNK		QUARTZ				400.000		
UNIT	133.00	111.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				400.000		
UNIT	133.00	111.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				400.000		
UNIT	133.00	111.00	3		3	LITH	OTHER	FIRE-CRACKED ROCK			15			400.000		Y
UNIT	133.00	111.00	3		1	LITH	DEBITAGE	BIPOLAR FLAKE W/CORTEX		QUARTZ				400.000		
PPLOT	133.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			23			401.000		Y
PPLOT	133.00	111.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				402.000		
**	NORTH 133.00 / WEST 112.00															
UNIT	133.00	112.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				381.000	Top 2cm,root disturb	
UNIT	133.00	112.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				381.000	Top 2cm,root disturb	
UNIT	133.00	112.00	2		3	CER	VESSEL	(SHERDLET)						381.000	Top 2cm,root disturb	
UNIT	133.00	112.00	2		1	HIST	GLASS	MODERN						381.000	Top 2cm,root disturb	N
UNIT	133.00	112.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZ				381.000	Top 2cm,root disturb	
UNIT	133.00	112.00	2		2	LITH	OTHER	FIRE-CRACKED ROCK			59			381.000	Top 2cm,root disturb	Y
UNIT	133.00	112.00	2		2	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				381.000	Top 2cm,root disturb	
UNIT	133.00	112.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				382.000	Lower 8cm	
UNIT	133.00	112.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZITE				382.000	Lower 8cm	
UNIT	133.00	112.00	2		3	LITH	OTHER	FIRE-CRACKED ROCK			14			382.000	Lower 8cm	Y
UNIT	133.00	112.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		RHYOLITE				382.000	Lower 8cm	
UNIT	133.00	112.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				382.000	Lower 8cm	
UNIT	133.00	112.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				382.000	Lower 8cm	
UNIT	133.00	112.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				382.000	Lower 8cm	
UNIT	133.00	112.00	2		2	CER	VESSEL	(SHERDLET)						382.000	Lower 8cm	
UNIT	133.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDET DEC	382.001	Lower 8cm	
PPLOT	133.00	112.00	2		1	LITH	OTHER	UNMODIFIED						383.000		Y
PPLOT	133.00	112.00	2		1	LITH	OTHER	UNMODIFIED						384.000		Y
PPLOT	133.00	112.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			23			385.000		Y
UNIT	133.00	112.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			49			403.000		Y
**	NORTH 134.00 / WEST 111.00															
UNIT	134.00	111.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZITE				366.000		
UNIT	134.00	111.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				366.000		
UNIT	134.00	111.00	2		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				366.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	134.00	111.00	2		1	LITH	DEBITAGE	TERTIARY FLAKE		QUARTZ				366.000		
UNIT	134.00	111.00	2		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				366.000		
UNIT	134.00	111.00	2		4	LITH	OTHER	FIRE-CRACKED ROCK			26			366.000		Y
UNIT	134.00	111.00	2		1	CER	VESSEL	(SHERDLET)						366.000		
PPLOT	134.00	111.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	367.000		
PPLOT	134.00	111.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				368.000		
PPLOT	134.00	111.00	2		1	LITH	OTHER	UNMODIFIED						369.000		Y
PPLOT	134.00	111.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			34			370.000		Y
PPLOT	134.00	111.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	371.000		
PPLOT	134.00	111.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZ				372.000		
PPLOT	134.00	111.00	2		1	LITH	OTHER	FIRE-CRACKED ROCK			9			373.000		Y
UNIT	134.00	111.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				394.000		
UNIT	134.00	111.00	3		3	LITH	OTHER	FIRE-CRACKED ROCK			6			394.000		Y
PPLOT	134.00	111.00	3		1	CER	VESSEL	UNDETERMINED		UNDETR-SURF		UNKNOWN	UNDETER	395.000		
PPLOT	134.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			67			396.000		Y
PPLOT	134.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			13			397.000		Y
PPLOT	134.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			32			398.000		Y
PPLOT	134.00	111.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			18			399.000		Y
**	NORTH 134.00 / WEST 112.00															
UNIT	134.00	112.00	1		1	LITH	DEBITAGE	TERTIARY FLAKE	CRM/WHT	CHERT				355.000		
UNIT	134.00	112.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE	MED RED	CHERT				355.000		
UNIT	134.00	112.00	1		4	LITH	OTHER	FIRE-CRACKED ROCK			17			355.000		Y
UNIT	134.00	112.00	1		4	CER	VESSEL	(SHERDLET)						355.000		
UNIT	134.00	112.00	1		3	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZITE				355.000		
UNIT	134.00	112.00	1		1	LITH	DEBITAGE	BIPOLAR FLAKE W/O CORTEX		QUARTZ				355.000		
UNIT	134.00	112.00	1		1	LITH	DEBITAGE	TERTIARY FLAKE	LT GRY	CHERT				355.000		
UNIT	134.00	112.00	1		1	LITH	DEBITAGE	UNCLASSIFIABLE FLAKE	MED RED	CHERT				355.000		
UNIT	134.00	112.00	1		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				355.000		
UNIT	134.00	112.00	1		2	HIST	OTHER	MODERN						355.000		Y
UNIT	134.00	112.00	1		4	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				355.000		
UNIT	134.00	112.00	1		2	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				355.000		
UNIT	134.00	112.00	1		72	HIST	GLASS	MODERN						355.000		Y
UNIT	134.00	112.00	1		3	HIST	METAL	MODERN						355.000		Y

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	134.00	112.00	1		1	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				355.000		
UNIT	134.00	112.00	1		2	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				355.000		
UNIT	134.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	355.001		
UNIT	134.00	112.00	1		1	CER	VESSEL	SAND-TEMPERED		UNDETR-SURF		BODY	INCISED	355.002		
UNIT	134.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	355.003		
UNIT	134.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNCLAS-SURF		BODY	UNDET DEC	355.004		
UNIT	134.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDECOR	355.005		
UNIT	134.00	112.00	1		1	CER	VESSEL	SAND-TEMPERED		CORD-SURF		BODY	UNDECOR	355.006		
UNIT	134.00	112.00	1		1	CER	VESSEL	FINE OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	355.007		
UNIT	134.00	112.00	1		1	CER	VESSEL	SAND & SHELL-TEMPERED		SMOOTH-SURF		BODY	UNDECOR	355.008		
UNIT	134.00	112.00	1		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	355.009		
UNIT	134.00	112.00	1		1	LITH	DEBITAGE	BIPOLAR CORE		QUARTZ				355.010		
UNIT	134.00	112.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				357.000		
UNIT	134.00	112.00	2		3	LITH	OTHER	FIRE-CRACKED ROCK			17			357.000		Y
UNIT	134.00	112.00	2		5	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				357.000		
UNIT	134.00	112.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				357.000		
UNIT	134.00	112.00	2		1	LITH	DEBITAGE	SECONDARY FLAKE		RHYOLITE				357.000		
UNIT	134.00	112.00	2		1	LITH	DEBITAGE	PRIMARY FLAKE		QUARTZ				357.000		
UNIT	134.00	112.00	2		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				357.000		
UNIT	134.00	112.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		UNKNOWN	UNDET DEC	357.001		
UNIT	134.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	357.002		
PPLOT	134.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	CORD-DECOR	358.000		
PPLOT	134.00	112.00	2		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				359.000		
PPLOT	134.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		CORD-SURF		BODY	UNDECOR	360.000		
PPLOT	134.00	112.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZ				361.000		
PPLOT	134.00	112.00	2		1	CER	VESSEL	OYSTER SHELL-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	362.000		
PPLOT	134.00	112.00	2		1	LITH	DEBITAGE	CHUNK		QUARTZITE				363.000		
PPLOT	134.00	112.00	2		1	LITH	OTHER	UNMODIFIED						364.000		N
PPLOT	134.00	112.00	2		1	CER	VESSEL	SAND & QUARTZ-TEMPERED		UNDETR-SURF		BODY	UNDET DEC	365.000		
UNIT	134.00	112.00	3		2	LITH	DEBITAGE	MICROFLAKE		QUARTZ				386.000		
UNIT	134.00	112.00	3		1	LITH	DEBITAGE	SECONDARY FLAKE	BAN YEL	CHERT				386.000		
UNIT	134.00	112.00	3		3	LITH	OTHER	FIRE-CRACKED ROCK			28			386.000		Y
UNIT	134.00	112.00	3		1	LITH	DEBITAGE	PRIMARY FLAKE	TAN	CHERT				386.000		
UNIT	134.00	112.00	3		2	CER	VESSEL	(SHERDLET)						386.000		

ARTIFACT INVENTORY
KETTERING SITE 18PR174, PHASE III

UNIT	NORTH	WEST	LV	LYR	#	GROUP	CLASS	TYPE	COLOR	SUBTYPE	WT(g)	AUX1	AUX2	LOT	COMMENTS	DISC(Y/N)
UNIT	134.00	112.00	3		2	FAUN	BONE	UNDETERMINED				FRAG	BURNED	386.000		
UNIT	134.00	112.00	3		1	LITH	DEBITAGE	TERTIARY FLAKE	DRK YEL	CHERT				386.000		
UNIT	134.00	112.00	3		2	LITH	DEBITAGE	SECONDARY FLAKE		QUARTZ				386.000		
PPLOT	134.00	112.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			58			387.000		Y
PPLOT	134.00	112.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			69			388.000		Y
PPLOT	134.00	112.00	3		1	LITH	UNIFACE	SIDE SCRAPER	MOT BRN	CHERT		WHOLE		389.001		
PPLOT	134.00	112.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			42			390.000		Y
PPLOT	134.00	112.00	3		1	LITH	DEBITAGE	DECORTICATION FLAKE		QUARTZ				391.000		
PPLOT	134.00	112.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			24			392.000		Y
PPLOT	134.00	112.00	3		1	LITH	OTHER	FIRE-CRACKED ROCK			7			393.000		Y

Appendix E
Ceramic Measurements

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
1.001	1	unknown	sand	smoothed/plain	body	none	0.0		0	
2.001	1	Accokeek	sand & quartz	undetermined	rim	none	0.0		0	
2.002	1	Accokeek	sand & quartz	undetermined	rim	none	0.0		0	
2.003	1	Accokeek	sand & quartz	undetermined	body	none	0.0		0	
2.004	1	Accokeek	sand & quartz	undetermined	body	none	0.0		0	
2.005	1	Accokeek	sand & quartz	undetermined	body	none	0.0		0	
2.006	1	Accokeek	sand & quartz	undetermined	body	none	0.0		0	
2.007	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
2.008	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
2.009	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
2.010	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
2.011	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
2.012	1	UST	shell	undetermined	body	none	0.0		0	
2.013	1	UST	shell	smoothed/plain	body	none	0.0		0	
2.014	1	Accokeek	sand	undetermined	rim	none	0.0		0	
2.015	1	UST	shell	smoothed/plain	body	none	0.0		0	
2.016	1	UST	shell	smoothed/plain	body	none	0.0		0	
2.017	1	UST	shell	smoothed/plain	body	none	0.0		0	
5.002	1	Mockley	coarse-crushed oyster shell	undetermined	body	none	0.0		0	
5.003	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
6.001	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
6.002	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
6.003	1	Accokeek	sand & quartz	undetermined	body	none	0.0		0	
6.004	1	Accokeek	sand & quartz	undetermined	body	none	0.0		0	
12.001	1	Shepard	quartz	cord-marked	body	none	0.0		0	
14.000	1	---	(sherdlet)	cord-marked	---	none	0.0		0	
15.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
17.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
17.001	1	Townsend	finely-crushed oyster shell	unclassifiable	body	none	0.0		0	
17.002	1	UST	shell	unclassifiable	body	none	0.0		0	
17.003	1	UST	shell	undetermined	body	none	0.0		0	
17.004	1	Townsend	finely-crushed oyster shell	fabric-impressed	body	none	0.0		0	
18.001	1	Potomac Creek	quartz	cord-marked	body	none	0.0		0	
21.001	1	Accokeek coarseware	sand & quartz	unclassifiable	body	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
22.001	1	Potomac Creek	quartz	smoothed/plain	base	none	0.0		0	
24.001	1	Townsend	sand & shell	fabric-impressed	body	none	0.0		0	
25.001	1	Accokeek coarseware	sand & quartz	cord-marked	body	none	0.0		0	
27.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
31.001	1	Early Woodland	sand	unclassifiable	body	none	0.0		0	
34.001	1	Townsend	shell	unclassifiable	body	incised	0.0		0	
38.001	1	Early Woodland	sand	unclassifiable	body	none	0.0		0	
39.001	1	Townsend	shell	undetermined	body	none	0.0		0	
40.001	1	Townsend	shell	undetermined	body	none	0.0		0	
41.001	1	Townsend	shell	smoothed/plain	base	none	0.0		0	
41.002	1	Mockley Net	shell	undetermined	body	none	0.0		0	
44.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
44.001	1	Mockley Net	shell	undetermined	body	none	0.0		0	
46.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
47.001	1	Townsend	sand & shell	unclassifiable	body	none	0.0		0	
49.001	1	Mockley Net	sand & shell	net-impressed	body	none	0.0		0	
49.002	1	UST	shell	unclassifiable	body	none	0.0		0	
50.002	1	unknown Late Woodland	quartz & shell	fabric-impressed	body	none	0.0		0	
55.001	1	UST	shell	unclassifiable	body	none	0.0		0	
58.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
58.001	1	Early Woodland	sand	unclassifiable	body	none	0.0		0	
58.002	1	unknown	sand	unclassifiable	body	none	0.0		0	
61.002	1	unknown	sand & quartz	unclassifiable	body	none	0.0		0	
62.001	1	Accokeek Classic	quartz	cord-marked	body	none	0.0		0	
62.002	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
65.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
65.001	1	Potomac Creek	quartz	cord-marked	body	none	0.0		0	
66.001	1	Accokeek Classic	sand & quartz	cord-marked	body	none	0.0		0	
66.002	1	Fabric Impressed Coarseware	sand & quartz	fabric-impressed	body	none	0.0		0	
69.000	3	---	(sherdlet)	unclassifiable	---	none	0.0		0	
70.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
70.001	1	Accokeek	sand & quartz	unclassifiable	body	none	0.0		0	
70.002	1	Accokeek	quartz	cord-marked	body	none	0.0		0	
70.003	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
71.000	3	Accokeek V #1	(sherdlet)	unclassifiable	---	none	0.0		0	
71.001	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.002	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.003	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.004	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.005	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.006	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.007	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.008	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.009	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.010	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.011	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
71.012	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
72.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
72.001	1	Townsend	shell	fabric-impressed	body	none	0.0		0	
77.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
79.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
79.002	1	Potomac Creek	sand	cord-marked	body	none	0.0		0	
80.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
80.001	1	Potomac Creek	quartz	unclassifiable	body	none	0.0		0	
80.002	1	Early Woodland	sand & quartz	unclassifiable	body	none	0.0		0	
80.003	1	Potomac Creek	sand & quartz	unclassifiable	body	none	0.0		0	
80.004	1	Early Woodland	sand & quartz	unclassifiable	body	none	0.0		0	
81.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
81.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
81.001	1	Accokeek	sand & quartz	unclassifiable	body	none	0.0		0	
81.002	1	Accokeek	sand	unclassifiable	body	none	0.0		0	
81.003	1	Early Woodland	sand	unclassifiable	body	none	0.0		0	
81.004	1	Accokeek	sand	cord-marked	body	none	0.0		0	
81.005	1	Potomac Creek	quartz	cord-marked	body	none	0.0		0	
82.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
82.001	1	Townsend	shell	fabric-impressed	body	none	0.0		0	
82.002	1	Townsend	shell	cord-marked	body	none	0.0		0	
84.000	1	---	(sherdlet)	cord-marked	---	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
84.001	1	Townsend	shell	undetermined	body	none	0.0		0	
84.002	1	Accokeek	quartz	cord-marked	body	none	0.0		0	
85.001	1	Townsend	shell	smoothed/plain	body	none	0.0		0	
85.002	1	Potomac Creek	quartz	unclassifiable	body	none	0.0		0	
85.003	1	Potomac Creek	quartz	unclassifiable	body	none	0.0		0	
85.004	1	Potomac Creek	quartz	unclassifiable	body	none	0.0		0	
86.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
86.000	1	---	(sherdlet)	cord-marked	---	none	0.0		0	
86.001	1	Selden Island	steatite	cord-marked	body	none	0.0		0	
86.002	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
86.003	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
86.004	1	Townsend	sand & shell	fabric-impressed	body	none	0.0		0	
87.001	1	Townsend	sand & shell	unclassifiable	body	none	0.0		0	
90.001	1	UST	shell	unclassifiable	body	none	0.0		0	
93.001	1	unknown	undetermined	unclassifiable	body	none	0.0		0	
95.001	1	Accokeek	sand & quartz	smoothed/plain	base	none	0.0		0	
95.002	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
96.001	1	UST	shell	unclassifiable	body	none	0.0		0	
97.001	1	Moyaone	sand	smoothed/plain	body	none	0.0		0	
98.001	1	Townsend	shell	undetermined	body	none	0.0		0	
100.001	1	Accokeek coarseware	quartz	unclassifiable	body	none	0.0		0	
100.002	1	Potomac Creek	quartz	cord-marked	body	none	0.0		0	
100.003	1	Townsend	shell	undetermined	body	none	0.0		0	
101.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
101.001	1	Mockley	shell	unclassifiable	body	none	0.0		0	
101.002	1	Townsend	shell	fabric-impressed	body	none	0.0		0	
101.003	1	Potomac Creek	sand	cord-marked	body	none	0.0		0	
102.002	1	Mockley Fabric Impressed	shell	fabric-impressed	body	none	0.0		0	
106.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
106.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
107.002	1	Accokeek coarseware	sand	cord-marked	body	none	0.0		0	
108.002	1	Mockley Fabric Impressed	shell	fabric-impressed	body	none	0.0		0	
110.001	1	Early Woodland	sand & quartz	unclassifiable	body	none	0.0		0	
111.001	1	Townsend	shell	unclassifiable	body	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
111.002	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
112.001	1	Early Woodland	sand	unclassifiable	body	none	0.0		0	
114.001	1	Potomac Creek	sand	cord-marked	base	none	0.0		0	
115.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
115.001	1	Townsend	shell	undetermined	body	none	0.0		0	
115.002	1	UST	shell	unclassifiable	body	none	0.0		0	
115.003	1	unknown	sand	unclassifiable	body	none	0.0		0	
115.004	1	UST	shell	unclassifiable	body	none	0.0		0	
117.001	1	Marcey Creek	steatite	smoothed/plain	body	none	0.0		0	
117.002	1	unknown Late Woodland	sand	net-impressed	rim	none	0.0		0	
119.001	1	UST	shell	unclassifiable	body	none	0.0		0	
120.001	1	Accokeek	quartz	cord-marked	body	none	0.0		0	
120.002	1	Accokeek coarseware	quartz	undetermined	body	none	0.0		0	
120.003	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
120.004	1	unknown	sand	unclassifiable	body	none	0.0		0	
123.001	1	Mockley	shell	undetermined	body	none	0.0		0	
124.001	1	Early Woodland	sand	net-impressed	body	none	0.0		0	
124.002	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
125.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
126.001	1	Moyaone	sand	smoothed/plain	body	none	0.0		0	
129.001	1	Shepard	quartz	cord-marked	body	none	0.0		0	
129.002	1	unknown	sand	smoothed/plain	body	none	0.0		0	
129.003	1	Moyaone	sand	unclassifiable	body	none	0.0		0	
131.001	1	UST	sand & shell	unclassifiable	body	none	0.0		0	
131.002	1	Accokeek	sand	cord-marked	body	none	0.0		0	
132.001	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
135.001	1	UST	shell	unclassifiable	body	none	0.0		0	
136.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
140.001	1	Townsend/Smallwood?	quartz & shell	fabric-impressed	body	none	0.0		0	
142.001	1	Early Woodland	sand & quartz	cord-marked	body	none	0.0		0	
142.002	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
142.003	1	Accokeek	sand	unclassifiable	body	none	0.0		0	
144.002	1	Accokeek	sand	cord-marked	body	none	0.0		0	
145.001	1	Mockley Fabric Impressed	shell	fabric-impressed	body	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
145.002	1	UST	shell	unclassifiable	body	none	0.0		0	
145.003	1	UST	shell	unclassifiable	body	incised	0.0		0	
146.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
146.001	1	Early Woodland	sand	unclassifiable	body	none	0.0		0	
146.002	1	Mockley Net	shell	net-impressed	rim	none	0.0		0	
146.003	1	Mockley	shell	net-impressed	body	none	0.0		0	
147.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
151.001	1	Early Woodland	sand	smoothed/plain	body	none	0.0		0	
152.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
152.001	1	Potomac Creek	quartz	cord-marked	rim	none	0.0		0	
154.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
154.001	1	Accokeek coarseware	sand & quartz	cord-marked	body	none	0.0		0	
158.001	1	Potomac Creek	sand & quartz	smoothed/plain	body	none	0.0		0	
159.001	1	Townsend	shell	smoothed/plain	body	none	0.0		0	
160.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
160.001	1	UST	shell	undetermined	body	none	0.0		0	
166.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
168.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
171.001	1	Shepard	quartz	cord-marked	body	none	0.0		0	
171.002	1	unknown	sand & quartz	undetermined	body	none	0.0		0	
172.001	1	unknown Late Woodland	sand & quartz	cord-marked	body	none	0.0		0	
173.001	1	Early Woodland	sand	net-impressed	body	none	0.0		0	
175.001	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
179.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
179.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
179.001	1	Early Woodland	sand & quartz	undetermined	body	none	0.0		0	
179.002	1	Townsend	sand & shell	undetermined	body	none	0.0		0	
179.003	1	Townsend	shell	smoothed/plain	body	none	0.0		0	
179.004	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
179.005	1	UST	shell	undetermined	body	none	0.0		0	
180.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
180.002	1	Townsend	sand & quartz	undetermined	body	none	0.0		0	
181.001	1	Accokeek coarseware	sand & quartz	cord-marked	body	none	0.0		0	
182.001	1	Accokeek	sand	cord-marked	rim	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
184.000	1	---	(sherdlet)	cord-marked	---	none	0.0		0	
185.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
190.001	1	Accokeek coarseware	sand & quartz	cord-marked	body	none	0.0		0	
190.002	1	Potomac Creek	sand & quartz	cord-marked	body	none	0.0		0	
190.003	1	Accokeek coarseware	sand & quartz	cord-marked	rim	none	0.0		0	
190.004	1	Early Woodland	sand & quartz	undetermined	body	none	0.0		0	
190.005	1	Early Woodland	sand	undetermined	body	none	0.0		0	
190.006	1	Townsend	shell	smoothed/plain	body	none	0.0		0	
190.007	1	Accokeek coarseware	quartz	undetermined	body	none	0.0		0	
190.008	1	Potomac Creek	quartz	cord-marked	body	none	0.0		0	
191.000	5	---	(sherdlet)	unclassifiable	---	none	0.0		0	
191.000	3	---	(sherdlet)	unclassifiable	---	none	0.0		0	
191.001	1	Accokeek coarseware	quartz	undetermined	body	none	0.0		0	
191.002	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
191.003	1	Accokeek	sand	cord-marked	body	none	0.0		0	
191.004	1	Early Woodland	sand	net-impressed	body	none	0.0		0	
191.005	1	Potomac Creek	quartz	cord-marked	body	none	0.0		0	
191.006	1	Early Woodland	sand & quartz	undetermined	body	none	0.0		0	
191.007	1	Early Woodland	sand	smoothed/plain	body	none	0.0		0	
191.008	1	Early Woodland	sand	smoothed/plain	body	none	0.0		0	
191.009	1	Townsend	sand & shell	undetermined	body	none	0.0		0	
191.010	1	UST	shell	smoothed/plain	body	none	0.0		0	
191.011	1	Townsend	shell	smoothed/plain	body	none	0.0		0	
191.012	1	unknown	shell	undetermined	body	none	0.0		0	
191.013	1	Townsend	shell	undetermined	body	none	0.0		0	
192.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
192.002	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
192.003	1	Early Woodland	sand	undetermined	body	none	0.0		0	
192.004	1	Early Woodland	sand	undetermined	body	none	0.0		0	
193.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
193.001	1	Early Woodland	sand	undetermined	base	none	0.0		0	
193.002	1	Early Woodland	sand & shell	undetermined	body	none	0.0		0	
193.003	1	Early Woodland	sand & quartz	undetermined	body	none	0.0		0	
194.001	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
195.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
197.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
198.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
199.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
203.001	1	Potomac Creek	sand & quartz	smoothed/plain	base	none	0.0		0	
203.002	1	unknown	sand	cord-marked	body	none	0.0		0	
208.001	1	Townsend	shell	smoothed/plain	body	incised	0.0		0	
209.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
210.001	1	Potomac Creek	quartz	cord-marked	body	none	0.0		0	
213.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
213.003	1	unknown	sand	cord-marked	body	none	0.0		0	
216.001	1	Accokeek	sand	cord-marked	rim	none	0.0		0	
219.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
220.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
221.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
221.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
225.001	1	UST	shell	undetermined	body	none	0.0		0	
225.002	1	Townsend	shell	undetermined	body	none	0.0		0	
225.003	1	Early Woodland	sand & quartz	undetermined	body	none	0.0		0	
226.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
226.001	1	Townsend	shell	undetermined	body	none	0.0		0	
226.002	1	Townsend	shell	fabric-impressed	body	none	0.0		0	
226.003	1	Moyaone	sand	smoothed/plain	body	none	0.0		0	
228.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
235.000	4	---	(sherdlet)	unclassifiable	---	none	0.0		0	
235.001	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
235.002	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
235.003	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
235.004	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
235.005	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
235.006	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
236.001	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
236.002	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
236.003	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
236.004	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
236.005	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
236.006	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
236.007	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
236.008	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
237.000	5	Accokeek V #1	(sherdlet)	unclassifiable	---	none	0.0		0	
237.001	1	Accokeek	quartz	smoothed/plain	body	none	0.0		0	
237.002	1	Potomac Creek Plain	quartz	smoothed/plain	body	none	0.0		0	
237.003	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
237.004	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
237.005	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
237.006	1	Accokeek V #1	sand	cord-marked	body	none	0.0		0	
237.007	1	Townsend	finely-crushed oyster shell	smoothed/plain	body	none	0.0		0	
237.008	1	Accokeek	sand	cord-marked	body	none	0.0		0	
237.009	1	Moyaone Incised	sand	smoothed/plain	body	incised	0.0		0	
237.010	1	V #1	sand	cord-marked	body	none	0.0		0	
237.011	1	V #1	sand	cord-marked	body	none	0.0		0	
237.012	1	V #1	sand	cord-marked	body	none	0.0		0	
238.001	1	V #1	sand	cord-marked	body	none	0.0		0	
240.001	1	V #1	sand	cord-marked	body	none	0.0		0	
240.002	1	V #1	sand	cord-marked	body	none	0.0		0	
240.003	1	V #1	sand	cord-marked	body	none	0.0		0	
241.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
242.001	1	V #1	sand	cord-marked	body	none	0.0		0	
243.001	1	V #1	sand	cord-marked	body	none	0.0		0	
244.001	1	V #1	sand	cord-marked	body	none	0.0		0	
245.001	1	V #1	sand	cord-marked	body	none	0.0		0	
246.001	1	V #1	sand	cord-marked	body	none	0.0		0	
247.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
248.001	1	V #1	sand	cord-marked	body	none	0.0		0	
249.001	1	V #1	sand	cord-marked	body	none	0.0		0	
250.001	1	V #1	sand	cord-marked	body	none	0.0		0	
251.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
252.001	1	V #1	sand	cord-marked	body	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
253.001	1	V #1	sand	cord-marked	body	none	0.0		0	
254.001	1	V #1	sand	cord-marked	body	none	0.0		0	
255.001	1	V #1	sand	cord-marked	body	none	0.0		0	
256.001	1	V #1	sand	cord-marked	body	none	0.0		0	
257.001	1	V #1	sand	cord-marked	body	none	0.0		0	
258.001	1	V #1	sand	cord-marked	body	none	0.0		0	
259.001	1	V #1	sand	cord-marked	body	none	0.0		0	
260.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
261.001	1	V #1	sand	cord-marked	rim	none	0.0		0	
265.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
267.001	1	V #1	sand	cord-marked	body	none	0.0		0	
268.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
270.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
271.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
272.000	1	Accokeek coarseware	(sherdlet)	cord-marked	---	none	0.0		0	
272.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
273.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
274.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
276.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
277.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
278.001	1	V #1	sand	cord-marked	body	none	0.0		0	
279.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
280.001	1	V #1	sand	cord-marked	body	none	0.0		0	
282.001	1	Accokeek coarseware	quartz	undetermined	body	none	0.0		0	
282.002	1	Early Woodland	sand	cord-marked	body	none	0.0		0	
282.003	1	Potomac Creek	sand & quartz	undetermined	body	none	0.0		0	
282.004	1	Accokeek	sand	cord-marked	body	none	0.0		0	
282.005	1	Accokeek coarseware	quartz	smoothed/plain	body	none	0.0		0	
282.006	1	Accokeek coarseware	sand	smoothed/plain	body	none	0.0		0	
283.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
283.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
283.000	4	---	(sherdlet)	unclassifiable	---	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
283.001	1	UST	shell	undetermined	body	none	0.0		0	
283.002	1	Early Woodland	sand	undetermined	body	none	0.0		0	
283.003	1	Early Woodland	sand	undetermined	body	none	0.0		0	
283.004	1	Townsend	shell	undetermined	body	none	0.0		0	
284.001	1	Townsend	shell	fabric-impressed	body	none	0.0		0	
285.001	1	Townsend	shell	fabric-impressed	body	none	0.0		0	
286.001	1	Fabric Impressed grit-tempered	sand & quartz	fabric-impressed	body	none	0.0		0	
288.001	1	Accokeek	sand	undetermined	body	none	0.0		0	
289.001	1	Accokeek	sand	undetermined	body	none	0.0		0	
290.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
291.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
292.001	1	Early Woodland	sand & quartz	undetermined	body	none	0.0		0	
295.001	1	Early Woodland	sand	undetermined	body	none	0.0		0	
296.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
297.001	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
300.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
300.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
300.001	1	Accokeek coarseware	sand	cord-marked	body	none	0.0		0	
301.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
301.000	8	---	(sherdlet)	unclassifiable	---	none	0.0		0	
301.001	1	Early Woodland	sand	cord-marked	body	none	0.0		0	
301.002	1	Early Woodland	sand	undetermined	body	none	0.0		0	
301.003	1	Early Woodland	sand & quartz	undetermined	body	none	0.0		0	
301.004	1	unknown	sand	undetermined	body	none	0.0		0	
301.005	1	unknown	sand	undetermined	body	none	0.0		0	
301.006	1	UST	shell	smoothed/plain	body	none	0.0		0	
301.007	1	Early Woodland	sand & quartz	cord-marked	body	none	0.0		0	
301.008	1	unknown	sand	undetermined	body	none	0.0		0	
301.009	1	unknown	sand	undetermined	body	none	0.0		0	
301.010	1	Accokeek	sand	undetermined	body	none	0.0		0	
301.011	1	unknown	sand	undetermined	body	none	0.0		0	
302.000	1	---	(sherdlet)	cord-marked	---	none	0.0		0	
302.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
302.001	1	Accokeek	sand & quartz	undetermined	body	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
302.002	1	Accokeek	sand	cord-marked	body	none	0.0		0	
302.003	1	Accokeek coarseware	quartz	undetermined	body	none	0.0		0	
302.004	1	Early Woodland	sand & quartz	undetermined	body	none	0.0		0	
302.005	1	Early Woodland	sand	undetermined	body	none	0.0		0	
302.006	1	Accokeek	sand	cord-marked	body	none	0.0		0	
302.007	1	Accokeek	sand	cord-marked	body	none	0.0		0	
303.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
304.001	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
305.001	1	Early Woodland	sand	net-impressed	body	none	0.0		0	
306.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
306.000	5	---	(sherdlet)	unclassifiable	---	none	0.0		0	
306.001	1	Accokeek Coarseware	quartz	undetermined	body	none	0.0		0	
306.002	1	Accokeek	sand	cord-marked	body	none	0.0		0	
306.003	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
307.001	1	Accokeek	sand & quartz	cord-marked	body	none	0.0		0	
308.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
309.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
309.001	1	Accokeek	sand	cord-marked	body	none	0.0		0	
309.002	1	UST	shell	undetermined	body	none	0.0		0	
309.003	1	Accokeek coarseware	quartz	smoothed/plain	body	none	0.0		0	
310.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
310.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
310.001	1	Mockley	shell	net-impressed	body	none	0.0		0	
310.002	1	Potomac Creek	sand & quartz	cord-marked	body	none	0.0		0	
310.003	1	UST	shell	undetermined	body	none	0.0		0	
311.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
311.001	1	Accokeek coarseware	quartz	undetermined	body	none	0.0		0	
317.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
317.001	1	Potomac Creek	sand & quartz	smoothed/plain	base	none	0.0		0	
317.002	1	Potomac Creek	sand & quartz	smoothed/plain	body	none	0.0		0	
317.003	1	Potomac Creek	sand	smoothed/plain	body	none	0.0		0	
317.004	1	Early Woodland	sand	net-impressed	body	none	0.0		0	
317.005	1	UST	shell	undetermined	body	none	0.0		0	
318.001	1	unknown	sand & quartz	undetermined	body	none	0.0		0	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
318.002	1	Mockley	shell	undetermined	body	none	0.0		0	
320.001	1	Accokeek coarseware	sand	cord-marked	body	none	0.0		0	
321.001	1	Accokeek Coarseware	sand	cord-marked	rim	none	0.0		0	
331.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
331.001	1	unknown	sand	undetermined	body	none	0.0		0	
331.002	1	Early Woodland	sand & quartz	undetermined	body	none	0.0		0	
332.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
332.001	1	UST	shell	undetermined	body	none	0.0		0	
332.002	1	Mockley	shell	undetermined	body	none	0.0		0	
333.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
335.001	1	Early Woodland	quartz	undetermined	body	none	0.0		0	
337.001	1	Accokeek coarseware	sand & quartz	cord-marked	body	none	0.0		0	
338.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
339.000	2	---	(sherdlet)	unclassifiable	---	none	0.0		0	
346.000	1	---	(sherdlet)	unclassifiable	---	none	0.0		0	
346.001	1	Accokeek coarseware	sand	undetermined	body	none	0.0		0	
349.001	1	Accokeek coarseware	quartz	cord-marked	body	none	0.0		0	
353.001	1	Mockley	coarse-crushed oyster shell	undetermined	body	none	0.0		0	
354.001	1	Accokeek	quartz	cord-marked	body	none	0.0		0	
354.002	1	Accokeek	quartz	cord-marked	body	none	0.0		0	
355.000	4	---	(sherdlet)	---	---	---	0.0		0	S
355.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.3	gritty friable	30	
355.002	1	Moyaone Incised(?)	sand	undetermined	body	incised	6.8	fine compact	50	
355.003	1	Early Woodland	sand & quartz	cord-marked	body	none	5.7	fine compact	20	
355.004	1	Accokeek	sand & quartz	unclassifiable	body	undet	0.0	sandy - (slight)	50	
355.005	1	Accokeek	sand & quartz	undetermined	body	none	7.4	sandy friable	40	
355.006	1	Early Woodland	sand	cord-marked	body	none	5.6	gritty friable	20	
355.007	1	Townsend	finely-crushed oyster shell	undetermined	body	undet	0.0	gritty	5	
355.008	1	UST	sand & shell	smoothed/plain	body	none	7.2	"chalky"	20	
355.009	1	Accokeek	sand & quartz	undetermined	body	undet	7.0	fine sand - (slight)	50	
357.001	1	UST	oyster shell	undetermined	unknown	undet	4.7	med. coarse sand	20	
357.002	1	Accokeek	sand & quartz	undetermined	body	undet	4.6	sandy - (slight)	30	
358.000	1	Accokeek Coarseware	sand & quartz	cord-marked	body	cord	6.6	gritty friable	30	S
360.000	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	gritty friable	25	S

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
362.000	1	UST	oyster shell	undetermined	body	undet	7.5	sandy-(slight), fri.	5	
365.000	1	Accokeek	sand & quartz	undetermined	body	undet	9.2	very gritty friable	50	
366.000	1	---	(sherdlet)	---	---	---	0.0		0	
367.000	1	Accokeek	sand & quartz	unclassifiable	body	undet	8.0	sandy - (slight)	10	
371.000	1	Townsend	oyster shell	smoothed/plain	body	none	4.7	sandy - (slight)	5	
375.000	1	Accokeek	sand & quartz	cord-marked	rim	undet	6.5	gritty compact	25	S
377.000	1	Accokeek	sand & quartz	cord-marked	body	undet	8.7	gritty compact	25	S
381.000	3	---	(sherdlet)	---	---	---	0.0		0	
382.000	2	---	(sherdlet)	---	---	---	0.0		0	
382.001	1	Accokeek	sand & quartz	cord-marked	body	undet	7.5	gritty compact	25	
386.000	2	---	(sherdlet)	---	---	---	0.0		0	
395.000	1	---	(sherdlet)	undetermined	---	---	0.0		0	
404.001	1	Townsend	sand & shell	fabric-impressed	body	undet	6.9	fine sandy compact	30	
404.002	1	Accokeek	quartz	cord-marked	body	undet	5.5	sandy friable	15	S
404.003	1	Townsend	sand & shell	undetermined	body	undet	6.1	fine sandy compact	30	
404.004	1	Accokeek	sand & quartz	undetermined	body	undet	6.5	gritty friable	25	S
404.005	1	UST	shell	smoothed/plain	body	none	7.8	clayey	5	
404.006	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	gritty friable	20	S
404.007	1	Accokeek	sand & quartz	undetermined	rim	undet	0.0	gritty sandy	30	
404.008	1	Accokeek	sand & quartz	cord-marked	body	none	0.0	gritty friable	20	S
405.001	1	Accokeek Coarseware	quartz	cord-marked	body	none	6.2	gritty friable	15	S
405.002	1	Accokeek Coarseware	quartz	cord-marked	body	none	6.2	gritty friable	15	S
407.001	1	Accokeek Coarseware	sand & quartz	cord-marked	body	none	6.6	sandy friable	20	S
409.000	2	---	(sherdlet)	---	---	---	0.0		0	
425.000	1	Accokeek	sand & quartz	unclassifiable	body	none	6.1	sandy friable	40	
427.000	1	---	(sherdlet)	---	---	---	0.0		0	
442.001	1	Accokeek Coarseware	sand & quartz	cord-marked	body	none	6.9	gritty	30	S
443.001	1	UST	oyster shell	fabric-impressed	body	none	9.4	clayey	5	
448.000	1	---	(sherdlet)	---	---	---	0.0		0	
453.001	1	Accokeek	quartz	cord-marked	body	none	5.8	clayey friable	5	
462.001	1	Accokeek	sand & quartz	cord-marked	rim	cord	6.0	gritty friable	20	
465.000	2	---	(sherdlet)	---	---	---	0.0		0	
465.001	1	UST	oyster shell	undetermined	body	none	7.5	clayey	5	
465.002	1	UST	oyster shell	fabric-impressed	body	none	7.9	clayey	5	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
465.003	1	Accokeek	sand & quartz	cord-marked	rim	none	7.9	sandy friable	50	S
465.004	1	Accokeek	sand & quartz	cord-marked	rim	none	6.8	sandy friable	40	
465.005	1	UST	oyster shell	fabric-impressed	body	none	7.4	clayey	5	
465.006	1	UST	oyster shell	undetermined	body	none	7.5	clayey	5	
465.007	1	UST	oyster shell	unclassifiable	unknown	---	0.0	clayey	5	
465.008	1	Townsend	oyster shell	undetermined	body	none	6.2	compact	10	
467.000	1	---	(sherdlet)	---	---	---	0.0		0	
467.001	1	Townsend	oyster shell	fabric-impressed	body	none	6.5	clayey compact	10	
468.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.9	sandy friable	50	
471.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.2	gritty	20	
472.000	1	---	(sherdlet)	---	---	---	0.0		0	
474.000	1	---	(sherdlet)	---	---	---	0.0		0	
474.001	1	---	undetermined	unclassifiable	unknown	none	0.0	sandy - (slight)	10	
485.000	1	Accokeek	sand & quartz	cord-marked	body	cord	9.0	gritty friable	20	
493.001	1	Mockley Net-Impressed	oyster shell	net-impressed	body	none	7.0	clayey friable	5	
495.001	1	UST	oyster shell	unclassifiable	body	none	7.4	clayey friable	5	
533.000	3	---	(sherdlet)	---	---	---	0.0		0	
533.001	1	UST	oyster shell	undetermined	body	none	6.2	clayey friable	10	
533.002	1	UST	oyster shell	undetermined	body	none	7.7	clayey friable	5	
533.003	1	UST	oyster shell	fabric-impressed	body	none	8.9	clayey friable	5	
533.004	1	UST	oyster shell	unclassifiable	body	none	9.9	clayey friable	10	
534.002	1	UST	oyster shell	fabric-impressed	body	pseud cord	9.8	clayey friable	10	
535.000	1	---	(sherdlet)	---	---	---	0.0		0	
540.001	1	Accokeek	sand & quartz	cord-marked	body	cord	5.7	gritty friable	20	S
544.001	1	UST	oyster shell	unclassifiable	body	none	6.0	gritty friable	5	
544.002	1	Accokeek	sand & quartz	cord-marked	body	none	6.4	gritty friable	25	S
544.003	1	UST	oyster shell	undetermined	body	none	9.3	clayey friable	5	
544.004	1	UST	oyster shell	undetermined	body	none	6.8	clayey compact	10	
546.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.6	gritty friable	25	S
547.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.8	gritty friable	25	S
551.001	1	Accokeek	sand & quartz	unclassifiable	body	none	6.5	sandy friable	50	
556.001	1	Accokeek Coarseware	sand & quartz	cord-marked	body	none	7.8	gritty clayey friabl	15	S
558.001	1	Accokeek Coarseware	sand & quartz	cord-marked	body	none	7.5	gritty clayey friabl	15	S
564.001	1	Accokeek	sand & quartz	cord-marked	body	none	5.4	sandy compact	25	Z

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
566.001	1	Accokeek Coarseware	sand & quartz	cord-marked	body	none	6.5	gritty clayey friabl	15	S
569.001	1	Accokeek	sand & quartz	undetermined	body	none	6.2	sandy friable	50	
570.001	2	Accokeek	sand & quartz	cord-marked	body	none	5.9	sandy friable	50	S
587.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.6	sandy friable	40	S
591.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.0	sandy friable	30	
595.000	2	---	(sherdlet)	---	---	---	0.0		0	
595.002	1	Accokeek	sand & quartz	cord-marked	body	none	6.9	gritty friable	20	S
595.003	1	Accokeek	sand & quartz	cord-marked	body	none	6.9	gritty friable	20	S
595.004	1	Accokeek	sand & quartz	smoothed/plain	body	none	8.3	sandy friable	35	
598.000	1	Accokeek	sand & quartz	cord-marked	body	undet	7.9	gritty friable	30	Z
599.000	1	---	(sherdlet)	---	---	---	0.0		0	
599.001	1	Accokeek	sand & quartz	undetermined	body	none	7.3	gritty friable	40	
600.000	1	Accokeek	sand & quartz	undetermined	body	none	7.2	gritty compact	20	
602.001	1	Accokeek	sand & quartz	smoothed/plain	body	none	7.8	sandy friable	40	
604.000	1	Accokeek Coarseware	sand & quartz	cord-marked	body	none	9.1	sl.sandy compact	20	S
619.000	7	---	(sherdlet)	---	---	---	0.0		0	
619.002	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	sandy compact	40	
619.003	1	Accokeek	sand & quartz	undetermined	body	none	7.4	sandy friable	50	
619.004	1	Accokeek	sand & quartz	undetermined	body	none	7.0	clayey friable	20	
619.005	1	Accokeek	sand & quartz	undetermined	body	none	8.0	sandy friable	50	
619.006	1	Accokeek	sand & quartz	undetermined	body	none	7.4	sandy friable	50	
619.007	1	Townsend	oyster shell	undetermined	body	none	10.6	clayey friable	10	
619.008	1	Townsend	oyster shell	smoothed/plain	body	none	6.2	clayey friable	10	
620.001	1	Mockley	oyster shell	smoothed/plain	base	none	10.9	clayey compact	5	
621.001	1	Mockley	oyster shell	undetermined	base	none	16.7	clayey compact	5	
622.001	1	Mockley	oyster shell	smoothed/plain	body	none	9.0	sl. sandy compact	15	
623.002	1	Mockley	oyster shell	undetermined	body	none	8.6	clayey sl.friable	10	
623.003	1	Accokeek	sand & quartz	undetermined	body	none	7.0	sandy friable	50	Z
631.000	1	---	(sherdlet)	---	---	---	0.0		0	
638.000	1	---	(sherdlet)	---	---	---	0.0		0	
639.000	1	Mockley Net-Impressed	oyster shell	net-impressed	body	undet	11.3	sl. sandy compact	10	
640.000	2	---	(sherdlet)	---	---	---	0.0		0	
646.001	1	Accokeek Coarseware	sand & quartz	cord-marked	body	none	10.4	sandy friable	25	
657.001	1	Accokeek	sand & quartz	undetermined	body	undet	7.4	sandy friable	15	S

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
658.001	1	Townsend(?)	oyster shell	undetermined	body	undet	7.7	sl. sandy friable	10	
663.000	1	---	sand & quartz	undetermined	body	undet	3.9	sandy friable	40	
665.002	1	Accokeek	sand & quartz	cord-marked	rim	none	7.5	sl. sandy friable	20	S
665.003	1	UST	oyster shell	smoothed/plain	body	none	7.1	clayey compact	5	
665.004	1	Mockley	oyster shell	fabric-impressed	rim	undet	9.4	clayey compact	5	
665.005	1	Mockley	oyster shell	smoothed/plain	body	none	9.2	clayey compact	5	
665.006	1	Accokeek	undetermined	cord-marked	body	none	6.5	sandy friable	30	
667.000	1	---	(sherdlet)	---	---	---	0.0		0	
670.000	1	---	(sherdlet)	---	---	---	0.0		0	
670.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.4	sandy friable	30	
670.002	1	Accokeek	sand & quartz	unclassifiable	body	none	5.7	sandy friable	50	
672.002	1	Mockley	oyster shell	unclassifiable	body	none	9.0	sl. sandy compact	10	
675.000	1	---	(sherdlet)	---	---	---	0.0		0	
676.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	sandy friable	50	
677.001	1	Accokeek	sand & quartz	smoothed/plain	body	none	7.8	sandy friable	50	
679.001	1	Early Woodland	sand & quartz	net-impressed	body	none	7.4	sandy friable	30	
680.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.0	sl. sandy friable	20	
681.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.2	sandy friable	30	
682.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.9	sandy friable	40	
685.001	1	Accokeek	sand & quartz	undetermined	body	undet	7.5	sandy friable	50	
686.000	2	Accokeek	(sherdlet)	---	---	---	0.0		0	
686.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.3	sandy friable	40	
688.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.0	sandy friable	50	
690.001	1	Accokeek	sand & quartz	undetermined	rim	undet	8.2	sandy friable	40	
691.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.5	sandy friable	50	
702.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.1	sandy friable	30	S
703.001	1	Accokeek Coarseware	sand & quartz	cord-marked	base	none	10.0	sl. sandy friable	20	S
705.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.6	sandy friable	40	
706.000	1	---	(sherdlet)	---	---	---	0.0		0	
706.002	1	Mockley	oyster shell	smoothed/plain	body	none	10.3	clayey friable	5	
706.003	1	Accokeek	sand & quartz	unclassifiable	body	none	8.6	sandy friable	30	
706.004	1	Accokeek	sand & quartz	smoothed/plain	body	none	7.5	sandy friable	50	
708.000	2	---	(sherdlet)	---	---	---	0.0		0	
708.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	gritty friable	15	S

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
708.002	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	50	
710.001	1	Early Woodland	sand & quartz	net-impressed	body	none	6.8	gritty friable	15	
711.001	3	Accokeek	sand & quartz	cord-marked	body	none	6.8	gritty friable	20	
712.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.8	gritty friable	20	
713.001	1	Accokeek	sand & quartz	cord-marked	body	cord	6.0	sandy friable	30	S
714.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	sandy compact	30	
715.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	gritty compact	25	
717.001	2	Accokeek	sand & quartz	cord-marked	rim	cord	6.3	sandy friable	50	
719.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.4	gritty friable	40	Z
721.001	2	Accokeek	sand & quartz	cord-marked	rim	none	8.0	gritty friable	50	S
724.000	4	---	(sherdlet)	---	---	---	0.0		0	
724.001	1	Accokeek	sand & quartz	smoothed/plain	body	none	8.8	gritty friable	50	
724.002	1	Accokeek	sand & quartz	smoothed/plain	body	none	9.0	gritty friable	50	
724.003	1	Accokeek	sand & quartz	smoothed/plain	body	none	7.7	gritty friable	50	
724.004	1	Accokeek	sand & quartz	smoothed/plain	body	none	8.7	gritty friable	50	
724.005	1	Accokeek	sand & quartz	undetermined	body	undet	7.8	gritty friable	50	
724.006	1	Accokeek	sand & quartz	undetermined	body	undet	8.4	sandy friable	40	
724.007	1	Accokeek	sand & quartz	undetermined	body	undet	8.0	sandy friable	40	
726.001	1	Popes Creek	sand & quartz	net-impressed	body	undet	7.4	gritty compact	20	
727.001	1	Accokeek	sand & quartz	cord-marked	body	none	9.3	gritty friable	50	
729.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	gritty friable	50	S
730.001	1	Accokeek	sand	cord-marked	body	none	8.3	gritty friable	50	S
731.001	1	Accokeek Coarseware	sand	cord-marked	body	none	8.0	gritty compact	25	S
732.001	1	Accokeek	sand & quartz	undetermined	body	undet	6.6	gritty friable	45	S
733.001	1	Accokeek	sand & quartz	cord-marked	body	undet	7.5	gritty friable	40	
734.001	1	Accokeek	sand & quartz	net-impressed	body	none	6.0	clayey compact	10	S
735.001	1	Accokeek	sand & quartz	unclassifiable	body	undet	8.4	sandy friable	50	
736.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	gritty friable	30	S
738.001	1	Accokeek	sand & quartz	undetermined	body	undet	6.0	gritty friable	25	S
739.000	3	---	(sherdlet)	---	---	---	0.0		0	
739.001	1	Accokeek	sand	smoothed/plain	unknown	none	9.4	sandy friable	25	
741.001	1	Accokeek Coarseware	sand & quartz	cord-marked	body	none	8.0	gritty compact	20	S
742.001	1	Accokeek	sand & quartz	cord-marked	body	none	9.0	gritty friable	40	S
743.001	1	Accokeek	sand & quartz	cord-marked	body	none	9.0	sandy friable	50	S

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
744.001	1	Early Woodland	sand & quartz	cord-marked	body	none	8.4	sandy friable	50	
747.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	gritty compact	20	S
750.001	1	Early Woodland	sand & quartz	cord-marked	body	none	7.2	sandy friable	50	S
751.001	2	Popes Creek	sand & quartz	net-impressed	body	none	8.1	sandy friable	50	S
752.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.5	fine sandy compact	25	
752.002	1	Accokeek	sand & quartz	cord-marked	body	none	6.6	gritty friable	30	
754.001	1	Accokeek Coarseware	sand & quartz	cord-marked	body	none	7.5	gritty compact	25	S
755.000	3	---	(sherdlet)	---	---	---	0.0		0	
756.000	1	Accokeek	sand & quartz	cord-marked	body	none	7.1	gritty friable	40	
757.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	gritty friable	30	S
757.002	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	fine sandy friable	25	S
757.003	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	gritty friable	30	S
758.000	1	---	(sherdlet)	---	---	---	0.0		0	
759.001	1	Marcey Creek	steatite	smoothed/plain	base	none	14.5	gritty soapy friable	5	
760.003	1	Accokeek Coarseware	sand & quartz	cord-marked	body	none	6.1	gritty friable	20	
764.001	1	Mockley	quartz & shell	net-impressed	body	none	9.6	clayey friable	5	
767.000	1	---	(sherdlet)	---	---	---	0.0		0	
769.001	1	Early Woodland	sand & quartz	cord-marked	body	none	5.8	sandy friable	40	
771.001	1	Popes Creek	sand & quartz	net-impressed	rim	none	6.5	sandy friable	50	S
773.001	1	Early Woodland	sand & quartz	undetermined	body	undet	9.3	sandy friable	40	
773.002	1	Early Woodland	sand	unclassifiable	body	undet	7.4	sandy friable	40	
774.001	1	Popes Creek	sand & quartz	net-impressed	body	none	6.8	sandy friable	50	
775.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	9.8	sandy friable	40	
776.000	1	---	(sherdlet)	---	---	---	0.0		0	
777.001	1	Early Woodland	sand & quartz	undetermined	body	undet	6.3	sandy friable	40	
778.001	1	Popes Creek	sand & quartz	net-impressed	body	none	7.2	sandy friable	50	S
778.002	1	Townsend	oyster shell	smoothed/plain	rim	pinch/scal	5.1	clayey compact	5	
779.000	1	Accokeek	sand & quartz	unclassifiable	body	undet	0.0	clayey friable	5	
780.000	1	Townsend	sand & quartz	smoothed/plain	body	none	6.2	clayey compact	5	
781.001	1	Accokeek	sand & quartz	cord-marked	rim	incised	6.0	sandy compact	25	S
782.000	1	Early Woodland	sand & quartz	unclassifiable	body	none	5.9	sandy friable	50	
783.000	6	---	(sherdlet)	---	---	---	0.0		0	
783.001	1	Townsend	oyster shell	fabric-impressed	body	none	8.1	clayey mod. compact	5	
783.002	1	Accokeek	sand & quartz	cord-marked	body	none	8.4	gritty friable	15	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
783.003	1	Accokeek	sand & steatite	undetermined	body	undet	5.3	gritty friable	30	
783.004	1	Early Woodland	sand & quartz	undetermined	body	undet	7.0	sandy friable	50	
783.005	1	Early Woodland	sand & quartz	undetermined	body	undet	6.4	gritty friable	30	
783.006	1	Early Woodland	sand & quartz	undetermined	body	undet	6.7	gritty friable	30	
783.007	1	Early Woodland	sand & quartz	undetermined	rim	undet	5.4	gritty friable	30	
783.008	1	Early Woodland	sand & quartz	unclassifiable	body	undet	6.2	gritty friable	30	
783.009	1	Accokeek	undetermined	unclassifiable	body	undet	4.7	gritty friable	30	
784.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.3	sandy friable	40	
785.001	1	Accokeek	sand & quartz	cord-marked	rim	none	5.8	sandy friable	40	
786.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.3	sandy friable	40	
787.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.3	friable	5	
789.001	1	Accokeek	sandstone	undetermined	rim	none	7.0	gritty friable	20	
790.001	1	Accokeek	sand & quartz	cord-marked	body	none	5.3	sandy friable	40	
792.001	1	Accokeek	sand & quartz	cord-marked	body	none	4.4	sandy friable	40	S
793.001	1	Accokeek	sand & quartz	cord-marked	rim	cord	7.3	sandy friable	40	
795.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.3	sandy friable	40	S
795.002	1	Early Woodland	sand & quartz	undetermined	rim	none	5.0	sandy friable	40	
795.003	1	Early Woodland	sand & quartz	cord-marked	body	none	7.9	gritty	10	
796.000	2	---	(sherdlet)	---	---	---	0.0		0	
796.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.3	sandy friable	40	
797.001	1	Accokeek	sand & quartz	cord-marked	body	none	5.8	sandy friable	40	
798.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.3	sandy friable	20	S
799.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.7	sandy friable	40	
801.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.2	sandy friable	40	
802.001	1	Accokeek	sand & quartz	cord-marked	rim	none	7.2	sandy friable	40	S
803.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.3	sandy friable	40	S
804.001	1	---	sandstone	undetermined	body	none	6.0	gritty friable	20	
805.001	1	Accokeek	sand & quartz	undetermined	body	none	7.5	sandy friable	40	
806.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.4	sandy friable	40	
807.001	1	Accokeek	sand & quartz	undetermined	body	none	7.5	sandy friable	40	
808.001	1	Accokeek	sand	cord-marked	body	none	5.5	sandy friable	40	
808.002	1	Accokeek	sand	cord-marked	body	none	5.7	sandy friable	40	
808.003	1	Accokeek	sand & quartz	cord-marked	body	none	7.4	sandy friable	40	
808.004	1	UST	oyster shell	undetermined	body	undet	7.8	clayey friable	5	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
809.001	1	Accokeek	sand & quartz	cord-marked	body	none	5.5	sandy friable	40	
810.001	1	Accokeek	sand & quartz	cord-marked	rim	none	7.0	sandy friable	40	
811.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.7	sandy friable	40	
812.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.8	sandy friable	40	
813.001	1	Early Woodland	sand & quartz	net-impressed	body	none	6.7	sandy friable	40	
814.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.7	sandy friable	40	
815.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	40	
816.001	1	Popes Creek	sand & quartz	net-impressed	body	none	7.5	sandy friable	40	S
817.001	1	Early Woodland	sand & quartz	undetermined	body	undet	7.4	sandy friable	40	
818.001	1	Accokeek	sand & quartz	cord-marked	body	none	5.5	sandy friable	40	
819.001	1	---	sand & quartz	undetermined	body	none	5.5	sandy friable	40	
820.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.0	sandy friable	40	
824.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	40	
825.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.4	sandy friable	40	S
826.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.6	sandy friable	40	
827.001	1	Early Woodland	sand & quartz	undetermined	body	none	6.8	sandy friable	40	
830.000	1	---	(sherdlet)	---	---	---	0.0		0	
830.002	1	Accokeek	sand & quartz	cord-marked	body	none	5.9	sandy friable	40	
830.003	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	40	
830.004	1	---	undetermined	unclassifiable	body	undet	3.8	clayey	5	
831.001	1	Townsend	quartz & shell	fabric-impressed	body	undet	7.2	clayey gritty	5	
832.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.7	sandy friable	20	
833.001	1	Early Woodland	sand & quartz	undetermined	body	undet	6.8	sandy friable	30	
834.001	1	---	sandstone	undetermined	body	undet	6.4	clayey gritty	5	
835.001	1	Accokeek	sand & quartz	cord-marked	body	none	5.9	sandy friable	40	
836.001	1	---	sand	undetermined	body	undet	5.2	gritty clayey	5	
838.001	1	Early Woodland	sand & quartz	undetermined	body	undet	7.7	sandy friable	20	
839.001	1	---	sandstone	undetermined	body	undet	6.8	gritty clayey	5	
840.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	sandy friable	30	
842.001	1	Early Woodland	sand & quartz	undetermined	body	undet	5.4	sandy friable	40	
843.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.6	sandy friable	30	
844.001	1	---	sand & quartz	cord-marked	body	none	8.0	sandy friable	30	
845.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.8	sandy friable	30	
846.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.2	sandy friable	30	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
847.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.5	sandy friable	30	
848.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.4	sandy friable	40	
849.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.4	sandy friable	30	
852.001	1	Accokeek	sand & quartz	cord-marked	body	none	5.9	sandy friable	20	
852.002	1	Accokeek	sand & quartz	cord-marked	body	none	7.5	sandy friable	20	S
852.003	1	Early Woodland	sand & quartz	undetermined	body	undet	5.4	sandy friable	30	S
852.004	1	Early Woodland	sand & quartz	undetermined	body	undet	6.2	sandy friable	30	S
853.000	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	20	S
854.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	30	S
855.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.9	sandy friable	20	S
856.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.5	sandy friable	30	
859.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	30	
860.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.5	sandy friable	40	
861.001	1	Early Woodland	sand & quartz	undetermined	body	undet	8.4	sandy friable	40	
862.001	1	Early Woodland	sand & quartz	undetermined	body	undet	7.8	sandy friable	40	
863.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.4	sandy friable	40	S
864.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.4	sandy friable	40	
865.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.2	sandy friable	40	
866.001	1	Early Woodland	sand & quartz	undetermined	body	none	8.8	sandy friable	40	
867.000	1	---	(sherdlet)	---	---	---	0.0		0	
871.001	3	Accokeek	sand & quartz	cord-marked	rim	none	7.7	sandy friable	30	S
885.000	1	---	(sherdlet)	---	---	---	0.0		0	
888.001	1	---	sandstone	undetermined	body	undet	6.8	gritty	20	
891.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.6	sandy friable	40	
893.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	7.8	sandy friable	40	
897.000	1	---	(sherdlet)	---	---	---	0.0		0	
897.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	gritty friable	20	
897.002	1	---	oyster shell	undetermined	body	undet	8.8	clayey	5	
899.000	1	---	(sherdlet)	---	---	---	0.0		0	
899.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	30	
899.002	1	Accokeek	sand & quartz	cord-marked	body	none	6.5	gritty friable	20	S
899.003	1	Accokeek	sand & quartz	cord-marked	body	none	6.4	gritty friable	20	
899.004	1	---	sand & quartz	undetermined	body	none	5.4	sandy friable	30	
899.005	1	---	sand & quartz	undetermined	body	none	4.3	sandy friable	40	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
902.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	gritty friable	30	
903.001	1	Accokeek	quartz	cord-marked	body	none	6.4	gritty friable	10	
904.001	1	---	undetermined	smoothed/plain	body	none	6.2	sandy friable	30	
905.001	3	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	40	S
906.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.3	gritty friable	40	
907.000	4	---	(sherdlet)	---	---	---	0.0		0	
907.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.3	sandy friable	40	
908.001	1	Accokeek	sand & quartz	cord-marked	body	none	9.6	gritty friable	10	
910.001	1	Early Woodland	sand	undetermined	body	undet	5.7	sandy friable	40	
910.002	1	---	sand	unclassifiable	unknown	undet	10.0	gritty	10	
910.003	1	---	sand & shell	unclassifiable	unknown	undet	5.5	clayey	5	
911.001	1	Early Woodland	sand	undetermined	body	undet	5.5	sandy friable	40	
912.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.2	sandy friable	40	
914.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.2	sandy friable	20	
915.000	1	---	(sherdlet)	---	---	---	0.0		0	
917.001	1	Early Woodland	sand & quartz	undetermined	body	undet	6.5	sandy friable	30	
918.001	1	Early Woodland	sand & quartz	undetermined	body	undet	7.0	sandy friable	30	
919.001	1	Accokeek	sand	cord-marked	body	none	6.5	clayey	5	
924.001	1	Early Woodland	sand & quartz	unclassifiable	rim	undet	8.0	sandy friable	40	
925.000	1	---	(sherdlet)	---	---	---	0.0		0	
925.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	5.0	sandy friable	40	
925.002	1	Early Woodland	sand & quartz	unclassifiable	body	undet	5.6	sandy friable	40	
926.001	1	Early Woodland	sand & quartz	unclassifiable	rim	undet	6.7	gritty friable	20	
927.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.8	sandy friable	40	
929.001	1	Selden Island	steatite	cord-marked	body	none	5.4	soapy friable	10	
933.001	1	Accokeek	quartz	cord-marked	body	none	6.9	gritty friable	10	S
934.001	1	Accokeek	steatite	undetermined	rim	undet	6.7	soapy	10	
935.001	1	Early Woodland	sand	undetermined	body	undet	4.8	sandy friable	40	
942.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	5.2	sandy friable	40	
943.001	1	---	oyster shell	unclassifiable	body	undet	6.0	clayey	5	
945.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	gritty friable	10	S
946.001	1	Early Woodland	sand	unclassifiable	body	undet	6.5	sandy friable	40	
947.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	6.5	sandy friable	40	
948.001	1	Early Woodland	sand	unclassifiable	body	undet	5.0	sandy friable	40	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
949.001	1	Accokeek	quartz	cord-marked	body	none	7.4	gritty	10	
951.001	1	---	sand	undetermined	body	none	6.4	gritty friable	20	
951.002	1	Early Woodland	sand & quartz	undetermined	body	none	6.4	sandy friable	30	
951.003	1	---	oyster shell	undetermined	body	undet	8.8	gritty	10	
952.001	1	Riggins(?)	sandstone	undetermined	body	undet	6.0	gritty friable	20	
953.001	1	Accokeek	sand & quartz	cord-marked	rim	undet	8.3	sandy friable	30	S
954.001	1	Early Woodland	sand & quartz	undetermined	body	undet	7.3	sandy friable	30	
955.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	gritty friable	40	
956.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	sandy friable	40	
960.000	1	---	(sherdlet)	---	---	---	0.0		0	
960.000	1	---	(sherdlet)	---	---	---	0.0		0	
960.001	1	Early Woodland	sand	unclassifiable	body	undet	5.5	sandy friable	40	
960.002	1	Early Woodland	sand	unclassifiable	body	undet	3.7	sandy friable	40	
960.003	1	Accokeek	sand & quartz	cord-marked	body	none	6.4	sandy friable	40	
961.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	gritty friable	30	
962.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	7.6	sandy friable	40	
963.001	1	Early Woodland	sand & quartz	undetermined	body	none	8.6	sandy friable	30	
964.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.6	sandy friable	30	S
965.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.3	sandy friable	30	S
966.001	1	Early Woodland	sand & quartz	undetermined	body	undet	8.6	sandy friable	40	
967.001	1	Early Woodland	sand & quartz	undetermined	body	undet	7.8	sandy friable	40	
969.001	1	Early Woodland	sand & quartz	undetermined	body	none	6.8	sandy friable	40	
970.001	1	Early Woodland	sand & quartz	undetermined	body	undet	7.0	sandy friable	40	
971.001	1	Early Woodland	sand & quartz	undetermined	body	undet	9.0	sandy friable	40	
972.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	sandy friable	40	
974.001	1	Early Woodland	sand & quartz	undetermined	rim	undet	8.5	sandy friable	40	
976.001	1	Accokeek	sand & quartz	cord-marked	body	undet	8.2	sandy friable	40	S
977.001	1	Accokeek	sand & quartz	cord-marked	body	undet	8.2	sandy friable	40	
979.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	9.5	sandy friable	40	
979.002	1	Accokeek	sand & quartz	cord-marked	body	none	5.5	sandy friable	30	
980.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.5	sandy friable	40	
981.001	1	---	sandstone	net-impressed	body	undet	6.0	gritty compact	20	
982.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	9.0	sandy friable	40	
983.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.1	gritty friable	30	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
984.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	gritty friable	30	
985.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	6.0	sandy friable	40	
986.001	1	Accokeek	undetermined	cord-marked	body	none	7.2	sandy friable	30	
987.001	1	Accokeek	sand & quartz	cord-marked	rim	none	8.0	gritty friable	30	
988.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.2	gritty friable	30	
989.000	4	---	(sherdlet)	---	---	---	0.0		0	
989.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.2	sandy friable	40	
989.002	1	Accokeek	sand & quartz	cord-marked	body	none	8.4	sandy friable	30	S
989.003	1	---	sandstone	undetermined	body	undet	4.0	gritty friable	30	
989.004	1	Early Woodland	sand & quartz	undetermined	body	undet	7.6	sandy friable	40	
989.005	1	Accokeek	sand & quartz	cord-marked	body	none	5.0	gritty friable	20	
989.006	1	---	sand & quartz	unclassifiable	body	undet	7.4	sandy friable	40	
990.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	gritty friable	20	
991.001	1	Early Woodland	sand & quartz	cord-marked	body	none	7.8	sandy friable	30	
992.001	1	Accokeek	sand	cord-marked	body	none	7.0	gritty friable	30	
993.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	sandy friable	30	
994.001	1	---	oyster shell	undetermined	body	undet	6.6	clayey	10	
995.001	1	Early Woodland	sand & quartz	cord-marked	body	none	6.8	sandy friable	30	
996.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.3	sandy friable	30	
997.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.0	sandy friable	30	
998.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	7.0	sandy friable	40	
999.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.3	sandy friable	30	
1000.001	1	Accokeek	sand & quartz	cord-marked	body	none	9.0	sandy friable	30	
1001.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.2	gritty	10	
1002.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	5.7	sandy friable	40	
1004.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.3	sandy friable	30	
1005.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.2	sandy friable	30	
1008.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	sandy friable	30	
1009.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	5.0	sandy friable	30	
1009.002	1	Accokeek	sand	cord-marked	body	none	7.0	sandy friable	30	
1009.003	1	---	sandstone	undetermined	body	undet	4.8	gritty	10	
1009.004	1	Accokeek	sand & quartz	cord-marked	body	undet	7.0	sandy friable	30	
1009.005	1	Early Woodland	sand & quartz	unclassifiable	body	undet	6.0	sandy friable	40	
1009.006	1	Early Woodland	sand & quartz	unclassifiable	body	undet	7.0	sandy friable	40	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
1011.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	7.0	sandy friable	40	
1012.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.3	sandy friable	40	
1013.001	1	Accokeek	sand & quartz	cord-marked	body	none	9.6	sandy friable	40	
1014.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	6.8	sandy friable	30	
1015.001	1	---	sand & quartz	undetermined	body	none	6.0	gritty friable	30	
1016.001	1	Accokeek	sand & quartz	cord-marked	rim	undet	8.4	sandy friable	40	
1017.001	1	Accokeek	quartz	cord-marked	rim	undet	4.8	clayey	10	
1018.001	1	Accokeek	sand & quartz	cord-marked	body	none	9.6	sandy friable	40	
1019.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	40	
1020.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	sandy friable	40	
1021.001	1	---	sandstone	undetermined	rim	undet	6.8	clayey	10	
1022.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	6.2	sandy friable	40	
1023.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.2	sandy friable	30	
1025.001	1	---	(sherdlet)	---	---	---	0.0		0	
1026.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.7	sandy friable	30	
1027.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.4	sandy friable	30	
1028.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.0	sandy friable	40	
1029.001	1	Early Woodland	sand & quartz	undetermined	body	none	8.5	sandy friable	40	
1030.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.8	sandy friable	40	
1031.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	7.0	sandy friable	40	
1032.000	2	---	(sherdlet)	---	---	---	0.0		0	
1032.000	1	---	(sherdlet)	---	---	---	0.0		0	
1032.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	7.5	sandy friable	40	
1032.002	1	Early Woodland	sand & quartz	unclassifiable	body	undet	7.5	sandy friable	40	
1033.001	1	Early Woodland	sand	unclassifiable	body	undet	4.8	sandy friable	40	
1034.001	1	Accokeek	sand & quartz	undetermined	rim	undet	8.5	sandy friable	20	S
1035.001	1	Accokeek	sand & quartz	undetermined	body	undet	9.3	sandy friable	20	
1036.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	7.2	sandy friable	40	
1037.001	1	Early Woodland	sand & quartz	undetermined	rim	undet	8.5	gritty friable	30	
1038.001	1	Early Woodland	sand & quartz	cord-marked	body	none	8.3	sandy friable	40	
1039.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.7	sandy friable	30	
1040.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.4	sandy friable	40	
1041.001	1	---	(sherdlet)	---	---	---	0.0		0	
1043.001	1	---	sand & quartz	unclassifiable	body	undet	6.3	sandy friable	30	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
1045.000	1	---	(sherdlet)	---	---	---	0.0		0	
1046.001	1	Early Woodland	sand & quartz	undetermined	body	none	9.0	gritty friable	30	
1047.001	1	Accokeek	sand & quartz	cord-marked	rim	cord	7.0	sandy	30	S
1048.001	1	Early Woodland	sand & quartz	unclassifiable	rim	undet	6.0	sandy friable	40	
1050.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.4	sandy friable	30	
1051.001	1	Early Woodland	sand & quartz	undetermined	body	none	6.0	sandy friable	30	
1053.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	10.4	sandy friable	40	
1054.001	1	Early Woodland	sand & quartz	undetermined	body	none	8.0	sandy friable	40	
1055.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	sandy	30	S
1055.002	1	Accokeek	sand & quartz	cord-marked	body	none	6.0	sandy friable	30	
1056.001	1	Early Woodland	sand	unclassifiable	body	undet	7.0	sandy friable	30	
1057.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	6.8	sandy friable	30	
1058.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.9	sandy friable	30	
1060.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.0	sandy friable	40	
1061.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.9	sandy friable	40	
1061.002	1	Early Woodland	sand & quartz	unclassifiable	body	undet	6.2	sandy friable	40	
1062.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	sandy friable	30	
1064.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	8.2	sandy friable	40	
1065.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	6.7	sandy friable	40	
1066.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.4	sandy friable	40	
1067.000	1	---	(sherdlet)	---	---	---	0.0		0	
1068.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	8.0	sandy friable	40	
1069.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.6	sandy friable	40	
1071.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.7	sandy friable	40	
1073.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	40	
1074.001	1	Early Woodland	sand & quartz	undetermined	body	none	5.8	sandy friable	40	
1075.001	1	Early Woodland	sand & quartz	undetermined	body	none	7.2	gritty friable	20	S
1077.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.8	sandy friable	30	S
1079.000	1	---	(sherdlet)	---	---	---	0.0		0	
1081.000	1	---	(sherdlet)	---	---	---	0.0		0	
1085.001	1	---	sand & quartz	unclassifiable	body	undet	0.0	sandy friable	20	
1088.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.6	sandy friable	30	
1089.001	1	Early Woodland	sand & quartz	undetermined	body	none	6.8	sandy friable	40	
1090.001	1	Early Woodland	sand & quartz	unclassifiable	body	undet	8.6	sandy friable	40	

CERAMIC MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	#	TYPE NAME	TEMPER	SURFACE TREAT.	PORTION	DECOR.	THICK.	PASTE	SAND%	TWIST
1091.000	1	---	(sherdlet)	---	---	---	0.0		0	
1092.001	1	---	oyster shell	undetermined	body	none	8.7	clayey	10	
1094.000	1	---	(sherdlet)	---	---	---	0.0		0	
1094.001	1	Early Woodland	sand & quartz	undetermined	body	undet	8.0	sandy friable	40	
1094.002	1	---	oyster shell	unclassifiable	body	undet	6.6	clayey	10	
1103.000	1	---	(sherdlet)	---	---	---	0.0		0	
1106.001	1	Accokeek	sand & quartz	cord-marked	body	none	0.0	gritty friable	30	
1107.001	1	Early Woodland	sand & quartz	undetermined	body	none	6.0	sandy friable	30	S
1109.000	2	---	(sherdlet)	---	---	---	0.0		0	
1109.001	1	Early Woodland	sand & quartz	undetermined	body	undet	7.4	sandy friable	30	
1109.002	1	Early Woodland	sand & quartz	unclassifiable	body	undet	6.0	sandy friable	40	
1109.003	1	Early Woodland	sand & quartz	undetermined	body	none	6.8	sandy friable	40	
1110.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.2	gritty friable	30	S
1111.001	1	Accokeek	sand & quartz	cord-marked	rim	cord	7.3	gritty friable	30	
1118.000	3	---	(sherdlet)	---	---	---	0.0		0	
1118.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.2	gritty friable	30	S
1118.002	1	Early Woodland	sand & quartz	unclassifiable	body	undet	5.0	sandy friable	40	
1120.001	1	Accokeek	sand & quartz	cord-marked	body	none	6.4	gritty friable	30	S
1122.001	1	Accokeek	sand & quartz	cord-marked	rim	cord	8.0	gritty friable	30	S
1125.001	1	---	sand & quartz	unclassifiable	body	undet	0.0		0	
1131.001	1	Early Woodland	sand	unclassifiable	body	undet	8.0	sandy friable	40	
1140.000	1	---	(sherdlet)	---	---	---	0.0		0	
1149.001	1	Early Woodland	sand & quartz	undetermined	body	none	6.3	sandy friable	40	
1149.003	1	---	undetermined	unclassifiable	unknown	none	0.0		0	
1150.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	gritty friable	30	
1151.001	1	Accokeek	sand & quartz	cord-marked	body	none	8.0	gritty friable	30	
1153.001	1	Accokeek	sand & quartz	cord-marked	rim	none	6.3	gritty friable	30	
1154.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.5	sandy friable	40	Z
1155.001	1	Early Woodland	sand & quartz	undetermined	body	none	6.4	sandy friable	40	
1157.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.6	gritty friable	30	
1160.001	1	Accokeek	sand & quartz	cord-marked	body	none	7.4	gritty friable	20	S
1161.002	1	Early Woodland	sand & quartz	cord-marked	body	none	6.3	sandy friable	40	

Appendix F
Biface Measurements

BIFACE MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	TYPE	MAX. LENGTH	MAX. WIDTH	MAX. THICK	SHOULDER WIDTH	NECK WIDTH	BASE WIDTH	WIDTH/ THICK	ERROR(S)	COMMENTS
1.002		46	31	13	N/A	N/A	N/A	2.4	Thinning failure	Retains cortex, made on bipolared cobble
1.003	UNTYPED	22*	20	8	20	15	18*	2.5	Margin spall, undetermined error	Blade beveled
1.004	BEEKMAN TRIANGLE	21*	20	6	N/A	N/A	19	3.3	Impact fracture	Orientation unclear
1.005	LEVANNA	20*	21*	7	N/A	N/A	21*	3.0	Impact fracture, margin spall	Possibly made on a larger point fragment
1.006		29	21	8	N/A	N/A	N/A	2.7	Thinning failure	Large knot on 1 edge, tip appears utilized
1.007	UNTYPED	--	--	--	--	--	--	0.0	Reverse hinge fracture	Large broken outre passe flake including point tip
2.018		--	--	--	N/A	N/A	N/A	0.0	Undetermined error	Small fragment of large biface
7.001	LEVANNA	29	25	5	N/A	N/A	25	5.0	Margin spall	
8.001	LEVANNA	24*	28	6	N/A	N/A	28	4.7	Reverse hinge fracture	Lightly serrated
9.001	BEEKMAN TRIANGLE	30	20	7	N/A	N/A	20	2.9		Blade is beveled, convex sides
10.001	UNTYPED	--	--	8	--	--	--	0.0	Material flaw, perverse fracture	
11.001	NORMANSKILL	40*	20	9	20	11	18	2.2	Undetermined error	Exceptionally thick near tip
26.001	BARE ISLAND	56*	23	10	23	19	20	2.3	Margin spall	Heavily beveled blade
42.001		43*	30	10	N/A	N/A	N/A	3.0	End shock	
46.001		--	21*	11	N/A	N/A	N/A	1.9	Thinning failure, undetermined error	Retains cortex on base and tip
47.002	UNTYPED	--	--	--	--	15	20	0.0	Haft snap	
50.001		--	--	--	N/A	N/A	N/A	0.0	Margin spall	Retains cortex on 1 face
65.002		35*	16*	9*	N/A	N/A	N/A	0.0	Perverse fracture	
75.001	LAMOKA-LIKE	42	21	9	20	13	12	2.3		Base canted, several hinge fractures
81.006		--	30*	11*	N/A	N/A	N/A	0.0	Thinning failure, perverse fracture	
87.002	DRY BROOK FISHTAIL	48*	21	9	20	16	21	2.3	Impact fracture, thinning failure	Blade beveled, several hinge fractures
92.001	PISCATAWAY	37	14	8	14	N/A	0	1.8		Possibly used as a perforator
102.003	LEVANNA	22*	25	8	N/A	N/A	25	3.1	Thinning failure, undetermined error	
128.001	UNTYPED	--	--	10	--	--	--	0.0	Thinning failure, perverse fracture	Longitudinally curved
139.001	UNTYPED	--	--	--	--	20*	16	0.0	Haft snap	

BIFACE MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	TYPE	MAX. LENGTH	MAX. WIDTH	MAX. THICK	SHOULDER WIDTH	NECK WIDTH	BASE WIDTH	WIDTH/ THICK	ERROR(S)	COMMENTS
162.001	UNTYPED (LATE ARCHAIC)	53	23	18	23	20	15	1.3		Very weakley shouldered, convex base
173.002	UNTYPED	--	--	--	--	--	--	0.0	Thinning failure, undetermined error	
179.012		--	--	6*	N/A	N/A	N/A	0.0	Reverse hinge fracture, material flaw	
187.001	UNTYPED (LATE ARCHAIC)	--	--	--	--	21	24	0.0	Haft snap	Very slight grinding, probably Savannah River.
190.009	UNTYPED (LATE ARCHAIC)	--	--	--	--	20	21	0.0	Haft snap	
190.010	ELONGATE	30*	28	7	N/A	N/A	28	4.0	Reverse hinge fracture	
205.001	LEVANNA	31	25*	7	N/A	N/A	25*	3.6	Margin spall	Basal corner missing
211.001	ORIENT FISHTAIL	50	18	9	17	14	17*	2.0	Margin spall	Heavily beveled blade
213.001	UNTYPED	--	--	--	--	--	--	0.0	End shock	
214.001	NORMANSKILL	43	22	9	22	12	14*	2.4	Margin spall, thinning failure	Possibly resharpened w. severe hinges along 1 side
217.001	PISCATAWAY	35	13	7	13	N/A	0	1.9		Clear manufacturing reject w. some wear on tip
231.004		--	--	10*	N/A	N/A	N/A	0.0	Reverse hinge fracture	End of large biface
239.001	NORMANSKILL	43	17	8	17	12	14*	2.1	Margin spall	Possibly used as graver/perforator, beveled
262.001	VERNON	43	25*	9	25*	15	19	2.3	Margin spall	Blade is beveled, edges assymetrical
267.002		--	--	--	N/A	N/A	N/A	0.0	Undetermined error	Retains cortex on 1 end, quartz is rutilated
270.002		--	16*	10	N/A	N/A	N/A	1.6	Thinning failure, undetermined error	Narrow "blade"
275.001		36*	25	8	N/A	N/A	N/A	3.1	Perverse fracture	Used as piece esquillee?
293.001	UNTYPED	27*	17	6	N/A	N/A	17	2.8	Impact fracture, haft snap	Probably a stemmed point fragment
310.004	UNTYPED	19*	18*	5	N/A	N/A	18*	3.6	Thinning failure	Oolitic chert, all 3 corners missing
314.001	UNTYPED (EARLY ARCHAIC)	41*	28	9	N/A	N/A	28	3.1	Impact fracture, haft snap	Lightly serrated, assymetrical blade edges
323.001		22	18	7	N/A	N/A	N/A	2.6	Margin spall	Crudely flaked and assymetrical
324.001		75	42	16	N/A	N/A	N/A	2.6	Thinning failure, perverse fracture	Large quarry blank?
327.001	UNTYPED	35*	--	--	--	--	--	0.0	Material flaw, thinning failure	Longitudinal fragment
332.003	UNTYPED	31*	21	8	21	17	20	2.6	Impact fracture	Only 1 notch is ground
333.001		--	--	--	N/A	N/A	N/A	0.0	Material flaw	Possibly a projectile point basal fragment

BIFACE MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	TYPE	MAX. LENGTH	MAX. WIDTH	MAX. THICK	SHOULDER WIDTH	NECK WIDTH	BASE WIDTH	WIDTH/ THICK	ERROR(S)	COMMENTS
339.001		--	--	9*	N/A	N/A	N/A	0.0	Material flaw	Retains cortex on 1 face
351.001	BARE ISLAND	71*	35	10	35	24	15	3.5	Undetermined error	
352.001	PISCATAWAY	28*	15	7	15	N/A	0	2.1		
354.003		--	30	6	N/A	N/A	N/A	0.0	Material flaw, undetermined error	Retains cortex on 1 face, poss. used as graver
354.004		22	20	9	N/A	N/A	N/A	2.2	Thinning failure	Small biface w. large scars, exhausted core?
404.011		--	--	--	N/A	N/A	N/A	0.0	Undetermined error	
461.001		--	--	--	N/A	N/A	N/A	0.0	Undetermined error	Conceivably a bipolar core fragment
463.001		--	--	11*	N/A	N/A	N/A	0.0	Perverse fracture	Incompletely edged large biface fragment
464.001	VERNON	37	23	9	23	12	14	2.6	Thinning failure, undetermined error	Grinding at jct. of neck and shoulders only
470.001		47*	41*	15*	N/A	N/A	N/A	2.7	Perverse fracture, undetermined error	Large portion of 1 face and 1 edge missing
488.001		--	--	--	N/A	N/A	N/A	0.0	Perverse fracture, undetermined error	Questionable biface
489.001	SUSQUEHANNA BROADSPEAR	36*	26	9	26	16	21	2.9	Margin spall, material flaw, undetermined error	Possible massive impact fracture.
531.001	UNTYPED	--	--	--	--	--	--	0.0	Undetermined error	Heavily weathered, very small tip fragment
534.001	BREWERTON EARED-NOTCHED	46	22	8	20	17	22	2.8	Thinning failure	Crudely flaked, assymetrical
536.001	SUSQUEHANNA BROADSPEAR	25*	26	7	26	19	24	3.7	Undetermined error	
595.001	BEEKMAN TRIANGLE	25	20*	6	N/A	N/A	22*	3.3	Material flaw, undetermined error	Appears to be made on a larger point fragment
619.001		41*	28	13	N/A	N/A	N/A	2.2	Perverse fracture, material flaw	
623.001		--	23*	11	N/A	N/A	N/A	2.1	Material flaw, undetermined error	
640.001		--	--	--	N/A	N/A	N/A	0.0	Undetermined error	
655.001		--	--	--	N/A	N/A	N/A	0.0	Material flaw	Possible projectile point fragment
655.003		--	--	--	N/A	N/A	N/A	0.0	Undetermined error	Orientation unclear
665.008		--	--	--	N/A	N/A	N/A	0.0	Material flaw, undetermined error	Interior frag. w. no edges but parts of both faces
666.001		36*	25	12	N/A	N/A	N/A	2.1	Material flaw, undetermined error	Cortex on 1 face, prob. made on bipolared cobble

BIFACE MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	TYPE	MAX. LENGTH	MAX. WIDTH	MAX. THICK	SHOULDER WIDTH	NECK WIDTH	BASE WIDTH	WIDTH/ THICK	ERROR(S)	COMMENTS
667.001		--	--	--	N/A	N/A	N/A	0.0	Undetermined error	Small midsection, poss. a projectile point frag
671.001	PISCATAWAY	41	18	10	17	N/A	0	1.8		Piscataway form but wear and x-section drill-like
675.001		--	--	--	N/A	N/A	N/A	0.0	Margin spall	Possible projectile point fragment
678.001		46	24	12	N/A	N/A	N/A	2.0	Thinning failure	Plano-convex cross-section
686.002		--	--	--	N/A	N/A	N/A	0.0	Material flaw, thermal error	Possible projectile point fragment
698.001		--	--	--	N/A	N/A	N/A	0.0	Material flaw, undetermined error	Orientation unclear
707.001	PISCATAWAY	34*	16	7	15	N/A	0	2.3	Impact fracture	
709.001	VERNON	35	20	7	20	10	11	2.9		Assymetrical blade edges
723.001	MADISON	13*	21	5	N/A	N/A	21	4.2	Material flaw	
737.001	POTTS CORNER-NOTCHED	30*	18	5	18	15	15	3.6	Undetermined error	Heavily weathered
748.001	UNTYPED	--	--	--	--	--	--	0.0	Undetermined error	Orientation unclear, could be tip, base, or corner
760.001	UNTYPED	30*	31	13	31	19	8	2.4	Perverse fracture, material flaw	Clear manufacturing reject, "stem" not intentional
760.002		--	28*	10	N/A	N/A	N/A	2.8	Material flaw, undetermined error	Retains cortex on 1 edge and face
761.001		--	24	10	N/A	N/A	N/A	0.0	Material flaw	Possible bipolar core frag., used as scraper?
766.001	UNTYPED (LATE ARCHAIC)	61	22	9	22	15	14	2.4		Similar to Bare Island type but stem is too short
768.001	CALVERT	33*	23	8	23	16	12	2.9	Margin spall, impact fracture	"Stem" is partially the result of a margin spall
791.001	PISCATAWAY	45	19	9	18	N/A	0	2.1		Thick blade with hinge fracture
869.001	PISCATAWAY	34*	15	7	15	N/A	0	2.1	Impact fracture	Exceptionally thick tip
881.001		61*	54	15	N/A	N/A	N/A	3.6	Material flaw, perverse fracture, thinning failure	Possible polish on 1 end
892.001	UNTYPED (LATE ARCHAIC)	--	--	6	--	--	--	0.0	Material flaw	Probably a Piscataway point midsection
897.003		26*	19*	9	19*	17*	10*	0.0	Material flaw	Possible projectile point fragment
900.001		34*	34	12	N/A	N/A	N/A	2.3	Thinning failure, undetermined error	Retains cortex on 1 face
941.001	BREWERTON EARED-NOTCHED	38	20	10	19	15	20	2.0		Whole but with serious material flaw, thick
1093.00	BARE ISLAND	37*	25	9	25	19	17	2.8	Impact fracture, margin spall	Very slight grinding

BIFACE MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	TYPE	MAX. LENGTH	MAX. WIDTH	MAX. THICK	SHOULDER WIDTH	NECK WIDTH	BASE WIDTH	WIDTH/ THICK	ERROR(S)	COMMENTS
1112.00	UNTYPED	--	--	5	--	--	--	0.0	Undetermined error	Heavily weathered, narrow tip
1128.00		--	24*	8*	N/A	N/A	N/A	0.0	Undetermined error	
1129.00		--	--	--	N/A	N/A	N/A	0.0	Material flaw, thinning failure, reverse hinge fracture	Small tip fragment
1132.00		32*	34	12	N/A	N/A	N/A	2.8	Perverse fracture, thinning failure	
1161.00	PISCATAWAY	37	15	8	15	N/A	0	1.8	Thinning failure	Not completely edged
1175.00	VERNON	38	21*	8	21*	14	15*	2.6	Impact fracture, margin spall	Resharpened along 1 edge after impact fracture

Appendix G
Uniface Measurements

UNIFACE MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	MAX.LENGTH	MAX.WIDTH	MAX.THICK	EDGE ANGLE	COMMENTS
1.008	29*	29	6	20	unifacial retouch along 2 edges, 2nd edge 12 deg.
2.019	32	23	13	65	recycled from a broken hammerstone?, cortex
61.001	16	13	5	31	unif. retouch on lower platform opp. damaged side
71.001	42	18	12	80	natural bedding plane forms ventral surface
81.007	20*	33*	10	65	made on cobble spall
102.001	11*	14	3	22	unifacial retouch on 1 concave edge
107.004	55	40	12	42	ret. on bipolar core to form backed knife, quest.
131.003	9	10	2	23	retouch and polish on termination
134.001	41	40	11	58	unifacial retouch on 2 edges, opp. sides, hafted?
134.002	23*	16	5	26	unifacial retouch along 1 edge
144.001	19	14	5	38	poss. retouch over neg. flk. scar to isolate spur
164.001	22*	15	4	28	unifacial utilization on 1 edge
170.002	14*	14	3	21	unifacial retouch on 3 edges, poss. graver spur
226.004	28	20	7	54	2 areas of unif. retouch on 1 edge, opposite sides
237.015	23*	15*	7	67	unifacial retouch on termination & adjactent edge
283.005	22	15	7	54	unifacial retouch on 1 edge
298.001	38	19	8	43	poss. ret. near top platform on ventral surface
319.003	34	21	5	48	4 graver spurs, 1 retouched edge
328.001	61	40	11	31	unif. ret. on 1 edge near projection, pt.poss. use
333.002	27	19	7	54	unifacial retouch on 2 concave edges
353.001	50	21	10	58	1 area of unifacial retouch, also edge damage
389.001	56	33	11	39	made on large decort. flk., prob. knife function
524.001	80	49	10	45	retouched large sandstone spall, FCR
526.001	30*	31*	11*	39	Bifacial retouch w. polish/grinding on 3 edges
530.001	56	39	17	71	poss. unifacial retouch on 2 edges of projection
700.001	29	35	14	52	bipolar core w. poss. unifacial retouch on 1 edge
760.004	18	17	4	72	steep working edge on very thin flake
778.003	21	21	5	25	unifacial retouch on 3 edges
867.001	14*	18*	9	65	2 poss. concave & convex working edges, core frag
875.001	29	23	13	78	made on bipolared pebble
913.001	27	24	9	62	made on bipolared pebble
978.001	55	29	13	30	unifacial retouched along 1 concave edge
989.007	13*	8	1*	14	unifacial retouch on 1 edge, broken after use
1140.001	17	11*	3	41	unifacial retouch on 1 edge

Appendix H
Core Measurements

CORE MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	TYPE	PLATFORM PAIRS	WEIGHT (g)	MAX.LENGTH	MAX.WIDTH	MAX.THICK
5.001	UNCLASSIFIABLE	-	24	44	30	19
33.001	BIPOLAR	1	6	33	21	8
42.002	UNCLASSIFIABLE	-	3	23	18	7
46.002	BIPOLAR	1	8	33	24	10
52.001	BIPOLAR	1	16	43	22	15
54.001	BIPOLAR	2	5	25	18	11
54.002	BIPOLAR	2	16	36	24	20
60.001	BIPOLAR	2	1	14	14	7
63.001	BIPOLAR	2	6	25	21	14
68.001	BIPOLAR	2	6	21	18	15
69.001	BIPOLAR	1	14	32	40	10
70.004	MULTIFACIAL FLAKE CORE	-	82	65	39	45
71.013	UNCLASSIFIABLE	-		30	28	14
85.005	BIPOLAR	3	3	23	16	10
86.005	BIPOLAR	3	3	20	18	9
107.001	BIPOLAR	3	33	52	34	24
107.003	BIPOLAR	2	4	29	20	7
108.001	BIPOLAR	1	7	26	24	12
121.001	BIPOLAR	2	2	24	17	7
130.001	MULTIFACIAL FLAKE CORE	-	11	34	25	15
136.001	BIPOLAR	1	15	45	27	14
146.004	BIPOLAR	4	17	36	27	17
146.005	UNCLASSIFIABLE	-	13	41	38	9
153.001	MULTIFACIAL FLAKE CORE	-	50	44	32	24
170.001	MULTIFACIAL FLAKE CORE	-	39	51	34	19
170.003	UNCLASSIFIABLE	-	3	21	17	9
176.002	BIPOLAR	1	10	25	26	15
179.006	BIPOLAR	1	12	11	29	25
179.007	BIPOLAR	2	2	17	16	7
179.008	BIPOLAR	3	8	28	16	16
179.009	BIPOLAR	3	3	17	16	11
179.010	BIPOLAR	3	5	28	20	10
179.011	BIPOLAR	1	15	28	18	29

CORE MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	TYPE	PLATFORM PAIRS	WEIGHT (g)	MAX.LENGTH	MAX.WIDTH	MAX.THICK
191.014	BIPOLAR	4	9	41	24	8
191.015	BIPOLAR	1	5	27	15	10
191.016	BIPOLAR	2	14	32	23	17
191.017	BIPOLAR	2	21	41	37	17
196.001	BIPOLAR	3	8	34	27	9
200.001	BIPOLAR	1	3	16	16	8
200.002	BIPOLAR	2	6	22	20	4
204.001	BIPOLAR	1	7	32	21	9
206.001	BIPOLAR	3	24	43	35	25
213.002	BIPOLAR	2	8	23	18	14
218.001	BIPOLAR	2	1	19	13	6
225.004	BIPOLAR	2	2	13	11	8
227.001	BIPOLAR	1	4	23	17	10
227.002	BIPOLAR	1	1	12	15	8
227.003	BIPOLAR	1	1	20	10	7
227.004	BIPOLAR	2	1	12	12	10
230.005	BIPOLAR	2	11	40	23	12
230.006	BIPOLAR	1	4	25	12	12
230.007	BIPOLAR	1	7	51	19	9
230.008	BIPOLAR	1	14	36	23	16
231.001	MULTIFACIAL FLAKE CORE	-	17	34	32	16
231.002	BIPOLAR	2	6	24	18	11
232.001	BIPOLAR	1	9	32	15	18
237.013	BIPOLAR	1	2	21	12	5
237.014	BIPOLAR	1	1	16	9	9
267.003	MULTIFACIAL FLAKE CORE	-	16	35	28	15
270.001	BIPOLAR	1	7	23	15	14
272.002	UNCLASSIFIABLE	-	13	41	28	16
301.012	BIPOLAR	1	5	16	26	11
316.001	BIPOLAR	2	2	19	13	9
318.003	UNCLASSIFIABLE	-	3	21	20	8
319.001	BIPOLAR	2	13	41	29	15
319.002	BIPOLAR	1	5	35	16	13

CORE MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	TYPE	PLATFORM PAIRS	WEIGHT (g)	MAX.LENGTH	MAX.WIDTH	MAX.THICK
322.001	BIPOLAR	1	10	36	22	14
322.002	UNCLASSIFIABLE	-	6	31	15	14
329.001	BIPOLAR	1	6	27	25	12
348.001	BIPOLAR	1	8	29	17	13
355.010	BIPOLAR	1	12	32	21	13
356.001	BIPOLAR	1	7	38	22	8
374.001	BIPOLAR	1	1	14	9	6
374.003	BIPOLAR	2	4	24	15	10
404.010	UNCLASSIFIABLE	-	7	43	16	12
421.001	MULTIFACIAL FLAKE CORE	-	50	48	40	23
423.001	UNCLASSIFIABLE	-	12	53	18	19
427.001	BIPOLAR	1	2	27	12	9
430.001	UNCLASSIFIABLE	-	8	45	20	12
448.001	BIPOLAR	2	14	45	29	13
455.001	UNCLASSIFIABLE	-	14	51	24	23
465.009	BIPOLAR	1	8	29	24	11
465.010	BIPOLAR	2	2	22	14	7
467.002	BIPOLAR	1	2	19	14	9
467.003	BIPOLAR	1	3	14	20	8
480.001	UNCLASSIFIABLE	-	10	47	23	12
484.001	BIPOLAR	2	2	17	16	6
494.001	BIPOLAR	3	7	23	26	12
497.001	BIPOLAR	2	5	30	23	10
502.001	UNCLASSIFIABLE	-	4	31	20	9
513.001	BIPOLAR	1	5	21	21	9
513.002	BIPOLAR	1	6	28	21	9
516.001	MULTIFACIAL FLAKE CORE	-	26	38	27	24
531.002	UNCLASSIFIABLE	-	3	23	15	7
535.001	BIPOLAR	1	1	9	18	7
542.001	UNCLASSIFIABLE	-	7	28	21	13
568.001	BIPOLAR	1	3	33	12	8
573.001	UNCLASSIFIABLE	-	11	34	27	11
576.001	BIPOLAR	2	8	30	24	11

CORE MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	TYPE	PLATFORM PAIRS	WEIGHT (g)	MAX.LENGTH	MAX.WIDTH	MAX.THICK
581.001	BIPOLAR	2	26	45	41	13
585.001	MULTIFACIAL FLAKE CORE	-	20	40	34	18
595.005	MULTIFACIAL FLAKE CORE	-	126	70	52	33
605.001	BIPOLAR	2	7	29	27	13
665.001	BIPOLAR	1	3	21	23	11
665.007	UNCLASSIFIABLE	-	2	20	12	7
665.009	BIPOLAR	2	5	22	24	10
665.010	BIPOLAR	1	3	20	18	8
668.001	MULTIFACIAL FLAKE CORE	-	11	44	25	12
694.001	BIPOLAR	2	22	39	31	16
697.001	MULTIFACIAL FLAKE CORE	-	26	46	34	17
706.001	BIPOLAR	1	46	68	42	15
713.002	BIPOLAR	2	6	23	20	10
746.001	MULTIFACIAL FLAKE CORE	-	11	33	19	17
757.004	BIPOLAR	2	1	20	7	7
870.001	UNCLASSIFIABLE	-	29	43	42	12
873.001	BIPOLAR	3	17	34	24	16
899.006	BIPOLAR	2	8	28	33	14
907.002	BIPOLAR	1	5	23	26	7
959.001	BIPOLAR	2	3	20	19	14
1052.001	BIPOLAR	2	6	25	21	10
1070.001	BIPOLAR	2	11	36	24	14
1080.001	BIPOLAR	2	8	28	27	14
1092.002	BIPOLAR	2	9	26	19	14
1095.001	BIPOLAR	3	52	54	38	24
1138.001	BIPOLAR	2	5	25	22	10
1140.001	BIPOLAR	2	7	29	20	13
1140.002	BIPOLAR	1	3	20	15	7
1146.001	UNCLASSIFIABLE	-	4	35	16	10
1149.002	UNCLASSIFIABLE	-	4	25	20	10
1161.003	BIPOLAR	1	9	39	16	13

Appendix I
Ground/Use-Modified Measurements

GROUND/USE-MODIFIED ARTIFACT MEASUREMENTS
KETTERING SITE 18PR174

LOT NO.	WEIGHT	COMMENTS
3.001	308	1 battered area, cobble used as unsuccessful core?
176.001	73	battered on 1 surface
180.001		soapstone body sherd
192.005	153	elongated and end-battered, poss. small pestle
207.001	145	slight face battering, poss. used as chopper
233.001	47	end-battered, pronounced on 1 end, slight on other
749.001	347	6 small areas of battering
753.001	76	battering on 1 surface, split from hammerstone use
868.001	59	3 battered areas, 1 bipol. flk. removal, FCR
1124.001	4	fragment with polished surface & drilled hole

Appendix J
Maryland Archeological Site Survey Form (Updated)

MARYLAND ARCHEOLOGICAL SITE SURVEY: BASIC DATA FORM

Maryland Department of Natural Resources
Division of Archeology

Maryland Geological Survey
2300 St. Paul Street
Baltimore, Maryland 21218

Site Number 18 PR174

(Shaded areas are for Division of Archeology use only)

A. Designation

1. County: Prince Georges
2. Site Number: 18PR174
3. Site Name: Kettering Park
4. Site Type (check all applicable):
   - x Prehistoric
   - ___ Historic
   - ___ Unknown
5. Maryland Archeological Research Unit Number: 8

B. Location

6. USGS 7.5' Quadrangle(s): Lanham 1971
   (Photocopy section of quad(s) on page 4 and mark site location)
7. UTM Coordinates at Center of Site Zone: ___
8. Easting: ___
9. Northing: ___
10. Physiographic Province (check one):
    - ___ Allegheny Plateau
    - ___ Ridge and Valley
    - ___ Great Valley
    - ___ Blue Ridge
    - ___ Lancaster/Frederick Lowland
    - ___ Eastern Piedmont
    - x Western Shore Coastal Plain
    - ___ Eastern Shore Coastal Plain
11. Nearest Water Source: Western and Northern Branches ___ Order
12. 2nd Nearest Water Source: ___ Order
13. 3rd Nearest Water Source: ___ Order
14. 4th Nearest Water Source: ___ Order

BASIC DATA FORM

C. Environmental Data

15. Closest Surface Water Type (check all applicable):

____ Ocean	x Freshwater Stream/River
____ Estuarine Bay/Tidal River	____ Freshwater Swamp
____ Tidal or Marsh	____ Lake or Pond
	____ Spring

16. Distance from closest surface water: 0 meters (or 0 feet)

17. SCS Typology:

18. Topographic Settings (check all applicable):

____ Floodplain	____ Hilltop/Bluff
____ Interior Flat	____ Upland Flat
____ Terrace	____ Ridgetop
x Low Terrace	____ Rockshelter/Cave
____ High Terrace	____ Unknown
____ Hillslope	____ Other:

19. Slope:

20. Elevation: ____ meters (or ____ feet) above sea level

21. Land use at site when last field checked: ____ Date

(check all applicable)

X Plowed/Tilled	____ Extractive
____ No-Till	____ Military
X Wooded/Forested	X Recreational
____ Logging/Logged	____ Residential
____ Underbrush/Overgrown	____ Ruin
____ Pasture	____ Standing Structure
____ Cemetery	____ Transportation
____ Commercial	____ Unknown
____ Educational	____ Other:

22. Condition of Site (check all applicable): ____ Date

____ UNDISTURBED	DESTROYED	____ UNKNOWN
	X minor (0-10%)	
DISTURBED	____ moderate (10-60%)	
X Plowed	____ major (60-99%)	
____ Eroded	____ total (100%)	
____ Graded/Contoured	____ % unknown	
____ Collected		
____ Vandalized		
____ Dredged		
____ Other:		

23. Additional Comments on Environment:

7. Description

24. Site Type A (check all applicable):

PREHISTORIC
- X Lithics
- x Ceramics
- ___ Shell Midden
- ___ Unknown
- ___ Other: _____

HISTORIC
- ___ Cemetery
- Domestic:
  - ___ urban
  - ___ rural
- ___ Educational
- Industrial:
  - ___ urban
  - ___ rural
- ___ Military
- ___ Religious
- ___ Water Transportation
- ___ Unknown
- ___ Other: _____

___ UNKNOWN

25. Site Type B (check one):

X Terrestrial ___ Underwater ___ Both

26. Cultural Affiliation (check all applicable):

PREHISTORIC
- ___ Unknown
- ___ Paleoindian
- x Archaic
- X Early Archaic
- X Middle Archaic
- X Late Archaic
- x Woodland
- X Early Woodland
- x Middle Woodland
- x Late Woodland
- ___ CONTACT

HISTORIC
- ___ Unknown

17th century
- ___ 1630-1675
- ___ 1675-1720

18th century
- ___ 1720-1780
- ___ 1780-1820

19th century
- ___ 1820-1860
- ___ 1860-1900

20th century
- ___ 1900-1930
- ___ post 1930

___ UNKNOWN

27. State Plan Themes: _____

28. Site length: ___ meters (or ___ feet)

29. Site width: ___ meters (or ___ feet)

30. Is site confined to plowzone?
- ___ Yes
- x No
- ___ Unknown

31. Does site have subsurface integrity?
- x Yes
- ___ No
- ___ Unknown

BASIC DATA FORM

Photocopy section of quadrangle map(s) and mark site location with heavy dot or circle and arrow.

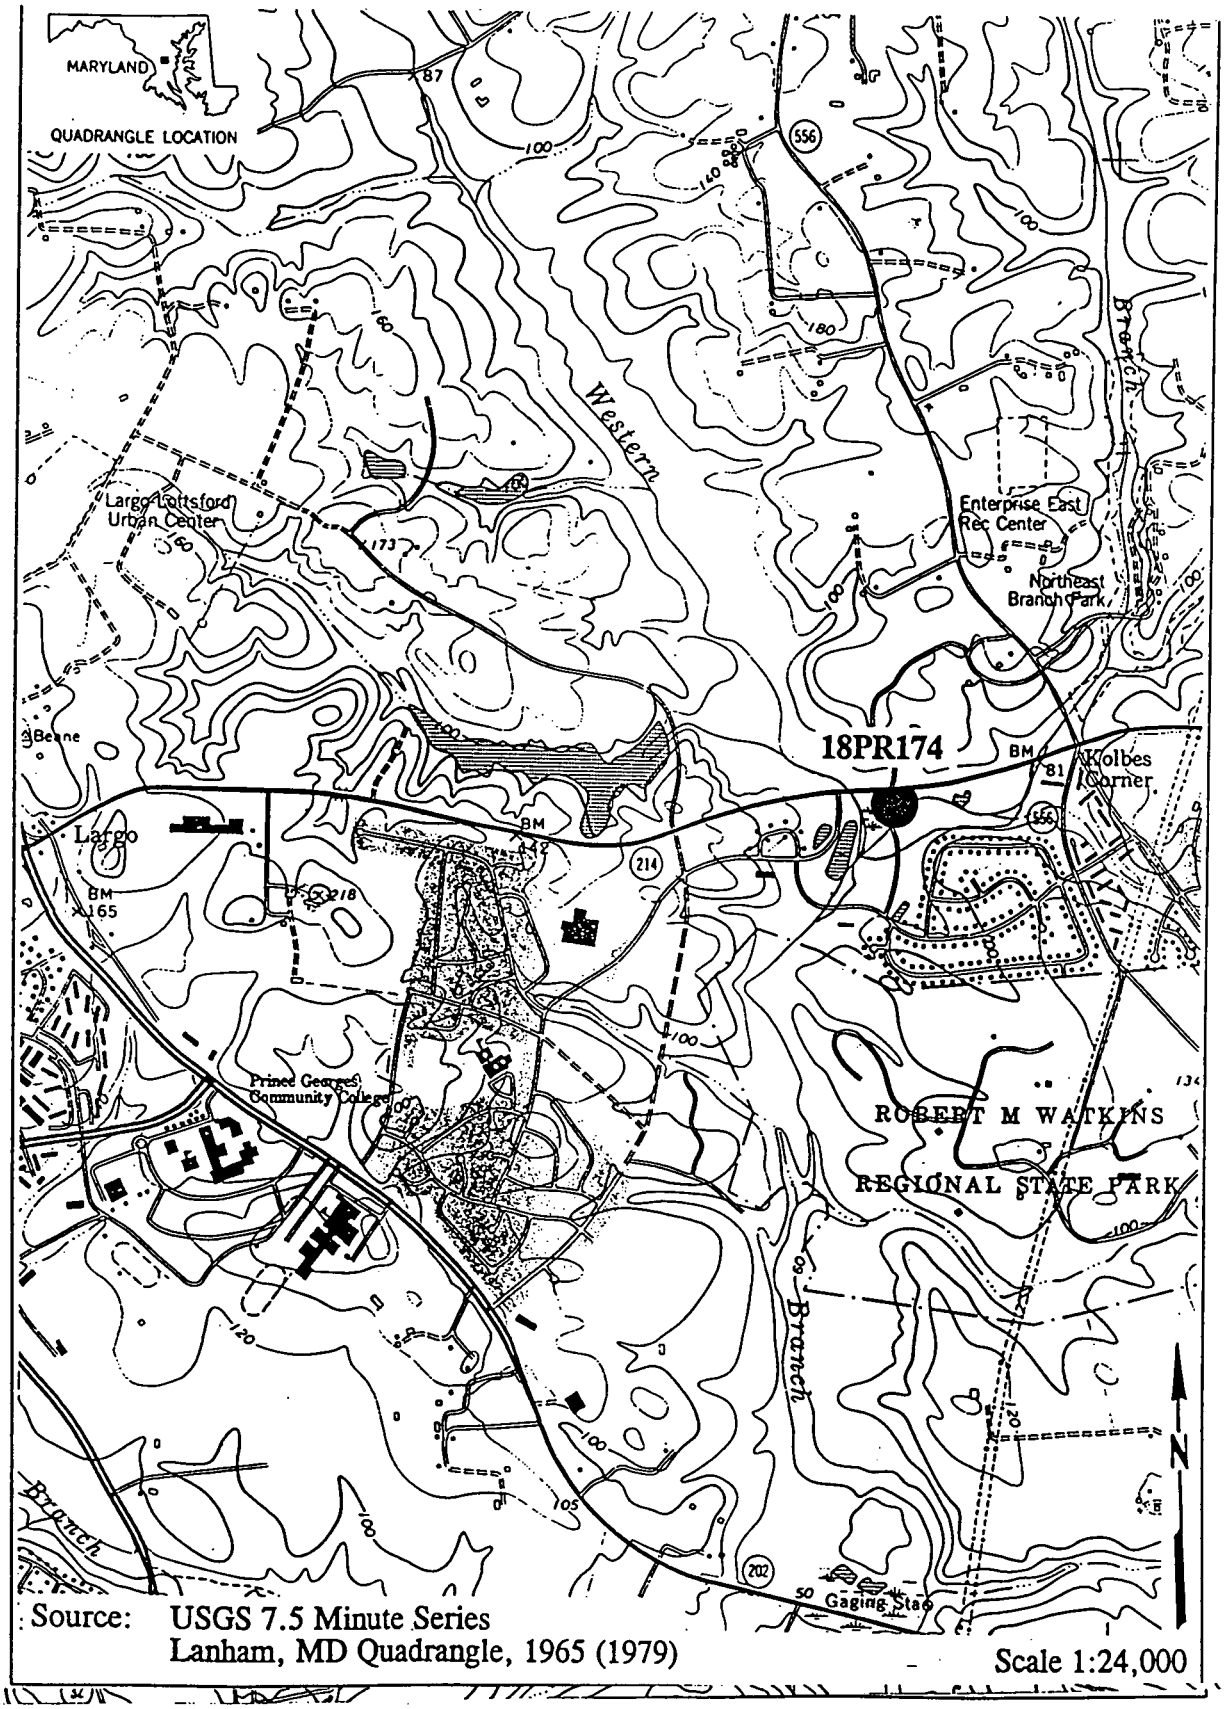

Source: USGS 7.5 Minute Series
Lanham, MD Quadrangle, 1965 (1979)

Scale 1:24,000

Kettering Park Site

Figure 2
Project

E. Support Data (Use additional sheets if needed)

32. Accompanying Data Form(s):

x Prehistoric
___ Historic
___ Submerged
___ Shipwreck

33. Ownership:

x Private
___ Public
___ Unknown

34. Owner: Carrolton Realty, 11620 West Branch Drive, Kettering, Upper Marlboro
Address: 1160 West Branch Drive Kettering Upper Marlboro, MD 20870
Phone: (301(249-9553 Date: 7/26/79

35. Tenant:
Address:
Phone: Date:

36. Known Investigations: Phase I Survey ,Terrence Epperson Director
Phase II Testing Maureen Kavanagh, Silas Hurry Directors
Phase III Excavation Maureen Kavanagh, Silas Hurry Directors

37. Reports (Author & year): Terrence Epperson 1979
Heidy Fogel and Dennis Knepper 1993

38. Other Records?

x Yes
___ No
___ Unknown

39. If YES, type and location: All Fieldnotes, Photographs, dBase III+ files will be deposited at the Maryland Historic Trust

40. Collections?

X Yes
___ No
___ Unknown

41. If YES, give owner and location: All artifact will be curated at the the Maryland Historic Trust Facilities

42. Artifact Conservation?

x Yes
___ Partial
___ No
___ Unknown

BASIC DATA FORM

43. Maryland Register Status:

____ Listed on register
____ Nomination pending
__x__ Determined eligible (formal)
____ Considered eligible (consensus)
____ Not eligible
____ Insufficient data

44. National Register Status:

____ Listed on register
____ Nomination pending
__x__ Determined eligible (formal)
____ Considered eligible (consensus)
____ Not eligible
____ Insufficient data

45. Informant: _____
Address: _____
Phone: _____ Date: _____

46. Site visited by: _____
Address: _____
Phone: _____ Date: _____

47. Form filled out by: Heidy Fogel
Address: 1133 15th Street N.W. Suite 700 Washington D.C.
Phone: (202) 775-3495 Date: Nov. 3, 199

48. Additional Comments:

For Division of Archeology Use Only

49. Form transcribed by: _____ 50. Date: _____
51. Form checked by: _____
52. Entered on computer by: _____ 53. Date: _____
54. Form updated by: _____ 55. Date: _____

MARYLAND ARCHEOLOGICAL SITE SURVEY: PREHISTORIC DATA FORM

Site Number 18 PR174

(Shaded areas are for Division of Archeology use only)

1. Site type (check all applicable):

____	village	____	earthen mound
____	hamlet	____	shell midden
____	base camp	____	fish weir
____	short-term resource procurement	____	submerged prehistoric
____	lithic quarry/extraction	____	lithic scatter
____	rockshelter/cave	X	unknown
____	cairn	____	other:

2. Categories of aboriginal material or remains present at site (check all applicable):

X	flaked stone	____	human skeletal remains
X	ground stone	____	faunal implements/ornaments
X	stone bowls	X	faunal material
X	fire-cracked rock	____	oyster shell
X	other lithics	____	floral material
X	ceramics (vessels)	____	unknown
____	other fired clay	____	other:

3. Lithic materials (check all applicable):

X	jasper	X	steatite
X	chert	X	sandstone
X	rhyolite	____	silicified sandstone
X	quartz	____	ferruginous quartzite
X	quartzite	____	European flint
____	chalcedony	____	basalt
____	ironstone	____	unknown
X	argillite	____	other:

4. Diagnostics (choose from manual and give number recovered or observed):

8 Piscataways	1 Potts Corner-Notched
4 Vernons	1 Calvert
1 Madison	2 Susquehanna Broadspears
8 Levannas	1 Drybrook Fishtail
	1 Orient Fishtail

5. Features present:

X	yes
____	no
____	unknown

6. Types of features identified (check all applicable):

____	midden		
____	postmolds	____	refuse/storage pits
____	house patterns	____	burials
____	palisade	____	ossuaries
____	hearths	____	unknown
X	chipping clusters	____	other:

PREHISTORIC DATA FORM

7. Method of sampling (check all applicable):
   - x non-systematic surface search
   - x systematic surface collection
   - x non-systematic shovel test pits
   - x systematic shovel test pits
   - x excavation units
   - ____ mechanical excavation
   - ____ other: ____

   extent/nature of excavation: ____

8. Flotation samples collected:
   - ____ yes
   - ____ no
   - x unknown

   analyzed:
   - ____ yes, by ____
   - ____ no
   - ____ unknown

9. Samples for radiocarbon dating collected:
   - ____ yes
   - ____ no
   - x unknown

   Dates and Lab Reference Nos. ____

10. Soil samples collected:
    - x yes
    - ____ no
    - ____ unknown

    analyzed:
    - ____ yes, by ____
    - ____ no
    - ____ unknown

11. Other analyses (specify): Blood Residue

12. Additional comments: Additional Diagnostics 2 Brewerton Ear-Notched, 3 Bare Islands, 3 Normanskills,449 Accokeek Sherds, 2 Marcey Creek sherds, 3 Selden Island sherds, 10 Mockley Sherds, 53 Townsend Sherds, 6 Moyaone Sherds, 1 Potomac Creek Sherd, 1 Shepard Ware Sherd, 16 Riggins Ware sherds

13. Form filled out by: Heidy Fogel
    Address/Affiliation: Engineering Science 1133 15th Stree Suite 700 Washington D.
    Date: 11-3-93

For Division of Archeology Use Only

14. Form transcribed by: ____ 15. Date: ____
16. Form checked by: ____
17. Entered on computer by: ____ 18. Date: ____
19. Form updated by: ____ 20. Date: ____